



- (51) International Patent Classification: Not classified
- (21) International Application Number: PCT/EP2012/059765
- (22) International Filing Date: 24 May 2012 (24.05.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 1108693.1 24 May 2011 (24.05.2011) GB
- (71) Applicant (for all designated States except US): PARADIGM OILFIELD TECHNOLOGIES B.V. [NL/NL]; Galvaniweg 13, NL-4207 HL Gorinchem (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): HUIZER, Jan, Arie, Aldo [NL/NL]; Rivierdijk 370, NL-3372 BT Hardinxveld-Giessendam (NL).
- (74) Agent: SHANKS, Andrew; AURORA, 120 Bothwell Street, Glasgow G2 7JS (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: WIRELINE APPARATUS

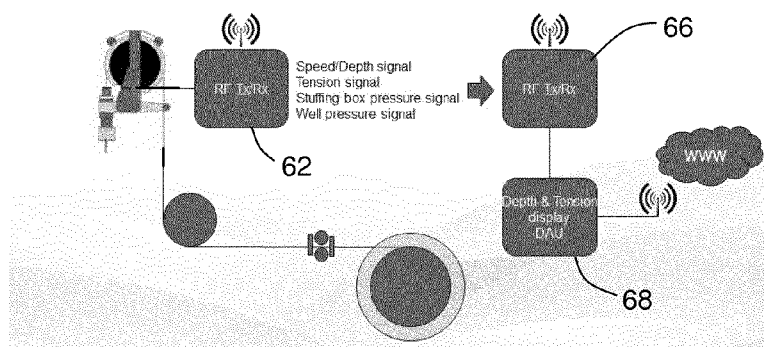


Figure 4

(57) Abstract: A wireline apparatus comprises a sheave for accommodating a wireline and a sheave mounting configured for coupling to a wireline stuffing box. The apparatus includes a sensor for measuring at least one of wireline tension and deployed wireline length at the sheave.