



(43) International Publication Date
3 October 2013 (03.10.2013)

- (51) International Patent Classification:
F24F 3/16 (2006.01)
- (21) International Application Number:
PCT/GB2013/050724
- (22) International Filing Date:
20 March 2013 (20.03.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1205557.0 29 March 2012 (29.03.2012) GB
- (71) Applicant: **HOWORTH AIR TECHNOLOGY LIMITED** [GB/GB]; Lorne Street, Farnworth BL4 7LZ (GB).
- (72) Inventor: **BROMLEY, Graham**; c/o Howorth Air Technology Limited, Lorne Street, Farnworth BL4 7LZ (GB).
- (74) Agents: **HUTTER, Anton** et al.; Venner Shipley LLP, 200 Aldersgate, London EC1A 4HD (GB).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) Title: CLEAN AIR APPARATUS

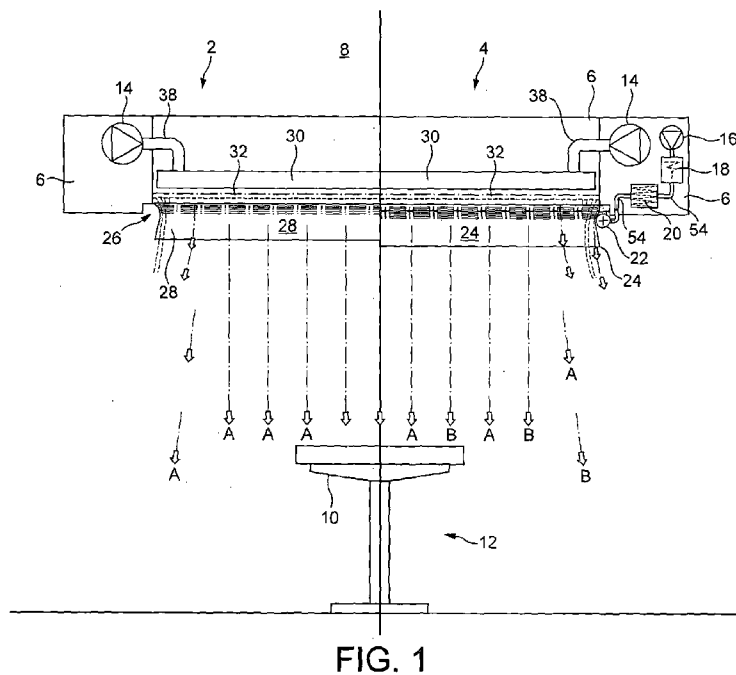

(57) Abstract: A clean air apparatus comprises clean air means for producing a flow of clean air and for discharging the clean air from an outlet and towards a target clean area. The apparatus comprises a Coanda effect device disposed at least adjacent the clean air means, which is arranged, in use, to induce a Coanda effect upon the flow of clean air. The apparatus comprises guide means for guiding the clean air towards a target clean area in the form of an air curtain.