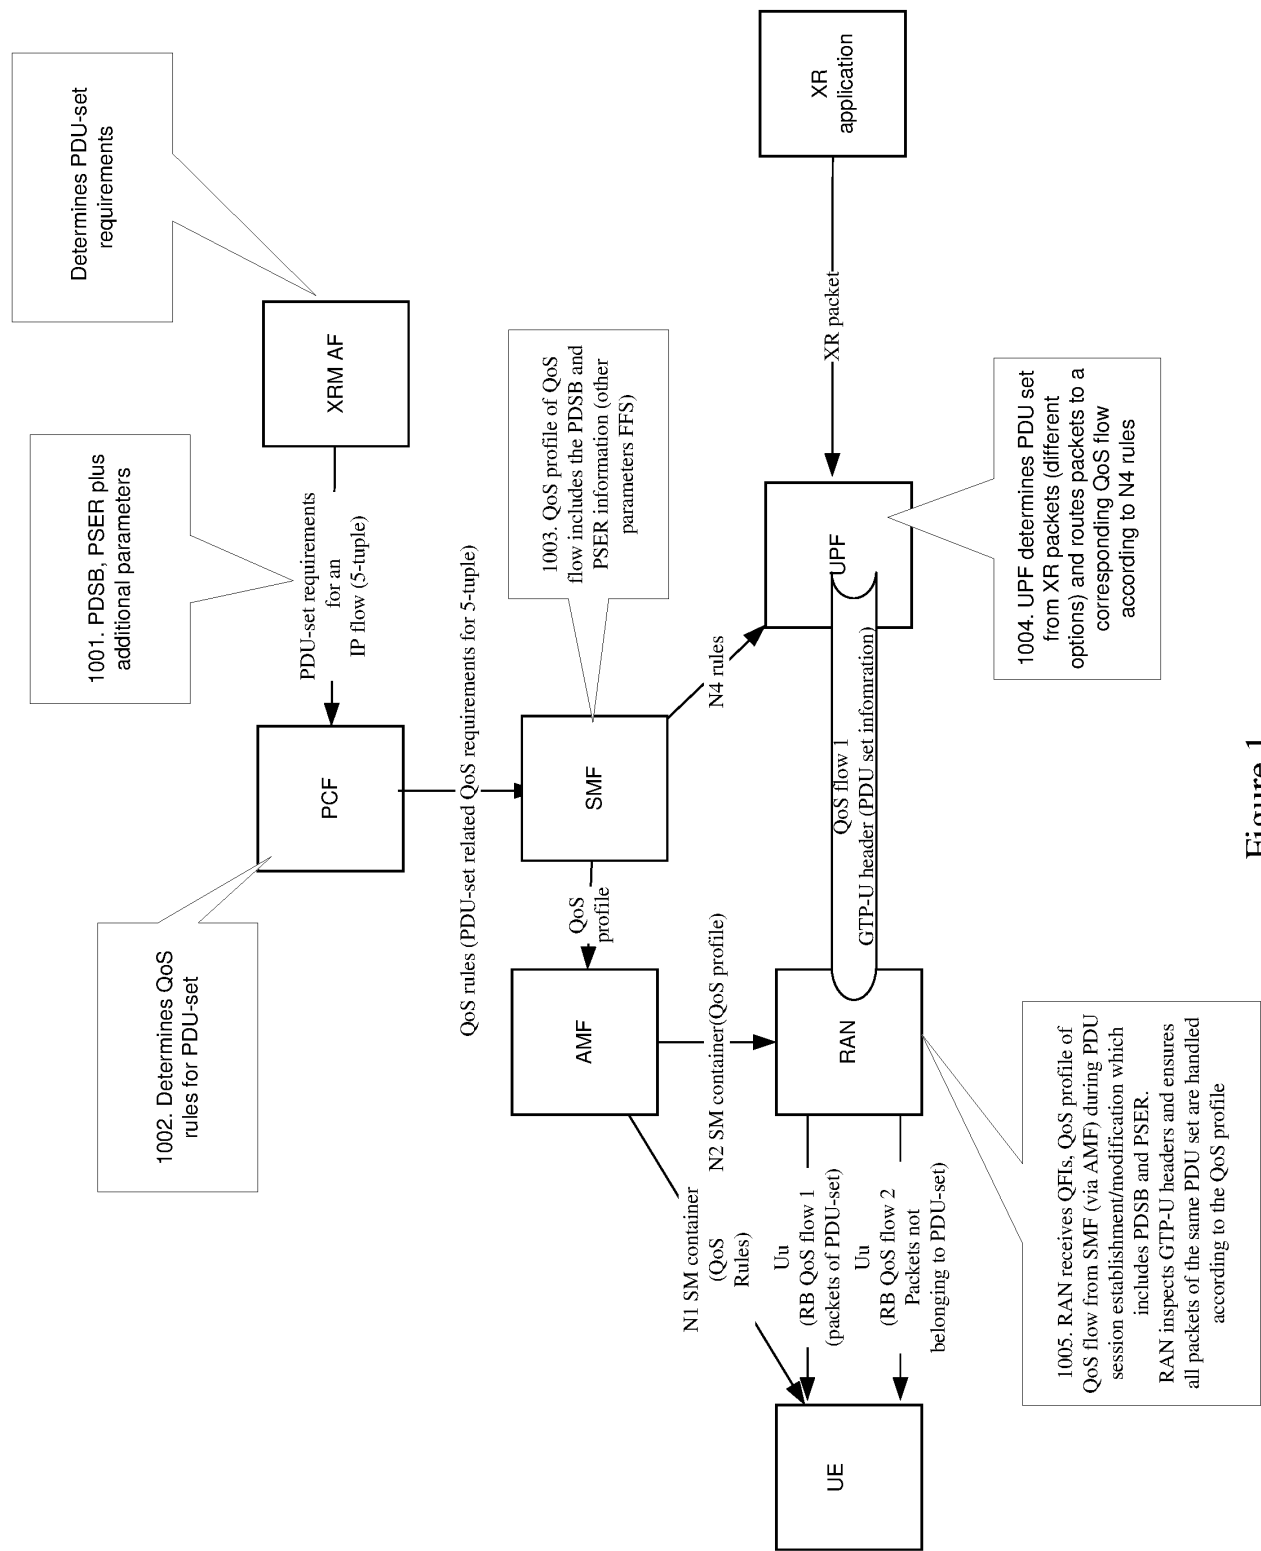




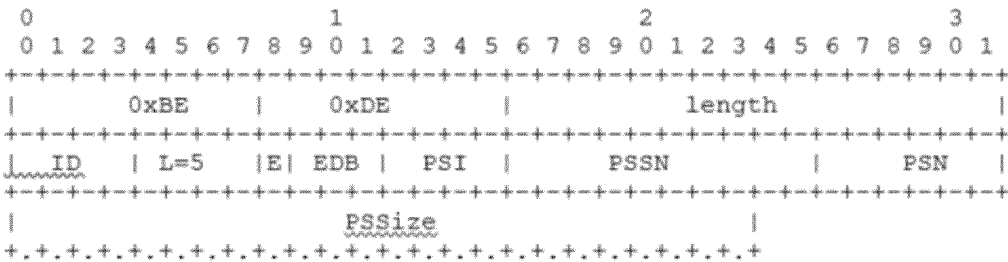


Figure 2

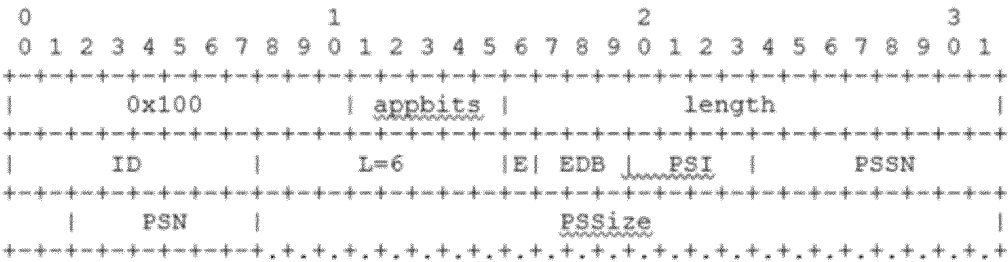


Figure 3

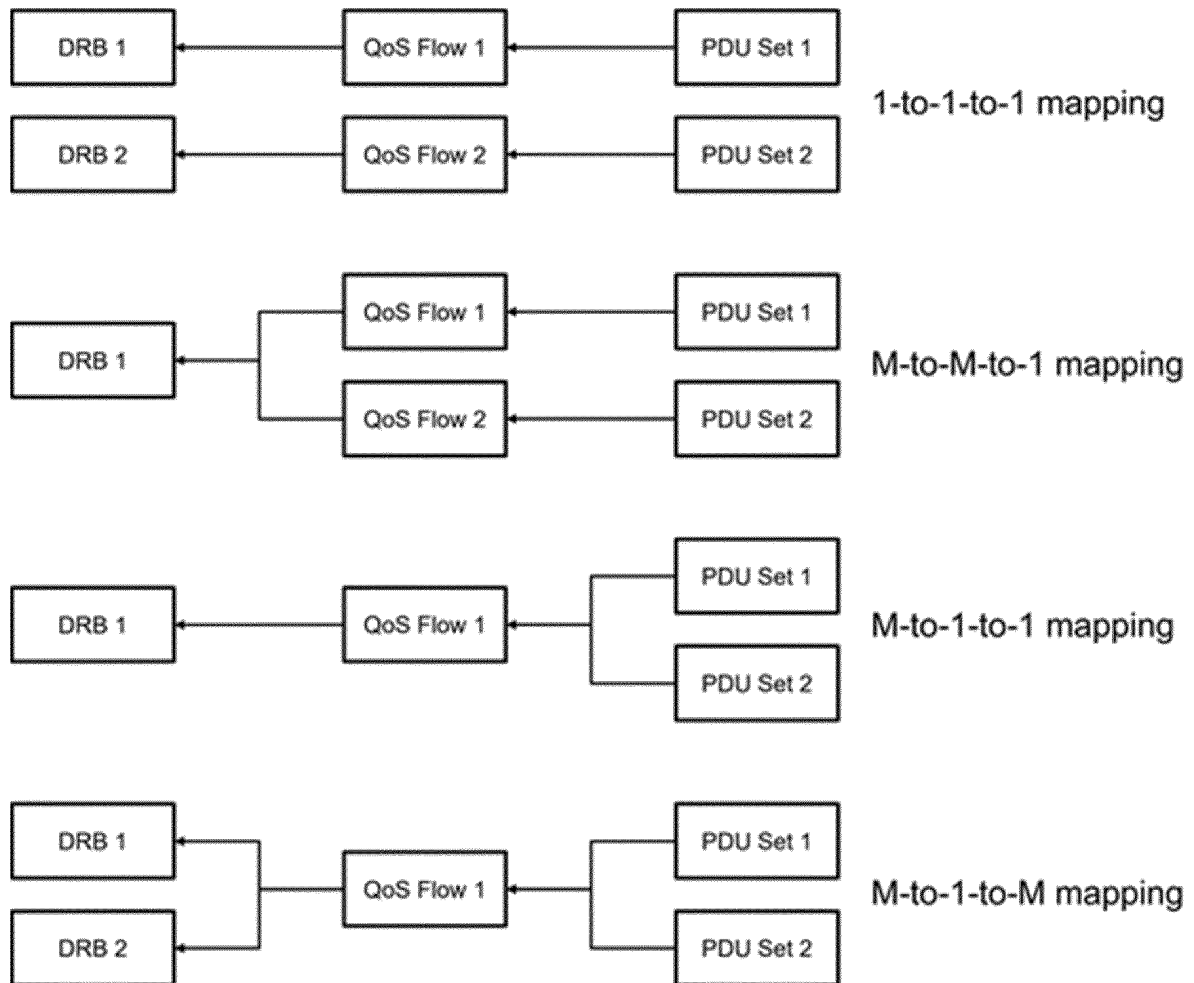


Figure 4

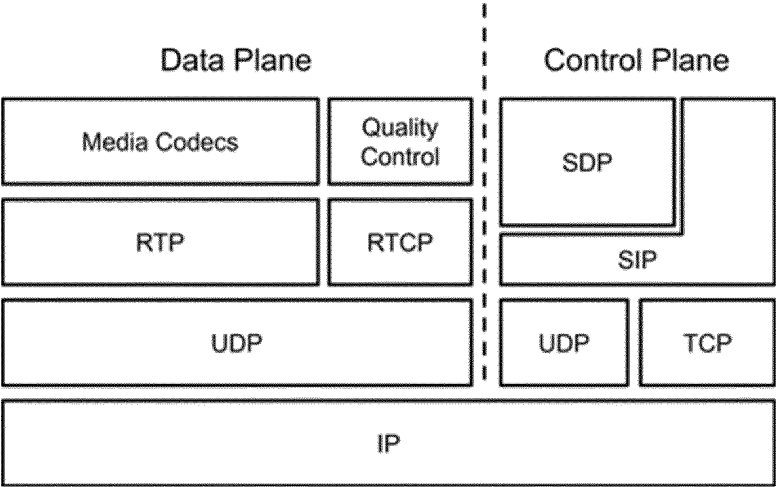


Figure 5

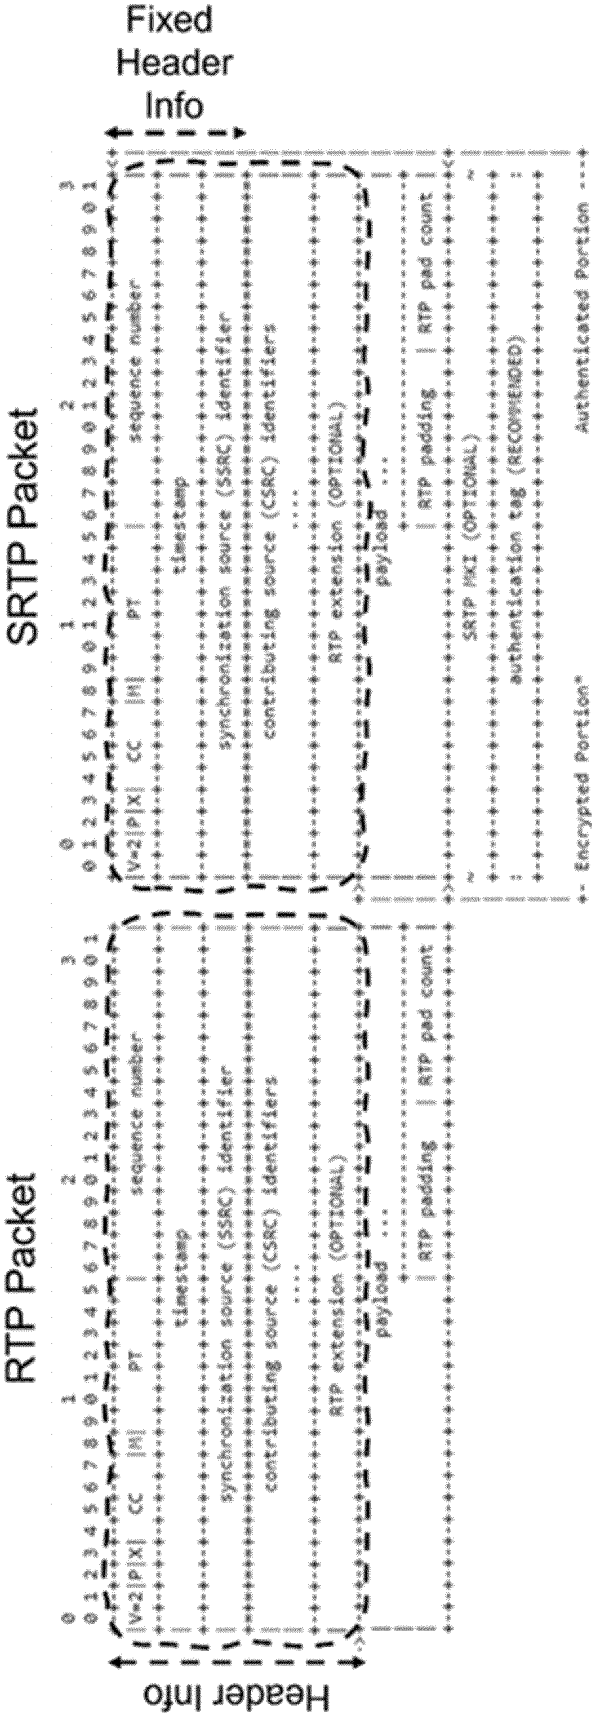


Figure 6

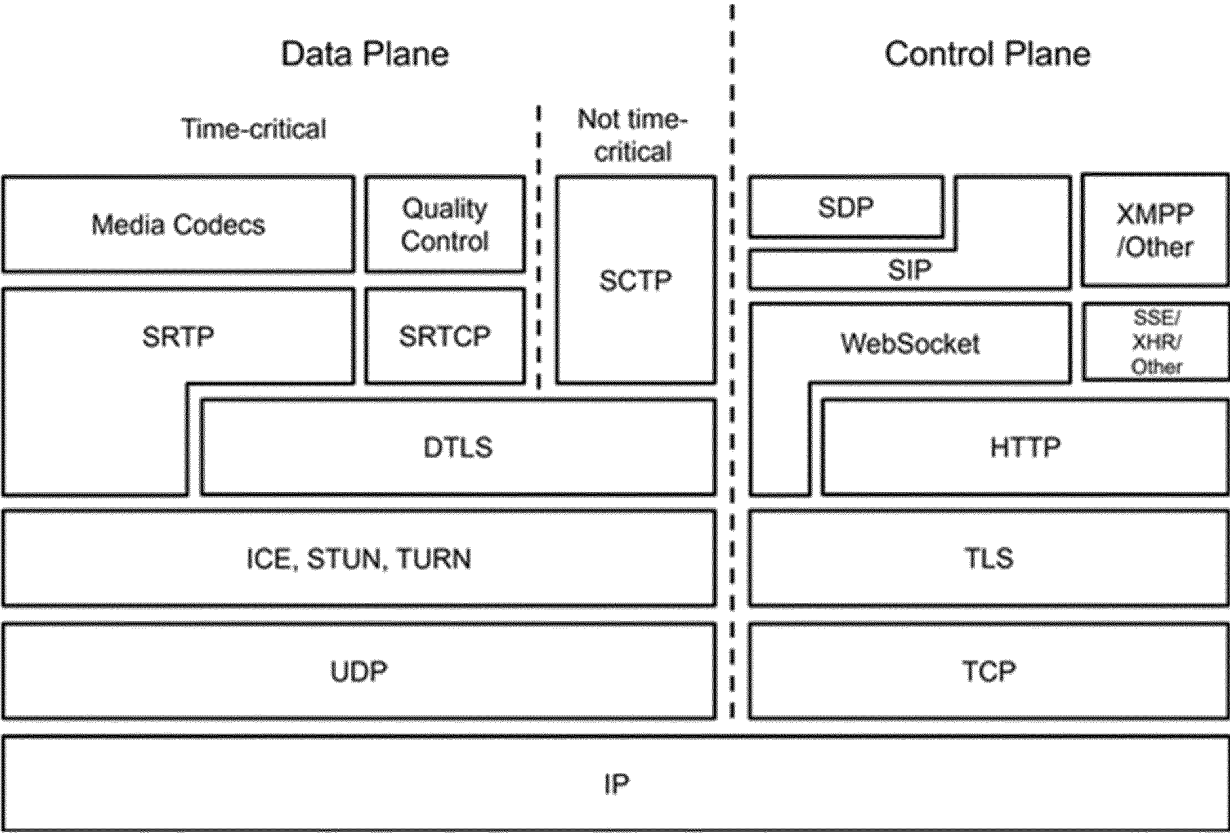


Figure 7

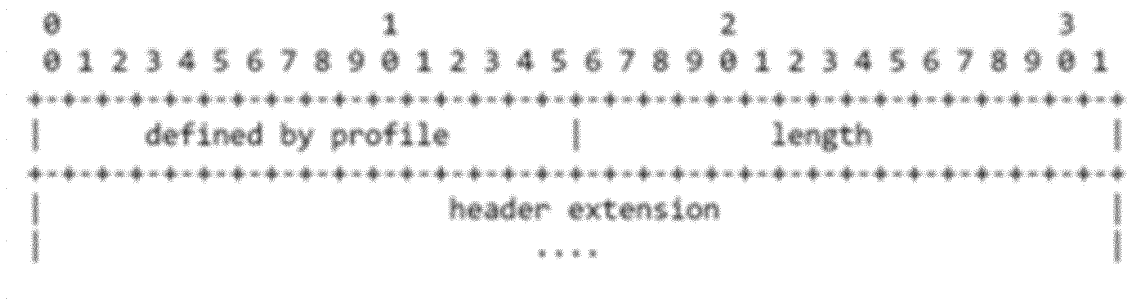


Figure 8

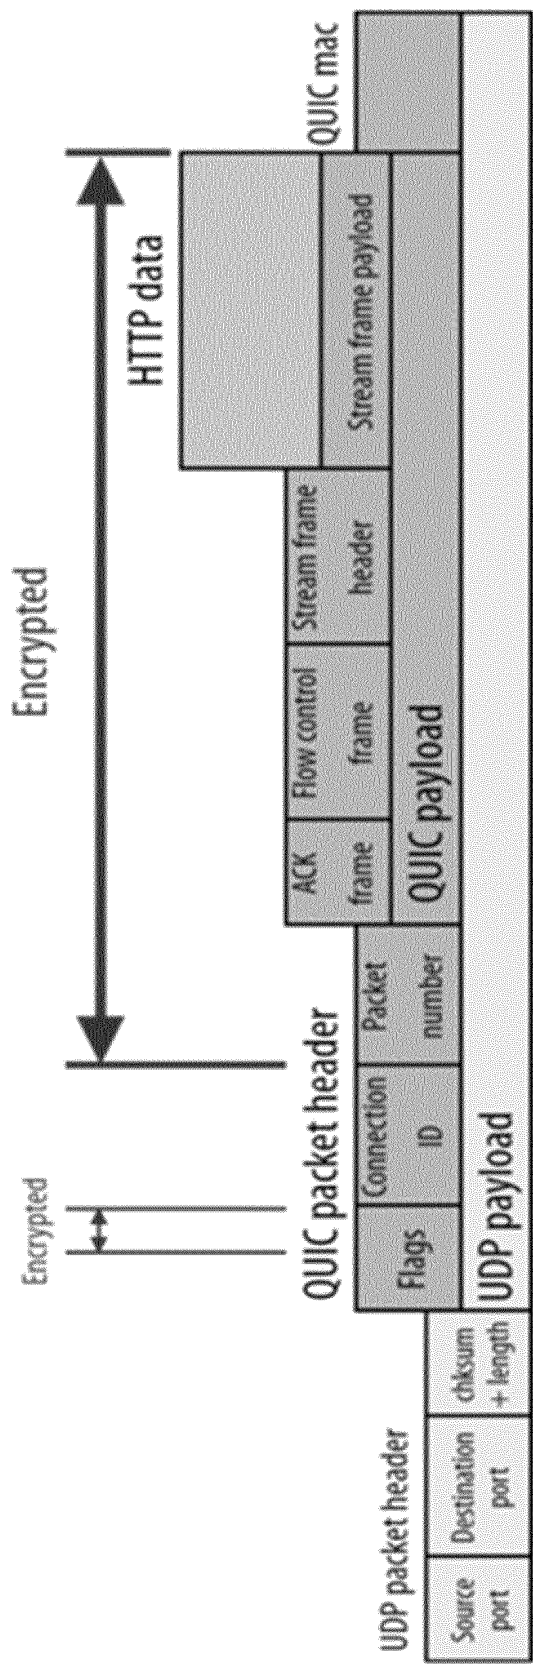


Figure 9

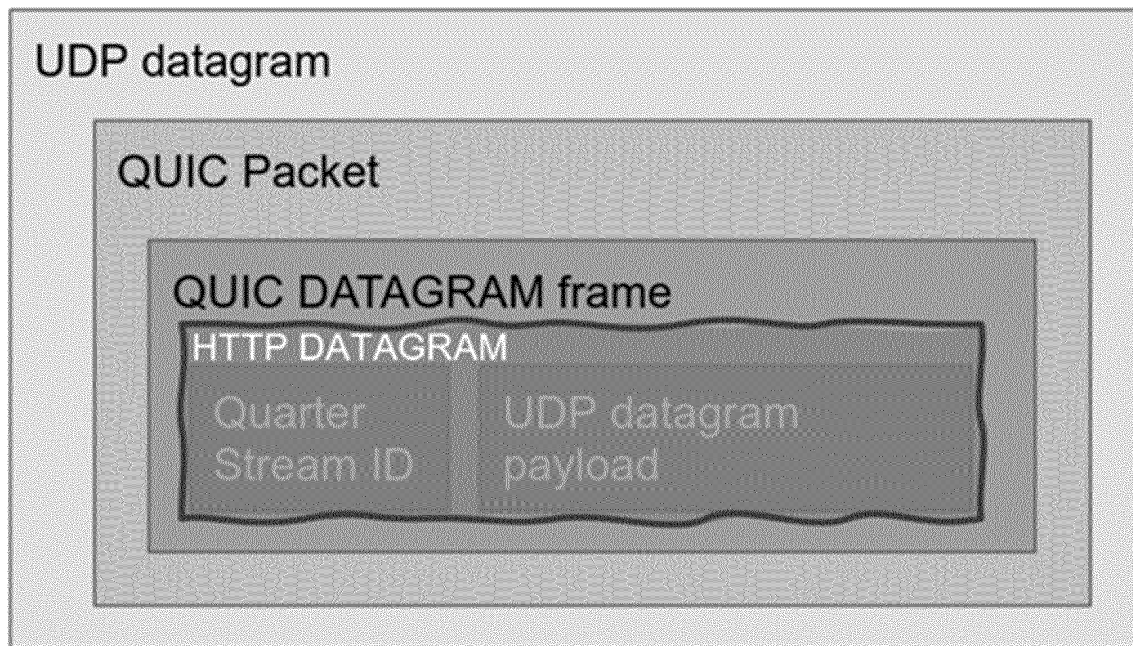


Figure 10

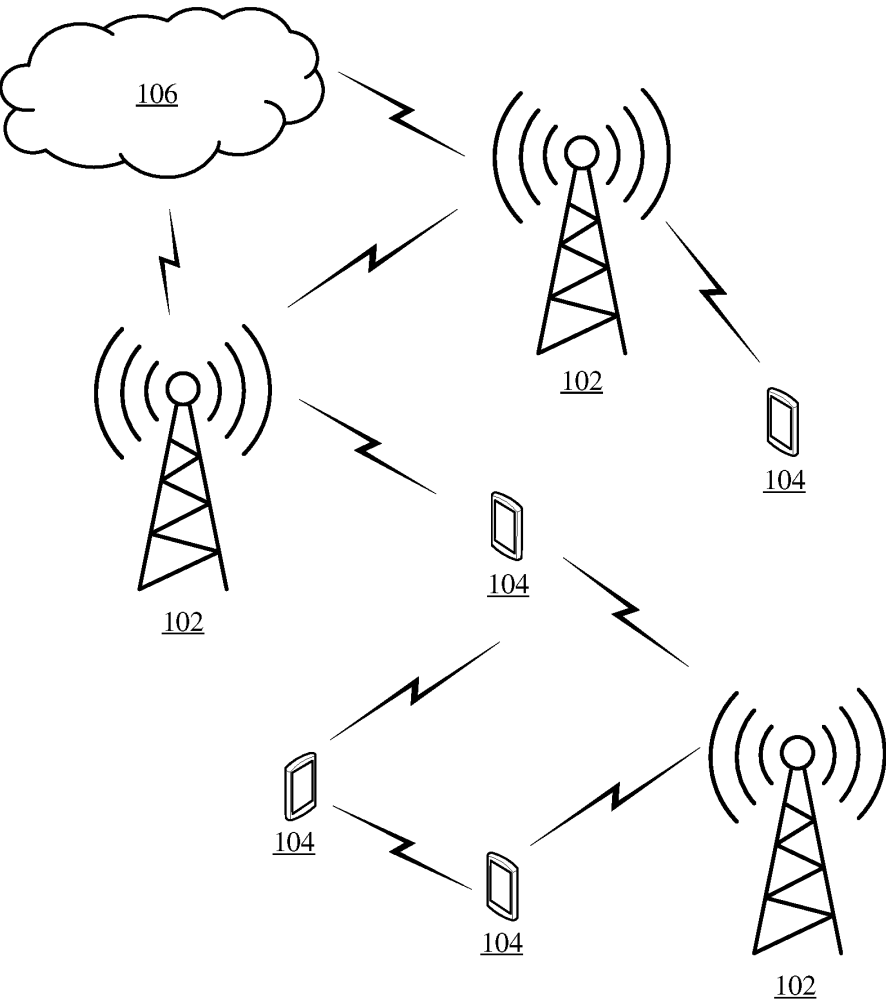


Figure 11

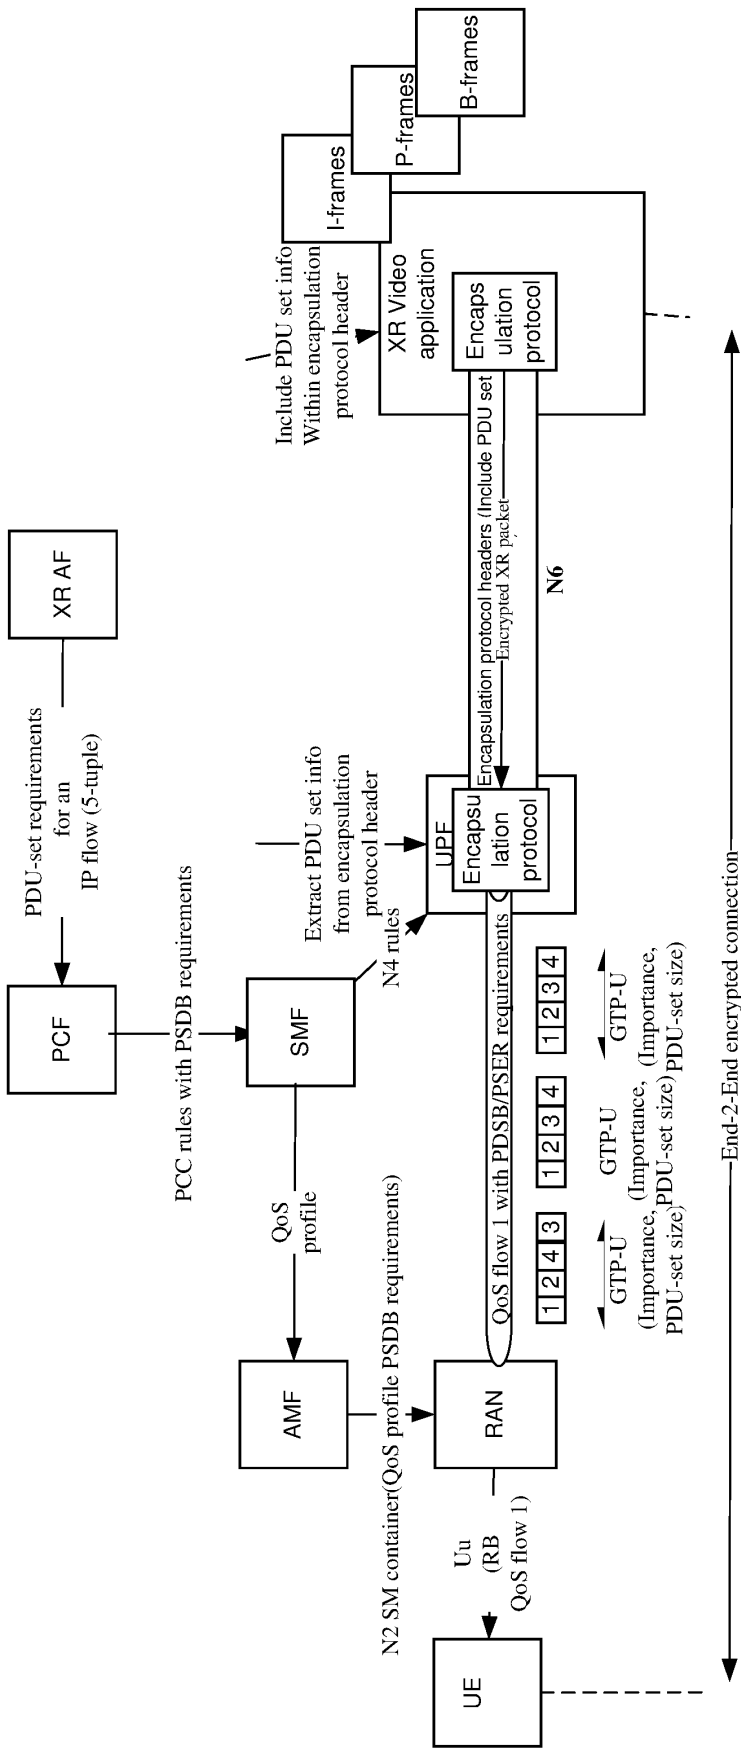


Figure 12

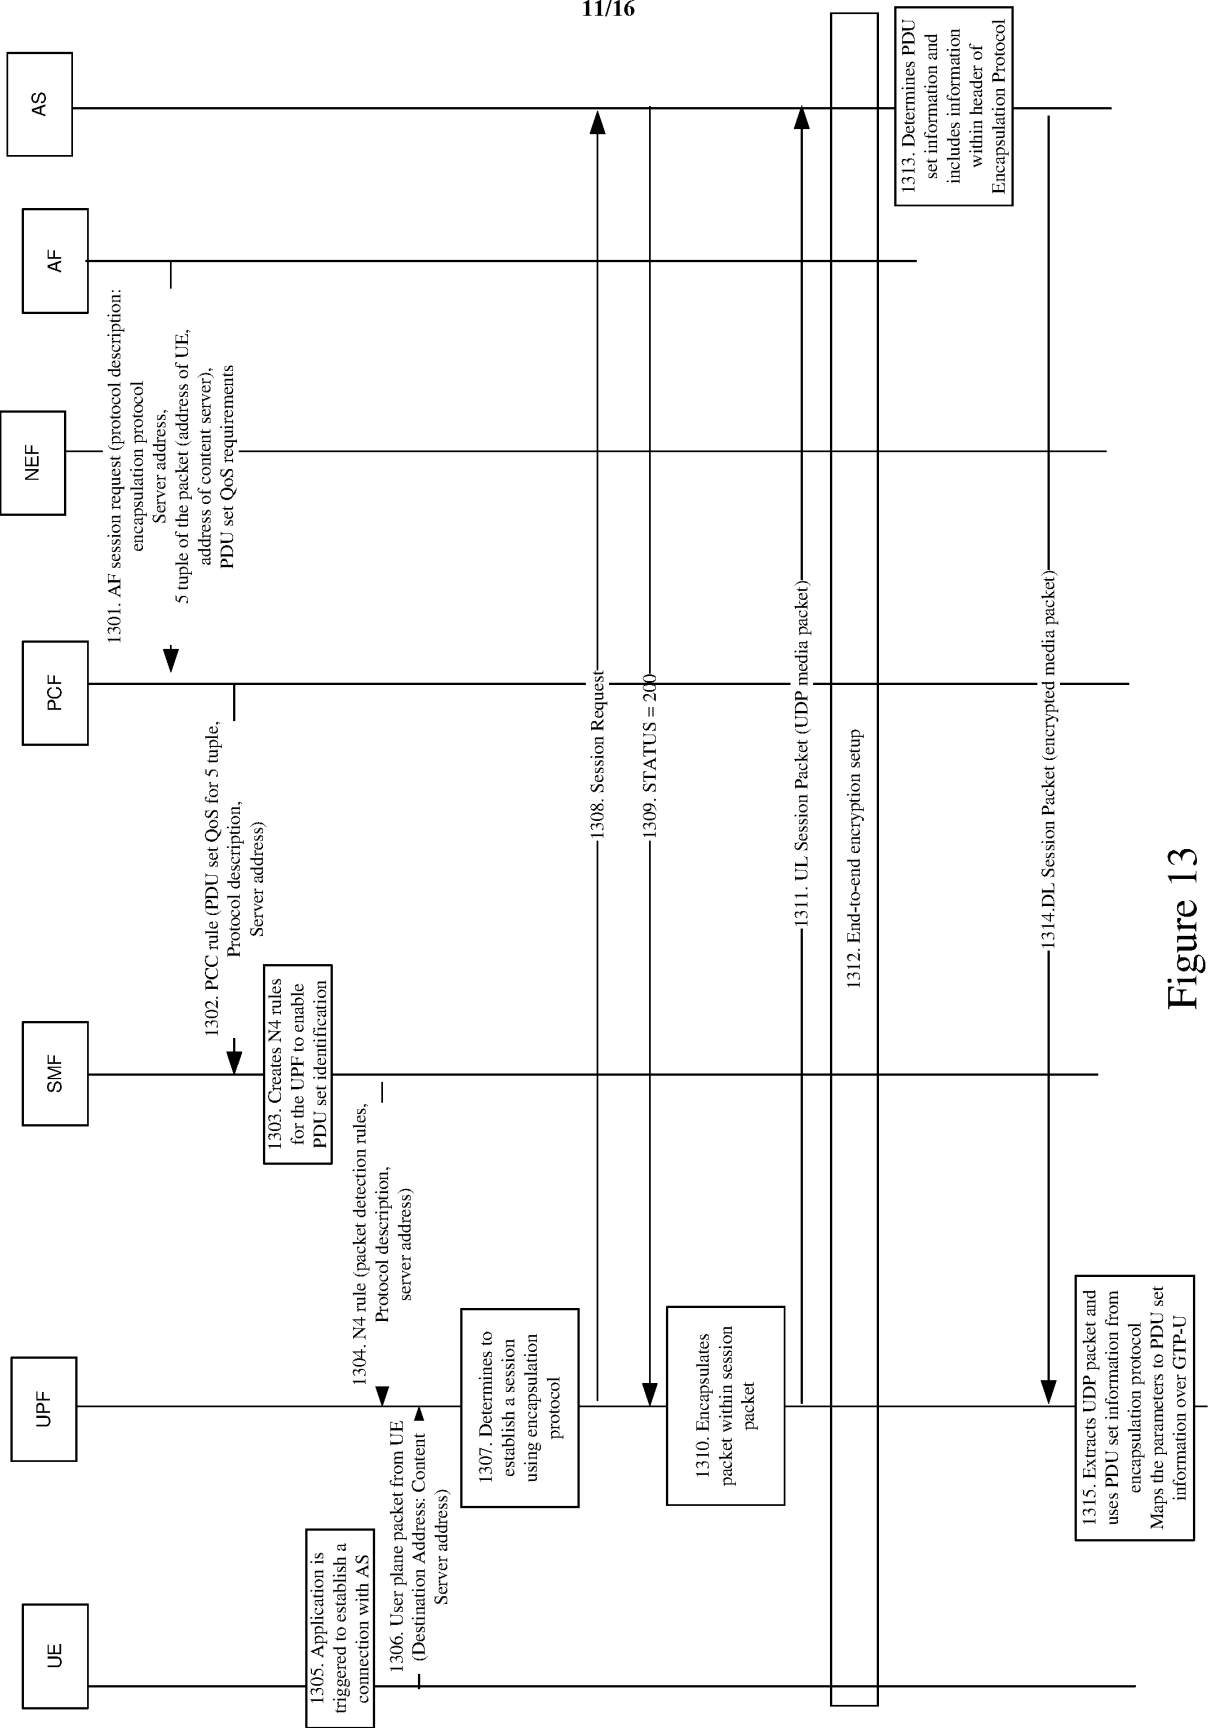


Figure 13

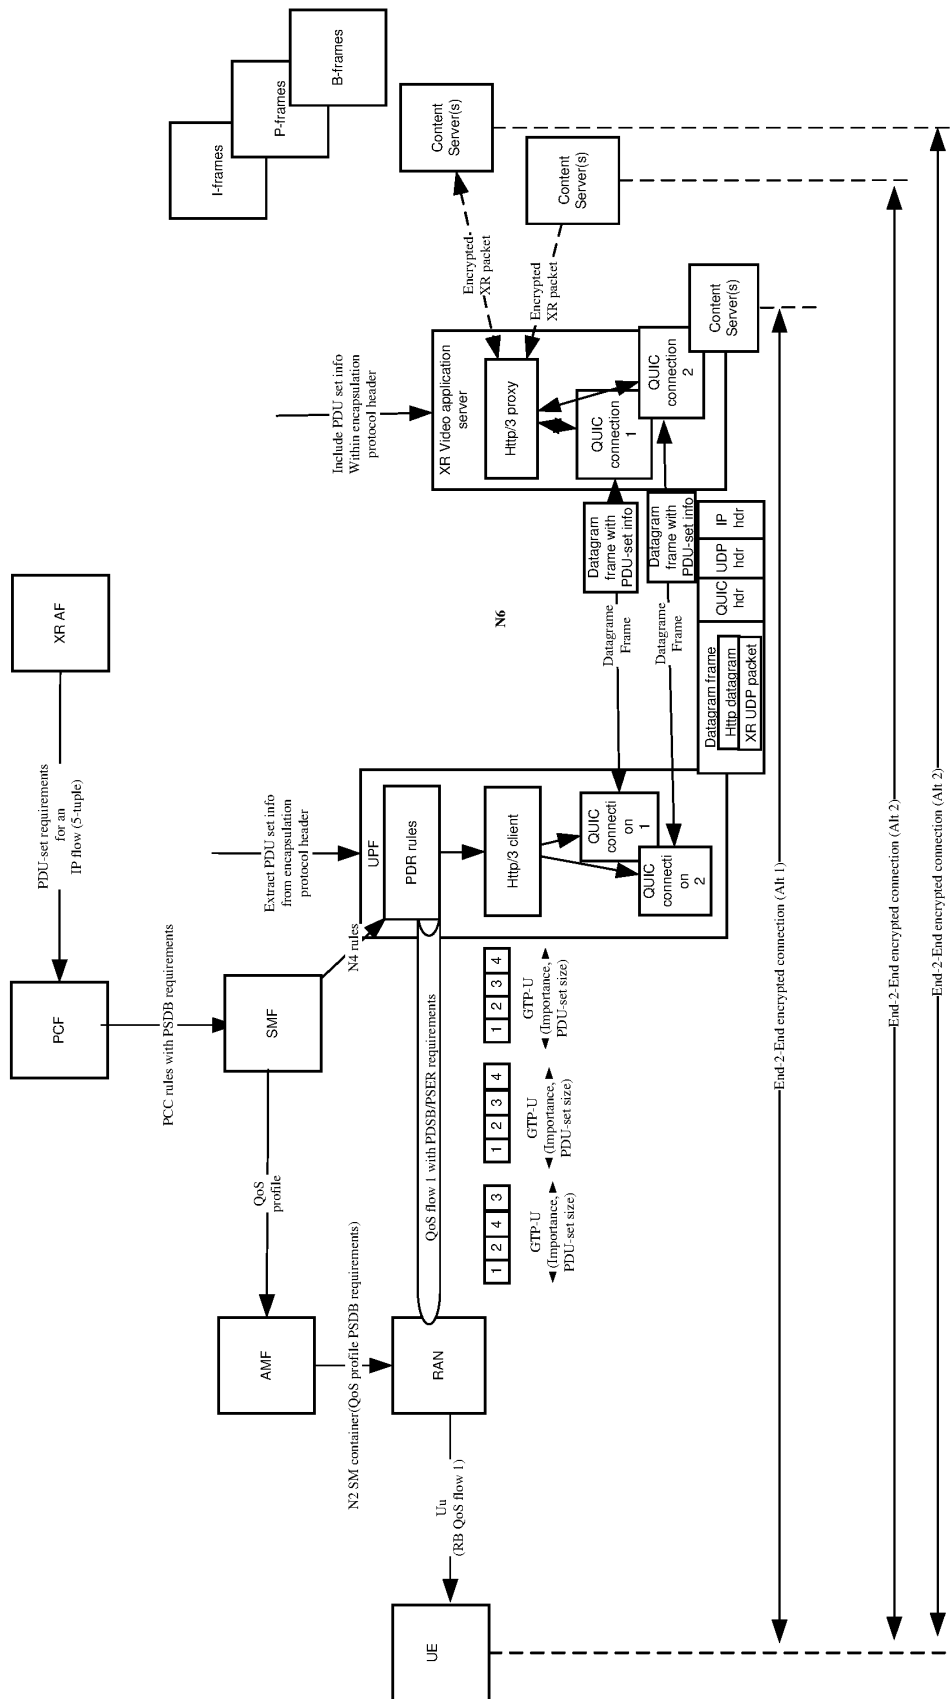


Figure 14

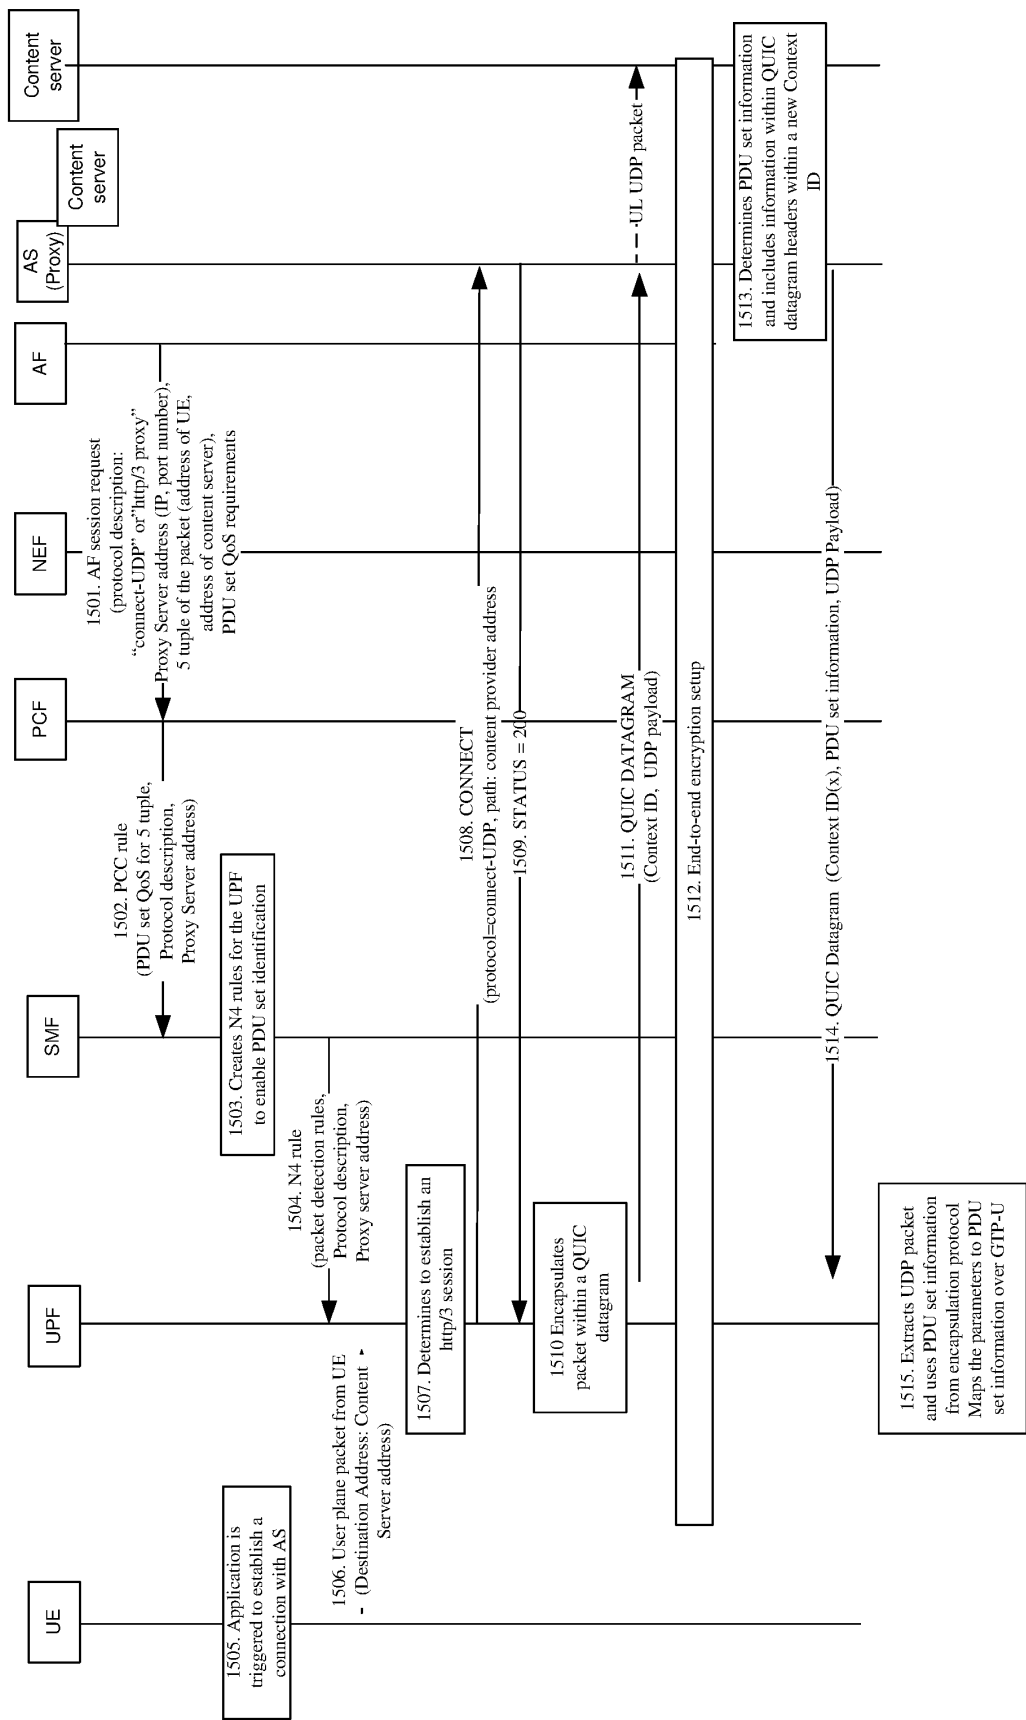


Figure 15

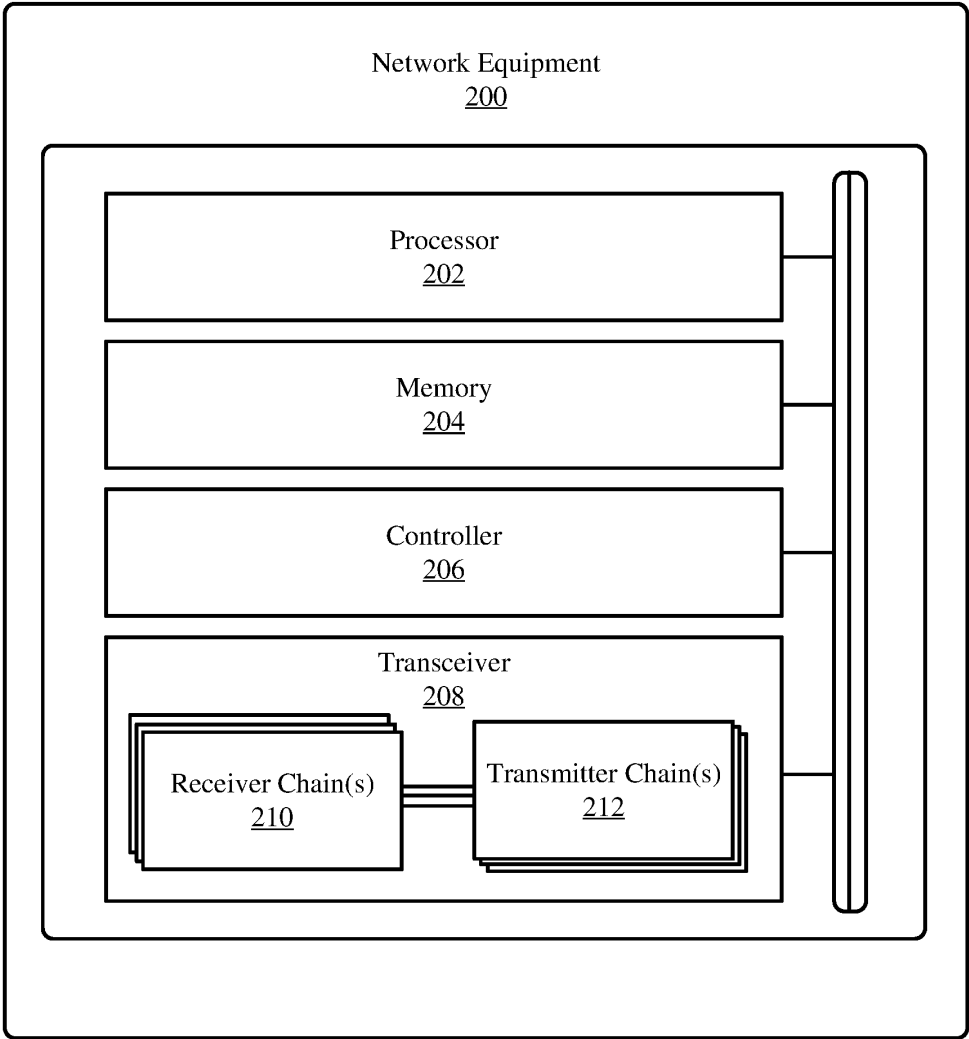


Figure 16

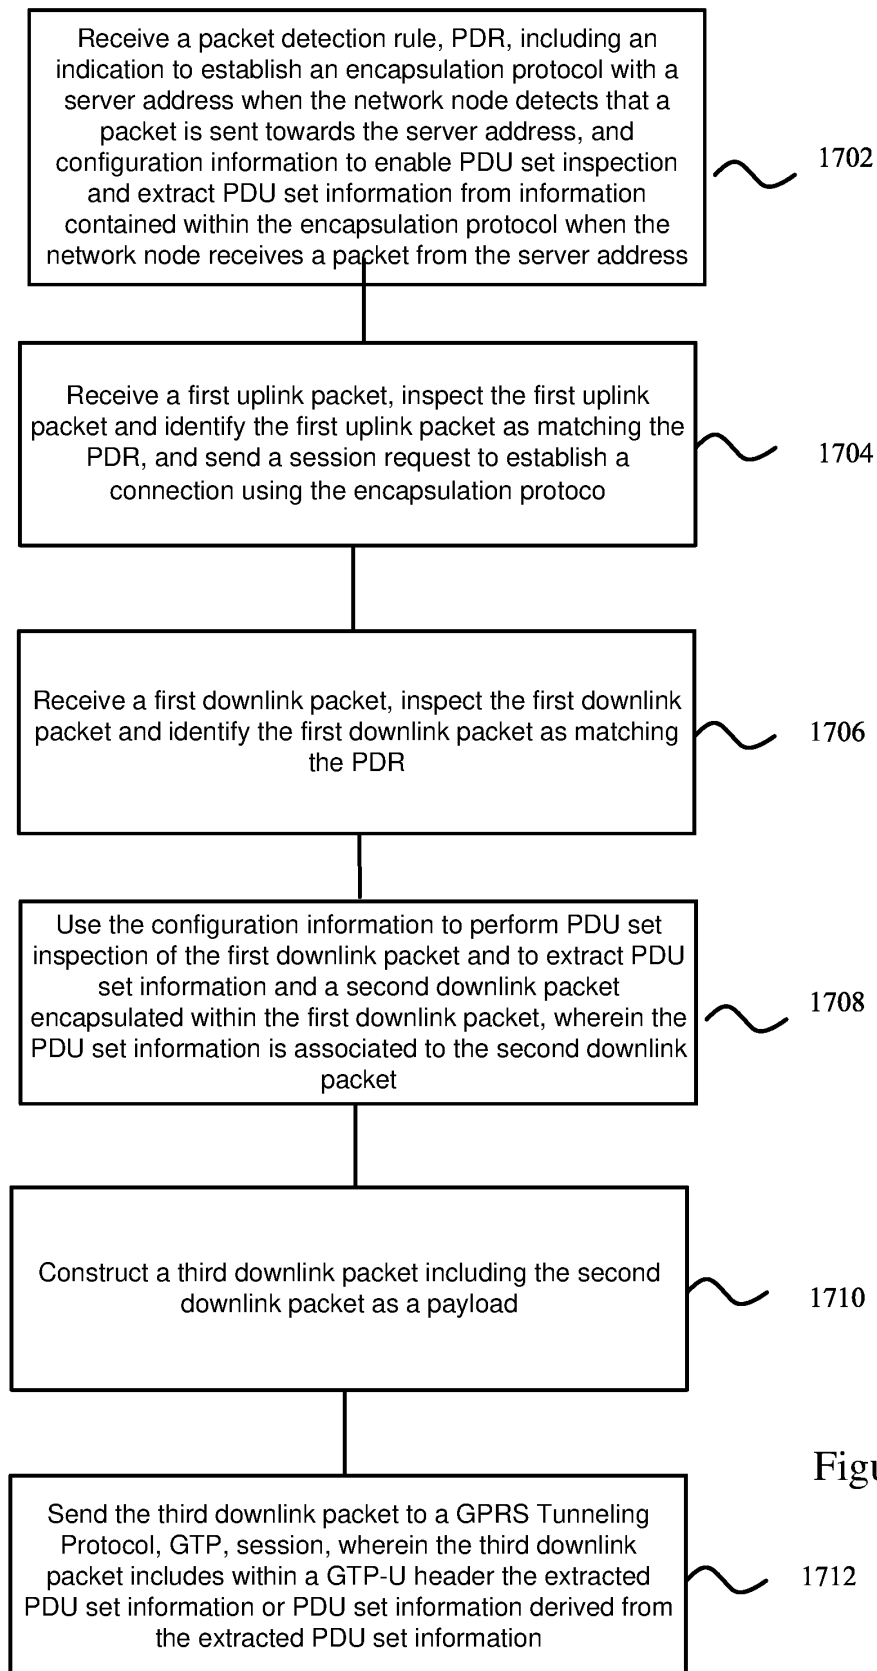


Figure 17

Sending, to a second network node, a packet detection rule, PDR, including an indication to establish an encapsulation protocol with a server address when the second network node detects that a packet is sent towards the server address, and configuration information to enable PDU set inspection and extract PDU set information from information contained within the encapsulation protocol when the network node receives a packet from the server address



1802

Figure 18