

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 December 2008 (04.12.2008)

PCT

(10) International Publication Number
WO 2008/147217 A3

(51) International Patent Classification:

E21B 47/10 (2006.01)

(21) International Application Number:

PCT/NO2008/000192

(22) International Filing Date: 30 May 2008 (30.05.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

20072799 1 June 2007 (01.06.2007) NO

(71) Applicant (for all designated States except US): **FMC KONGSBERG SUBSEA AS** [NO/NO]; P.O. Box 1012, N-3601 Kongsberg (NO).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **INDERBERG, Olav** [NO/NO]; Veungdalsveien 99, N-3615 Kongsberg (NO). **JOHANSEN, John, A.** [NO/NO]; Helene Sembs vei 27, N-3610 Kongsberg (NO).

(74) Agents: **ONSAGERS AS** et al.; P.O. Box 6963 St. Olavs plass, N-0130 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CONTROL SYSTEM

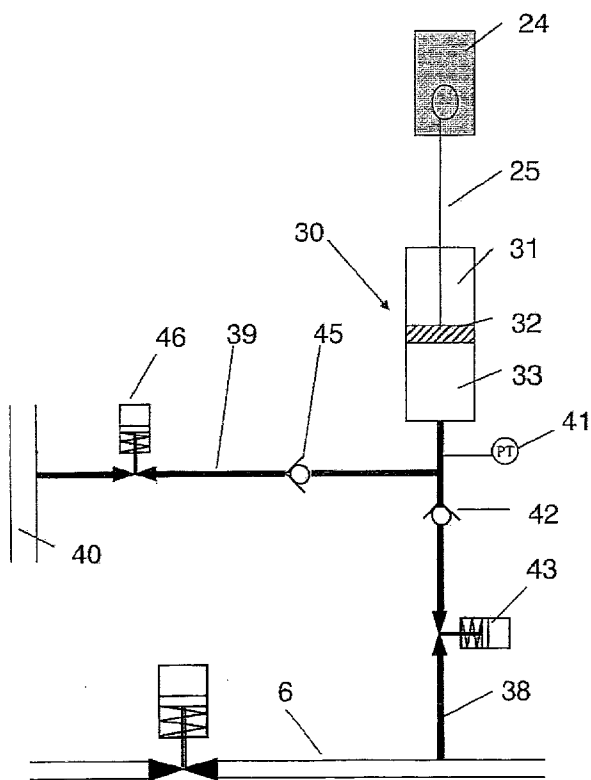


Fig. 2

(57) Abstract: The present invention regards a method for relieving a pressure within a first cavity by moving fluid from a first cavity (40; 6) with a lower pressure, for instance an annulus, to a second cavity (6; 40) with a higher pressure, for instance a flow line, in a subsea facility where the method comprises the steps of allowing fluid within the first cavity (40; 6) to flow through a first line (39; 38) to a transfer accumulator (30), then pressurizing the fluid within the transfer accumulator (30) by a piston arrangement (32) and transferring the fluid from the transfer accumulator (30) into the second cavity (6; 40). The invention also comprises a device for performing the method.

WO 2008/147217 A3



Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:

19 March 2009