

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
25 May 2001 (25.05.2001)

PCT

(10) International Publication Number
WO 01/37379 A1

- (51) International Patent Classification⁷: **H01R 12/20** (74) Agent: **DE VRIES, Johannes, Hendrik, Fokke**; De Vries & Metman B.V., Overschiestraat 180, NL-1062 XK Amsterdam (NL).
- (21) International Application Number: **PCT/EP00/11286**
- (22) International Filing Date:
13 November 2000 (13.11.2000) (81) Designated States (national): **JP, SG.**
- (25) Filing Language: **English** (84) Designated States (regional): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).**
- (26) Publication Language: **English**
- (30) Priority Data:
1013575 15 November 1999 (15.11.1999) NL
- (71) Applicant: **F.C.I-FRAMATOME CONNECTORS INTERNATIONAL [FR/FR]**; Tour Framatome, La Défense 6, F-92084 Paris la Défense Cedex (FR).
- (72) Inventor: **LOMAN, Martinus, Hendricus**; Vlasgaard 6, NL-5345 AV Oss (NL).
- Published:**
— With international search report.
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **CONNECTOR AND METHOD FOR MANUFACTURING THE SAME**

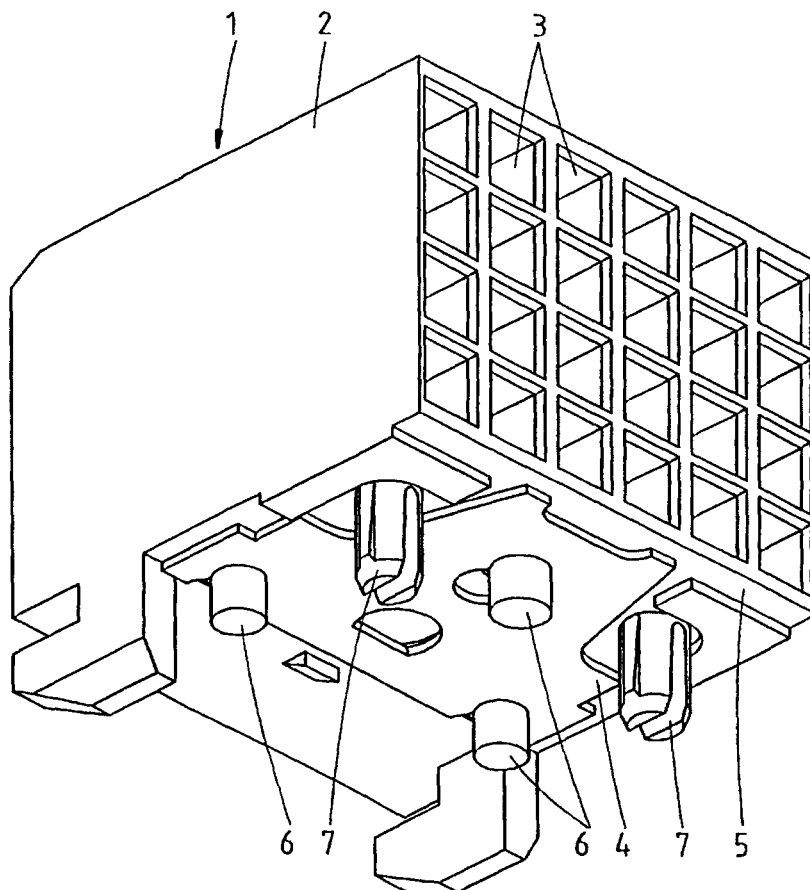

(57) Abstract: A connector comprises a housing of insulating material and a metal plate attached to a surface of the housing. This surface is provided with a plurality of pegs of insulating material and the metal plate is provided with a plurality of fixation holes co-operating with the pegs to attach the metal plate to the housing. The passage of each fixation hole of the plate is smaller than the cross-section of the corresponding peg of the housing. The plate is further provided with an entrance hole for each fixation hole. This entrance hole debouches into the fixation hole and has a passage larger than the cross-section of the corresponding peg. The connector is manufactured in that the metal plate is placed on said surface with the entrance holes receiving the pegs with play, whereafter the metal plate is moved along the surface such that the pegs are forced into the fixation holes.

WO 01/37379 A1