



- (51) **International Patent Classification:**
E21B 33/13 (2006.01) *E21B 17/042* (2006.01)
E21B 17/02 (2006.01)
- (21) **International Application Number:**
PCT/US2013/054464
- (22) **International Filing Date:**
12 August 2013 (12.08.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 10200 Bellaire Boulevard, Houston, TX 77072 (US).
- (72) **Inventors:** BEISEL, Joe, A.; Rt. 1, Box 95, Duncan, OK 73533 (US). ROGOZINSKI, Nicolas; 1010 Ranchwood Pl., Duncan, OK 73533 (US).
- (74) **Agents:** JORDAN, Carey, C. et al.; McDermott Will & Emery LLP, 500 North Capitol Street, N.W., Washington, DC 20001 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

(54) **Title:** IMPROVED COUPLING FOR A CEMENT HEAD

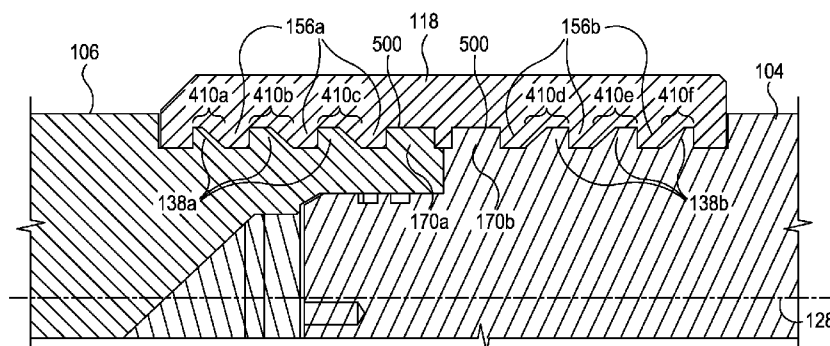


FIG. 12

(57) **Abstract:** Disclosed is an improved coupling for cement heads. One exemplary cement head includes a first module comprising a first end, a first outer surface, and a plurality of first protrusions extending radially outward from the first outer surface, each of the plurality of first protrusions comprising a first profile in which (i) a first engagement surface faces axially away from the first end and (ii) a first support surface forms a first oblique angle relative to an axis; and a bridge configured to engage the plurality of first protrusions.