




[図1]

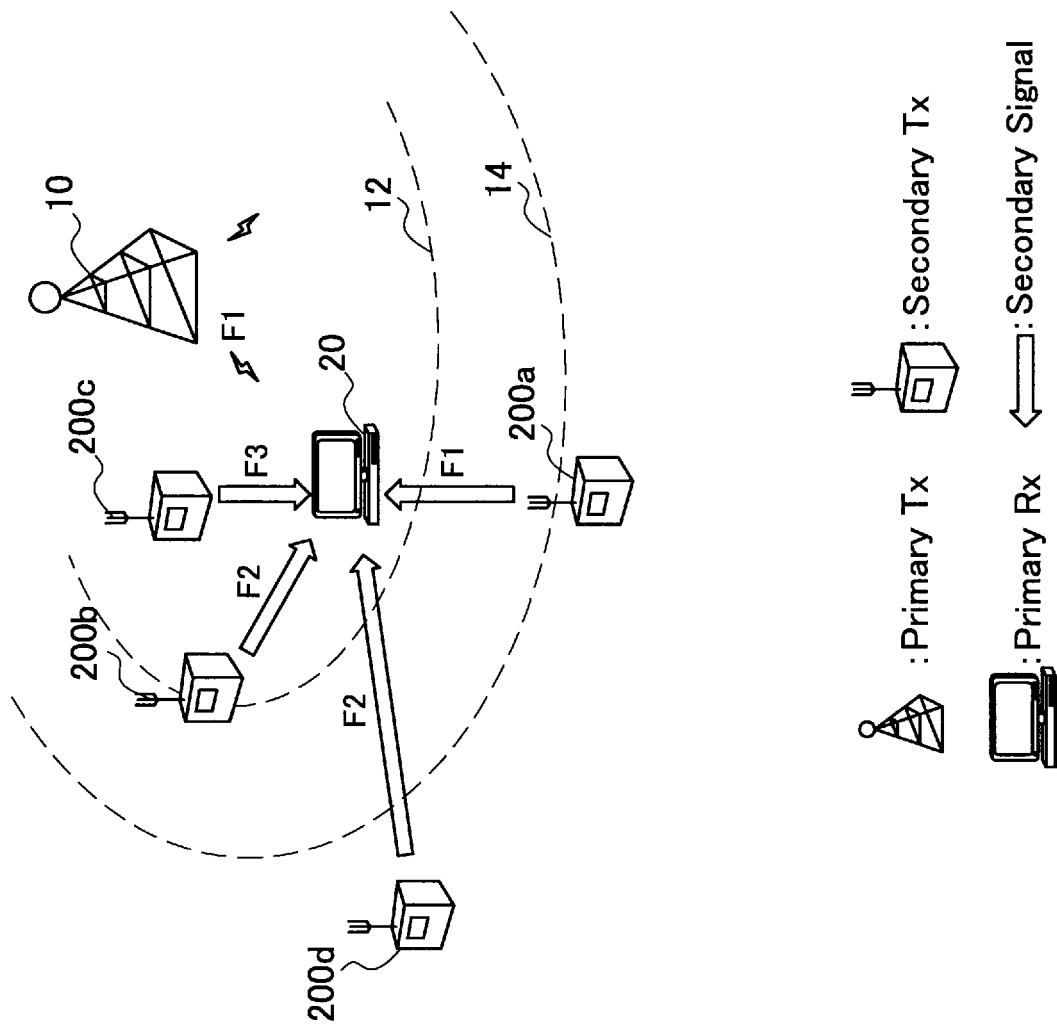


[図2]

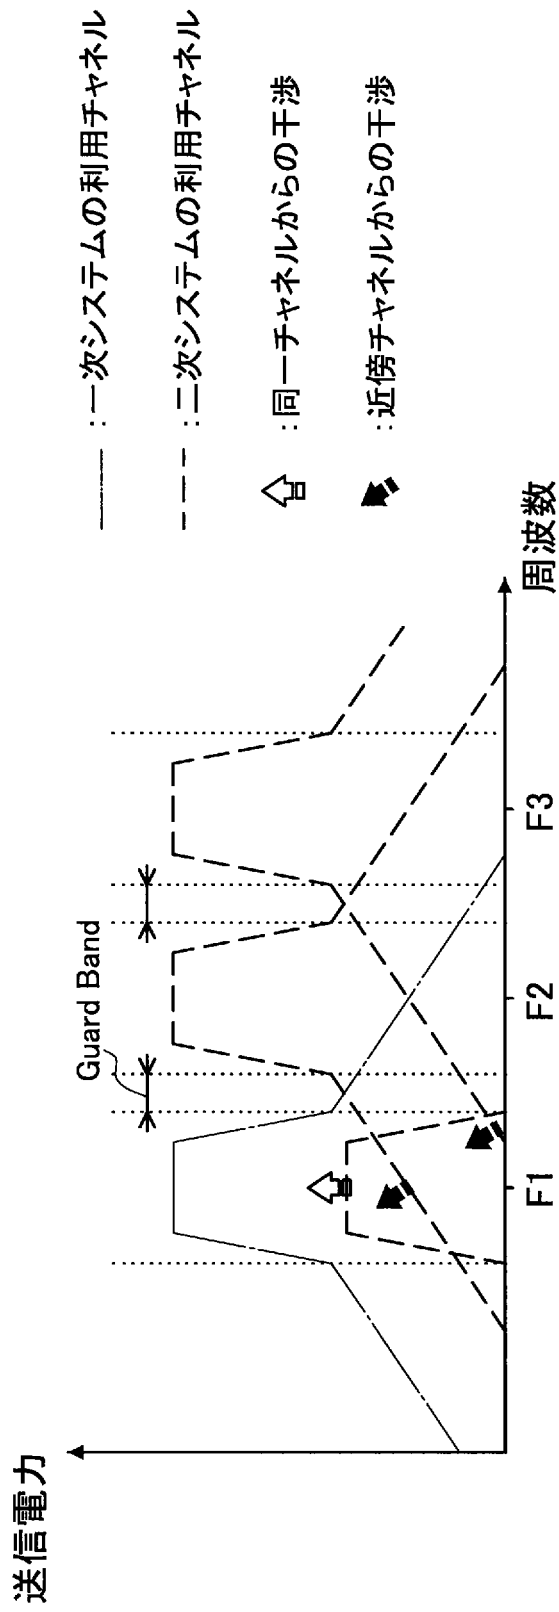


[図3]

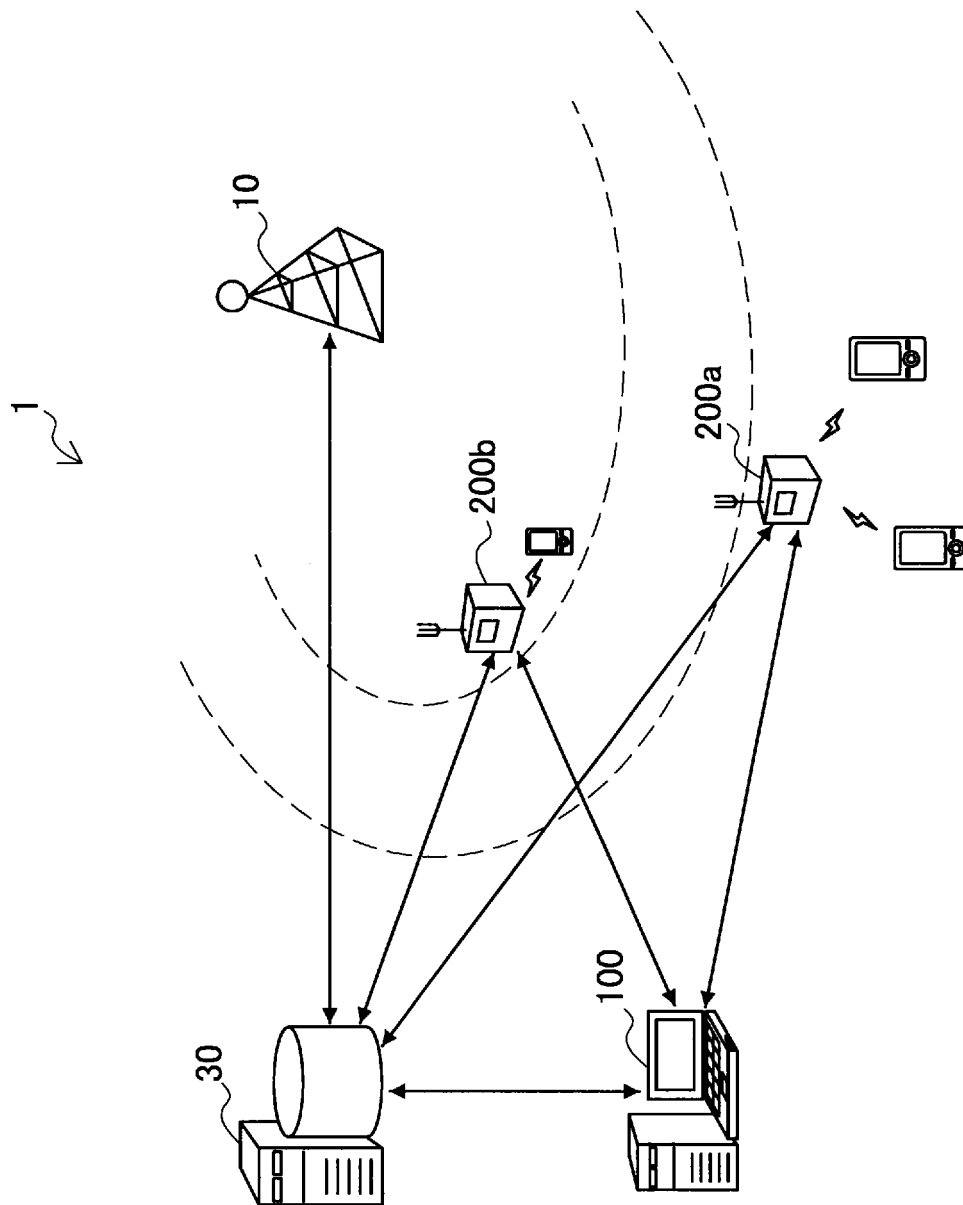


[図4]

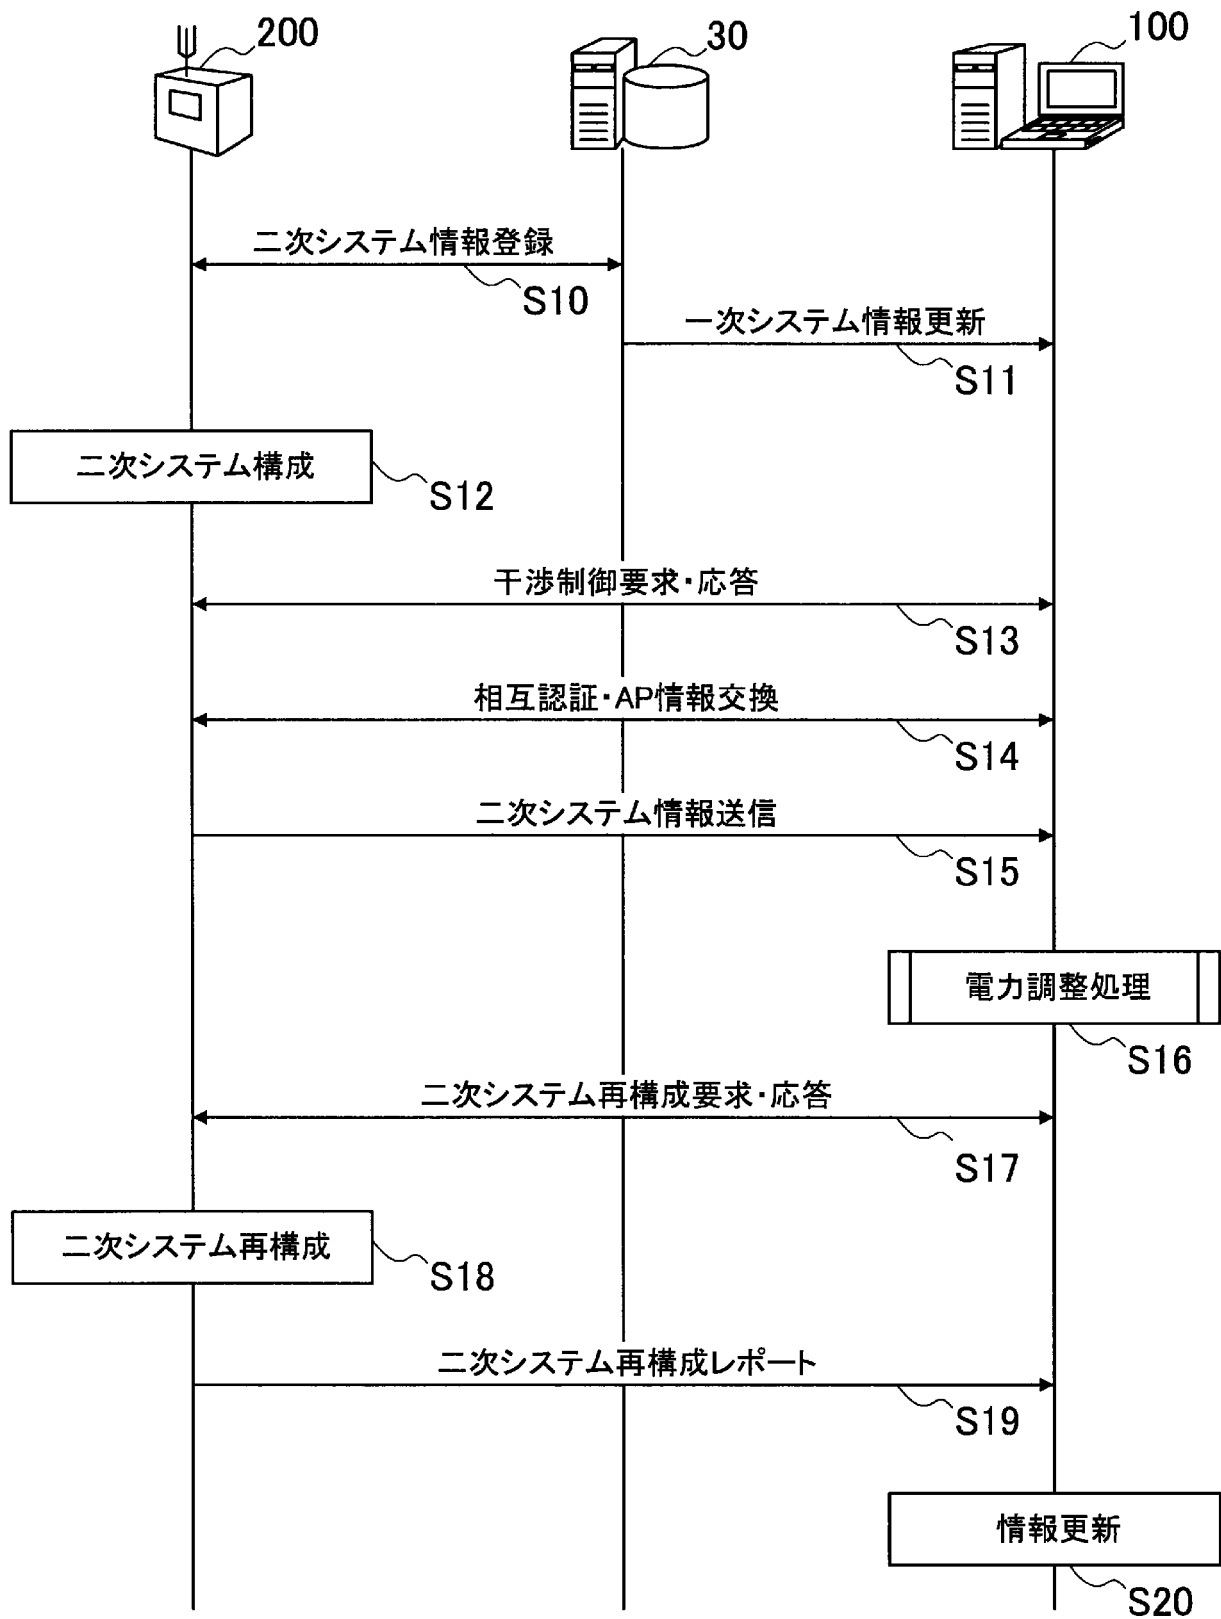


[図5]

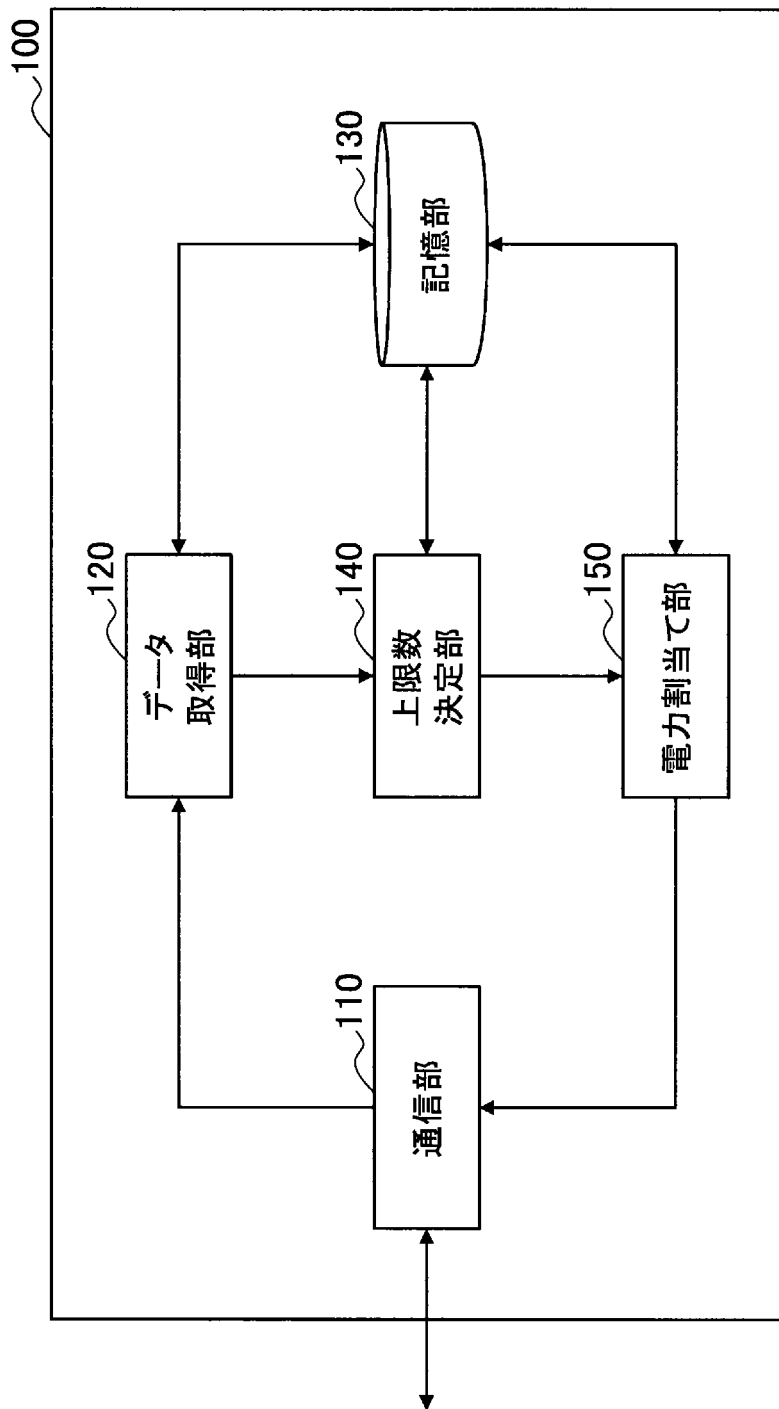


[図6]

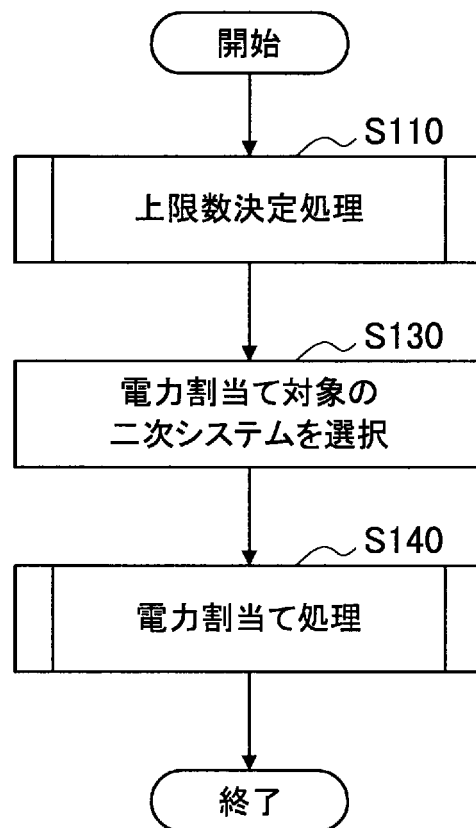


[図7]

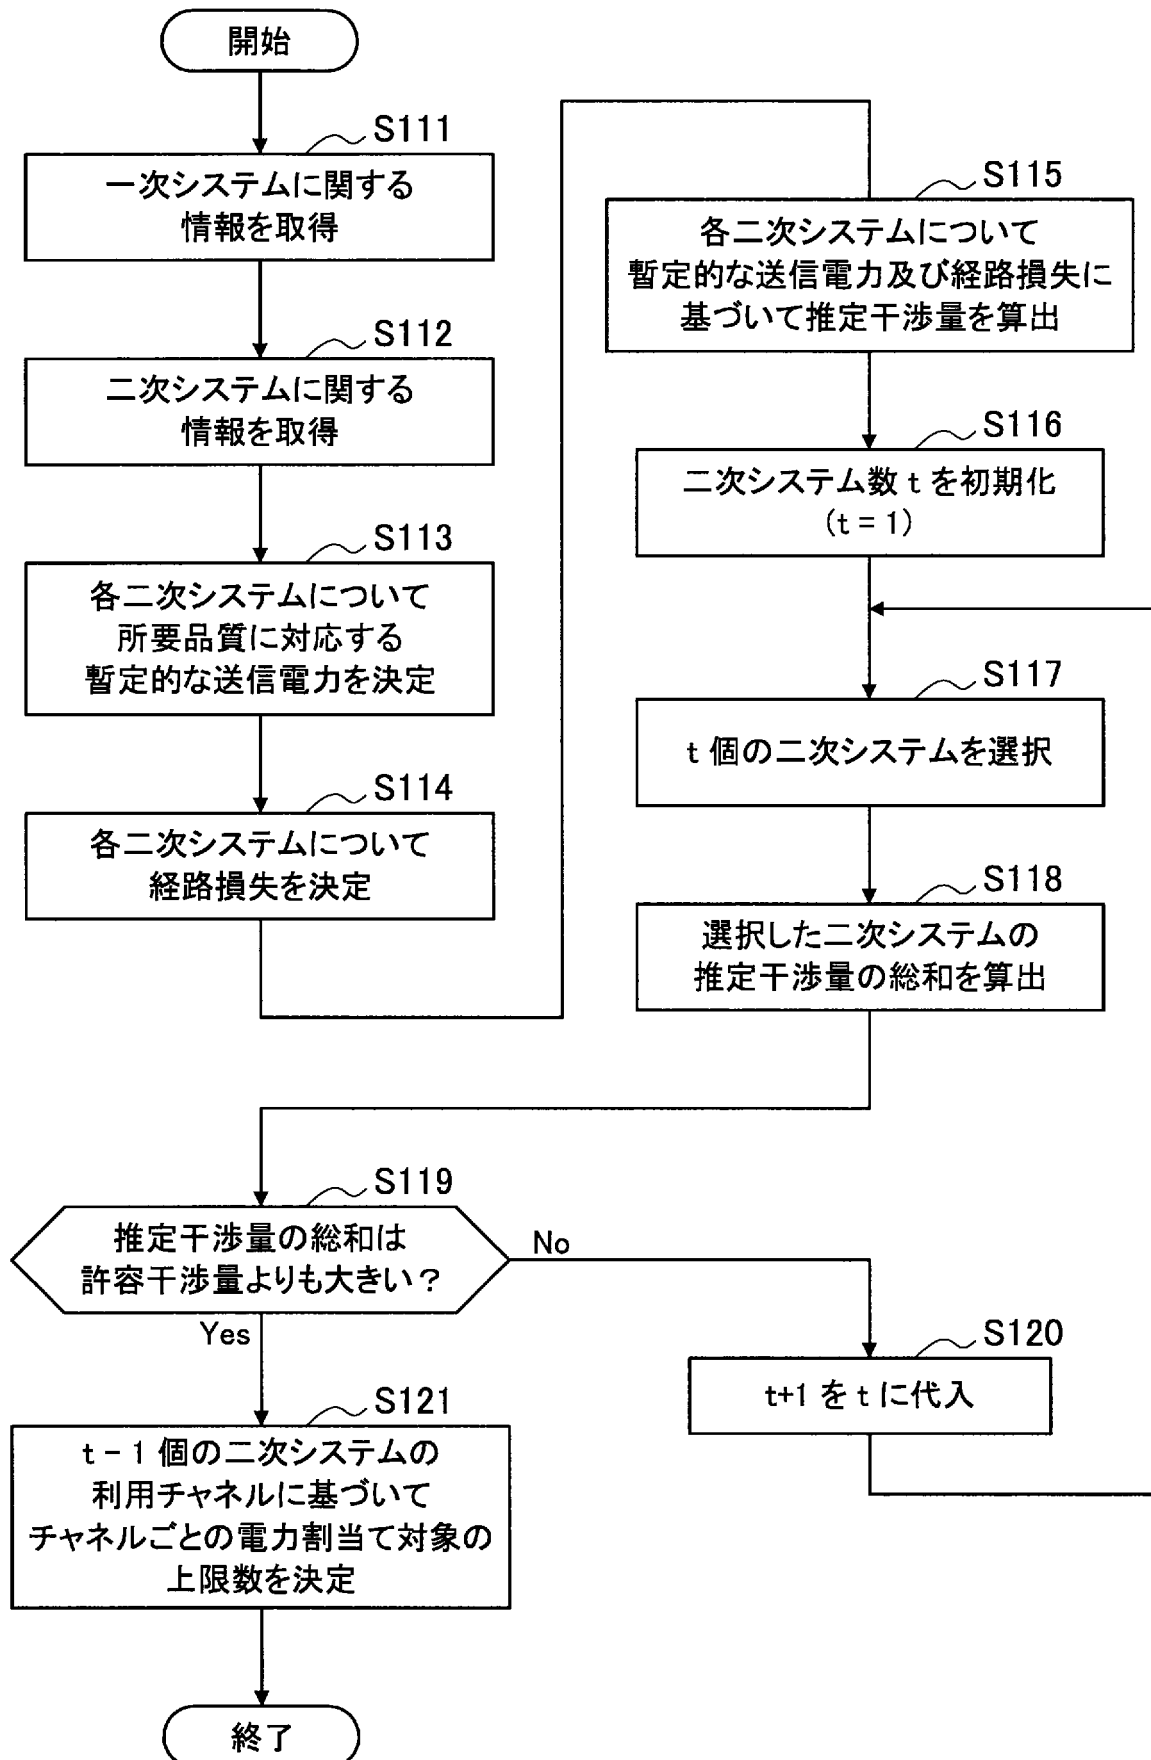


[図8]

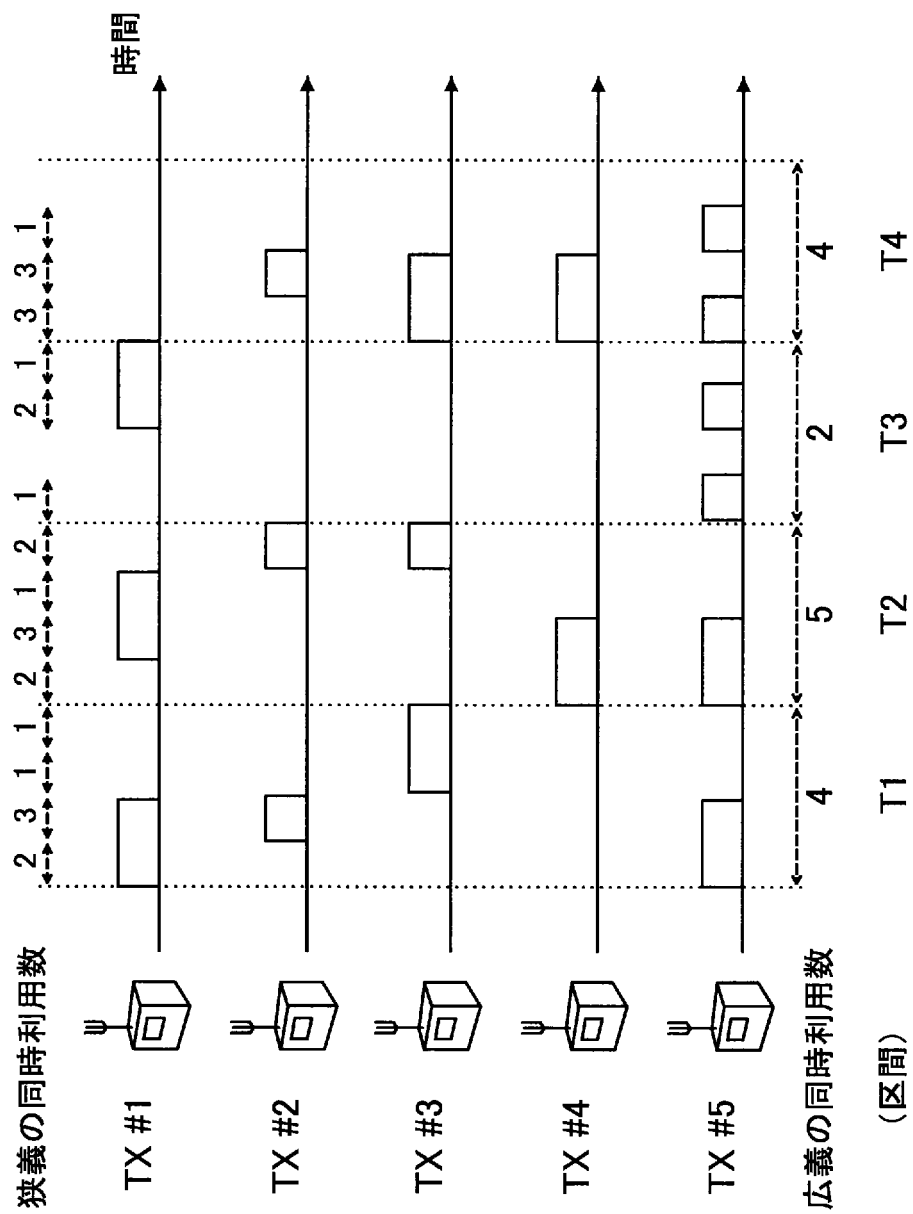


[図9A]

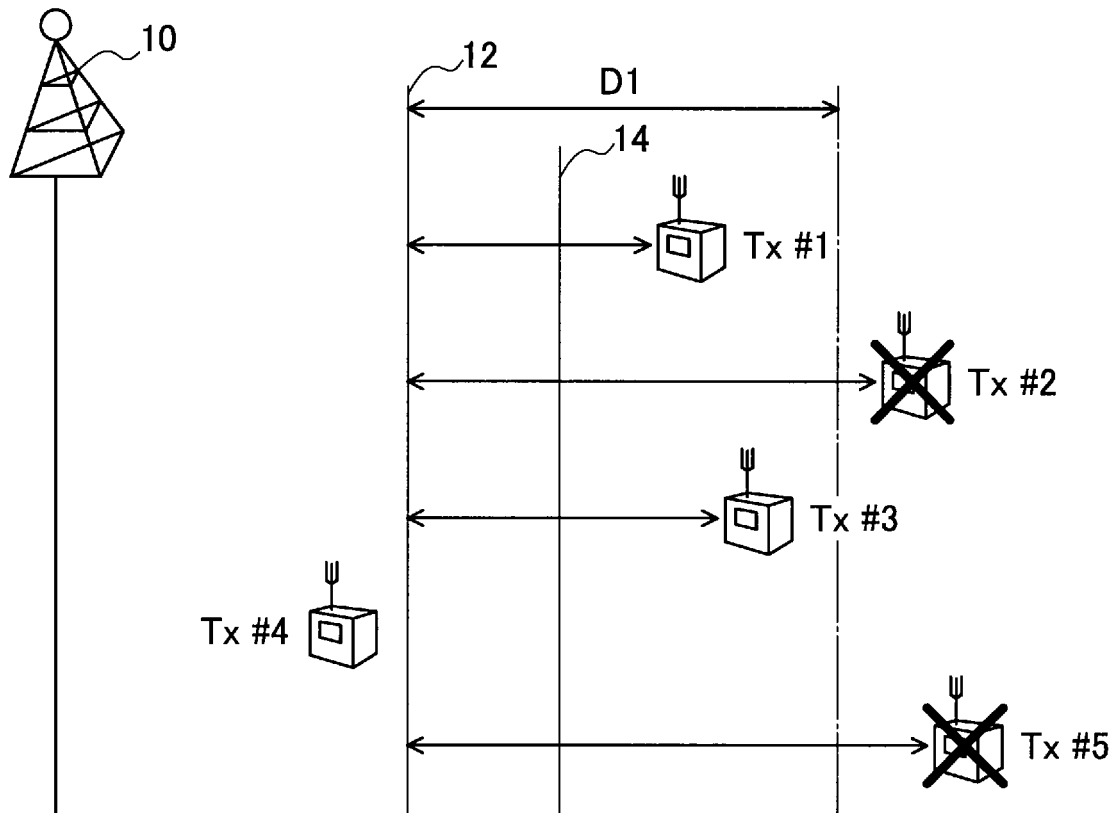


[図9B]

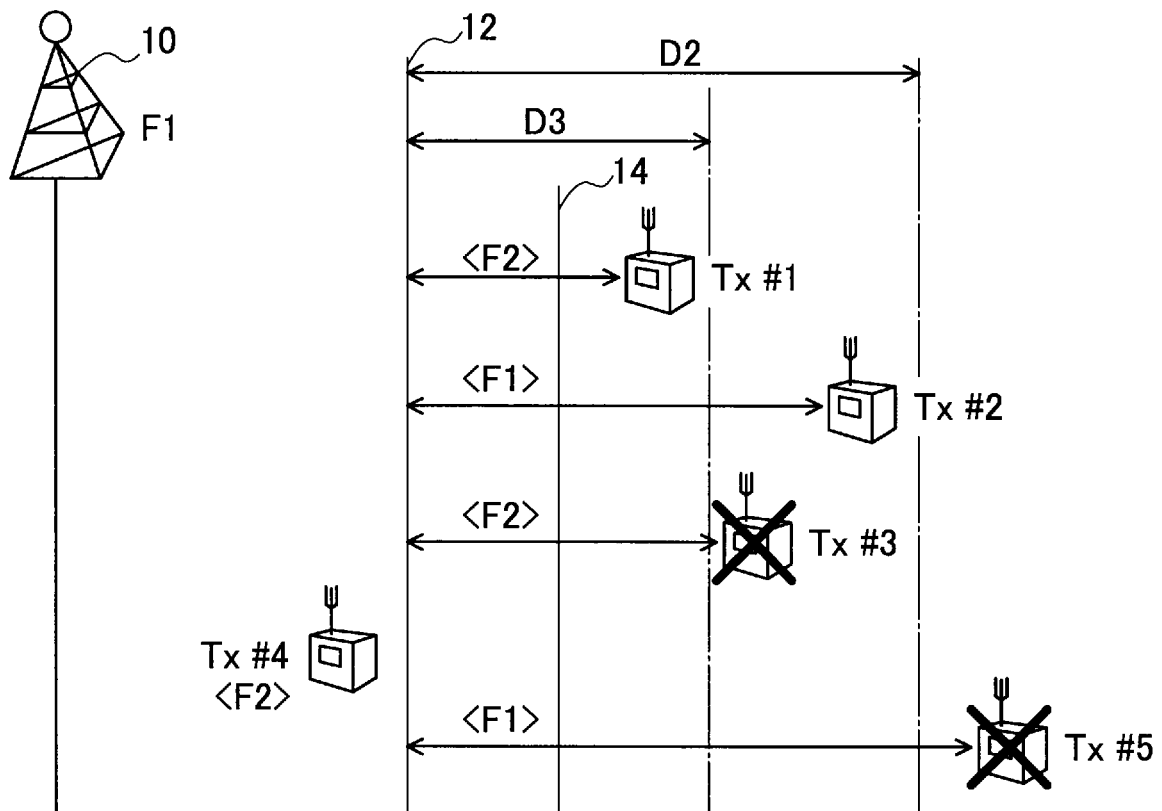


[図10A]

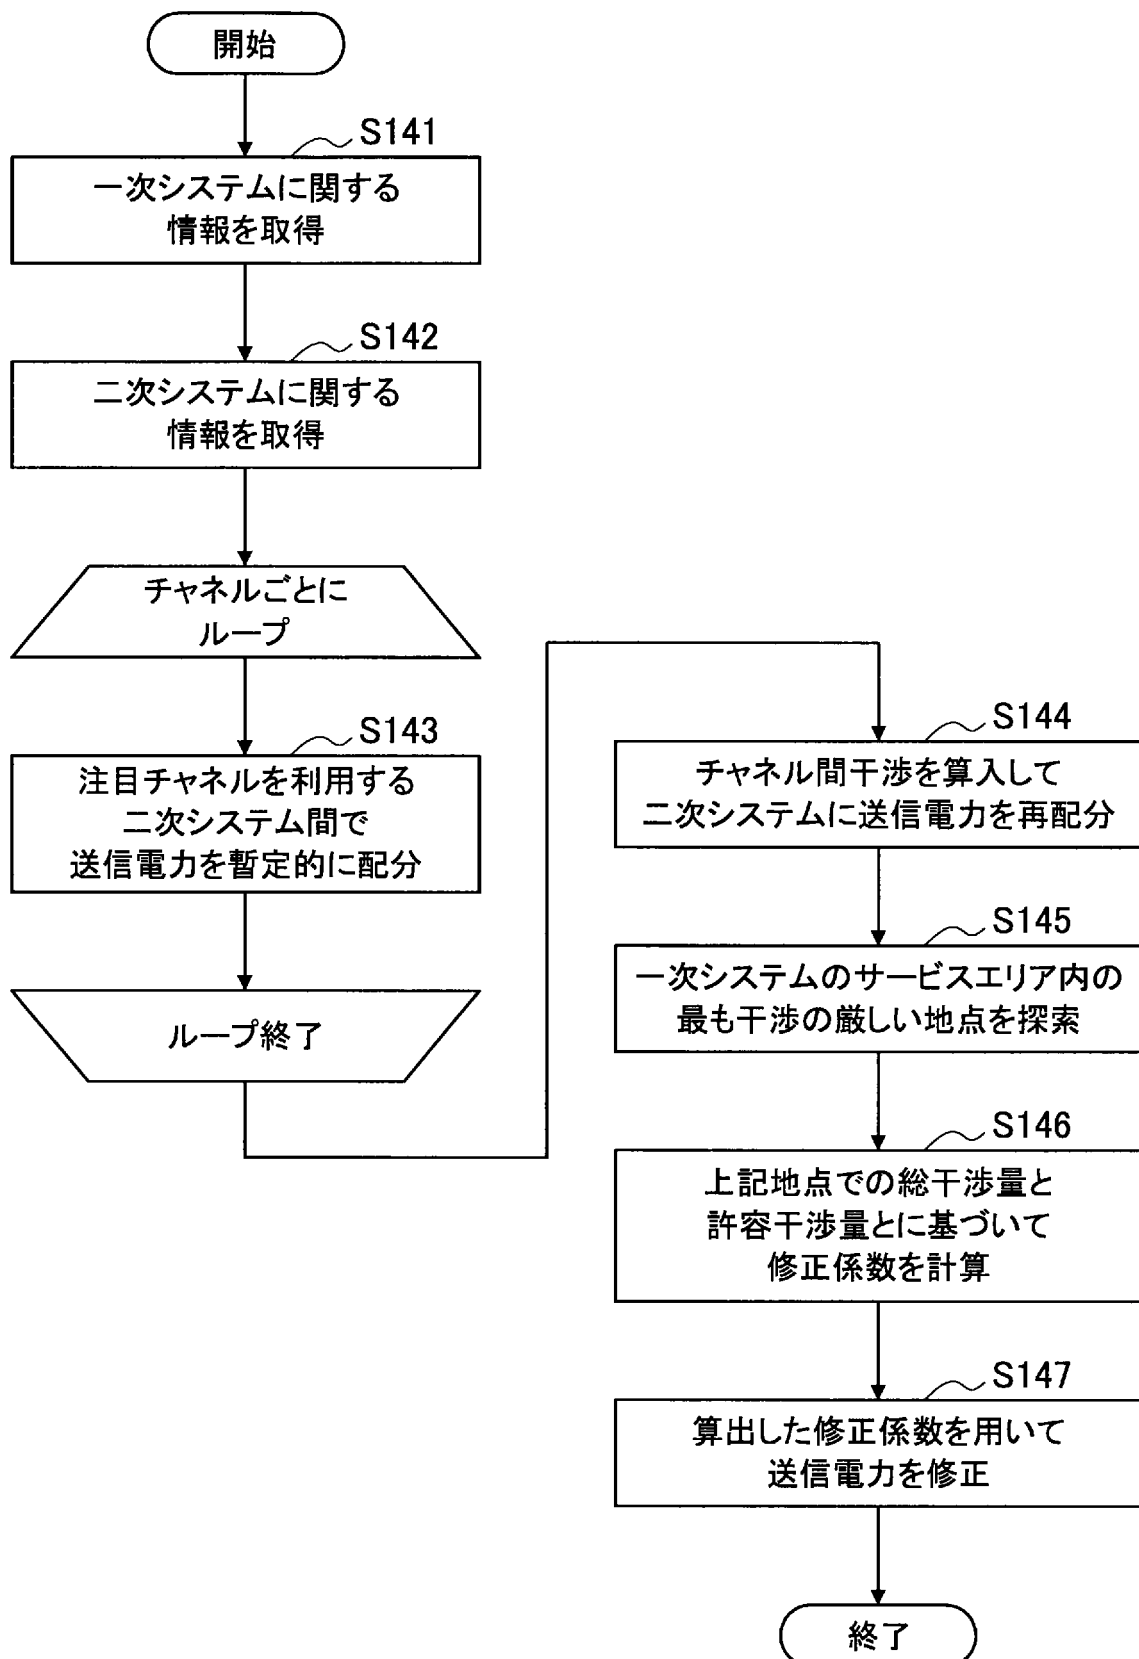


[図10B]

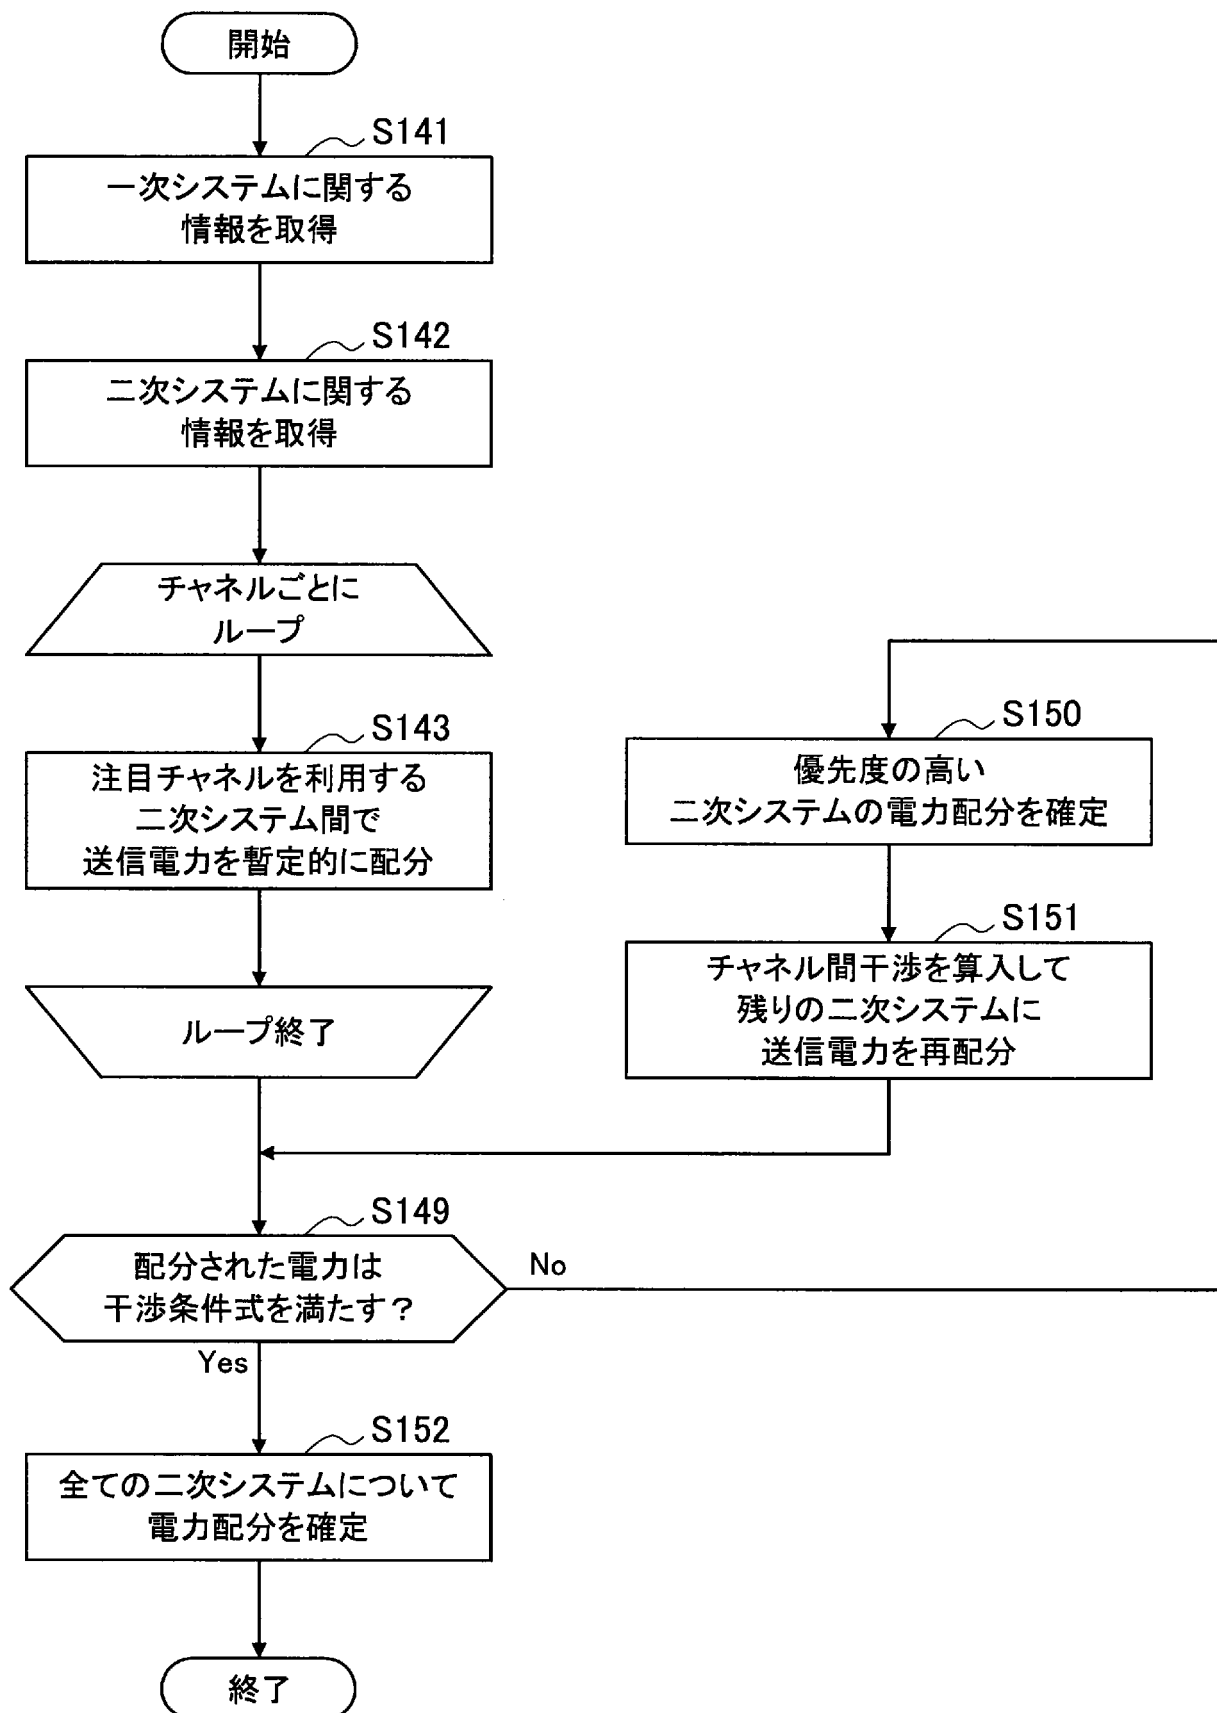

[図10C]

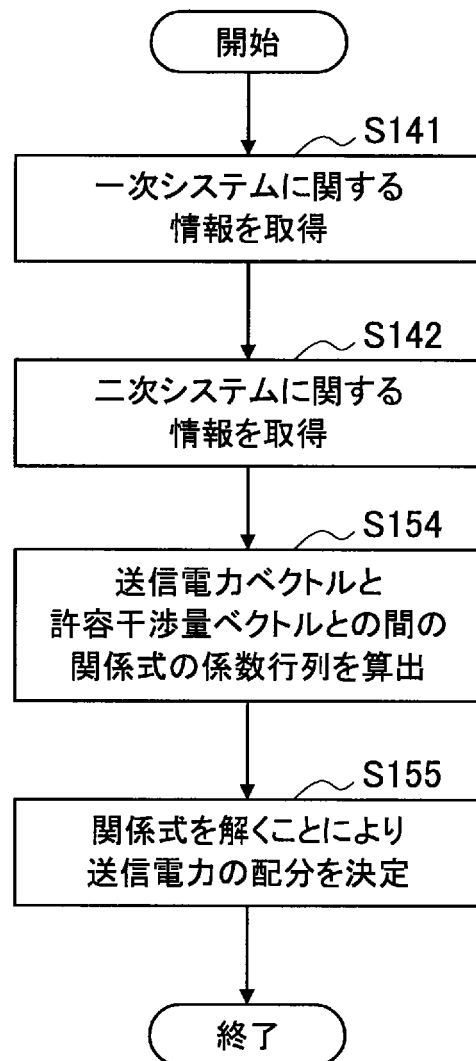

[図11]

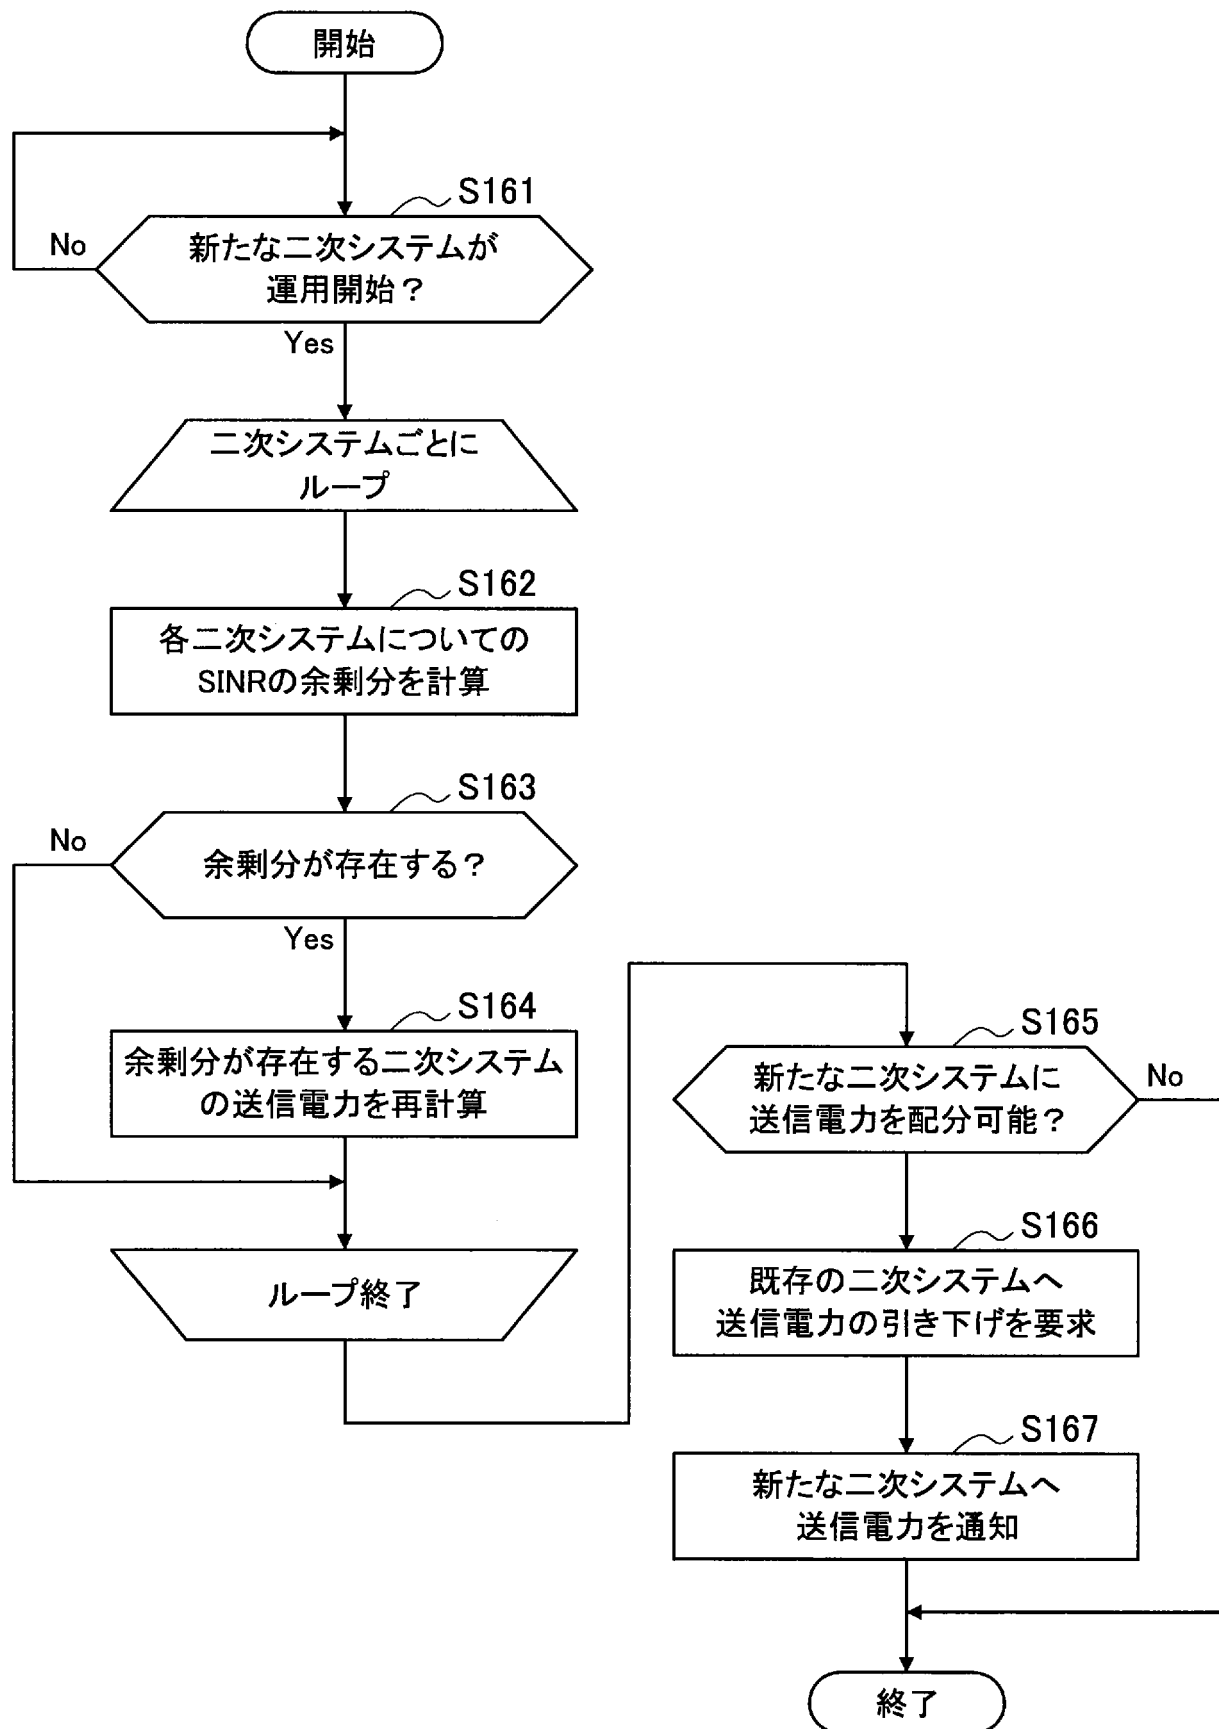


[図12]


チャネル番号	二次システム ID	所要品質	余剰率	送信電力 割当て
#1	K01	$\text{SINR}_{\text{req}}(\text{K01})$	1.2	P (f1,K01)
	K02	$\text{SINR}_{\text{req}}(\text{K02})$	1.0	P (f1,K02)
	:	:	:	:
#2	K01	$\text{SINR}_{\text{req}}(\text{K01})$	1.4	P (f1,K02)
	:	:	:	:
:	:	:	:	:

二次システム管理テーブル


[図13A]

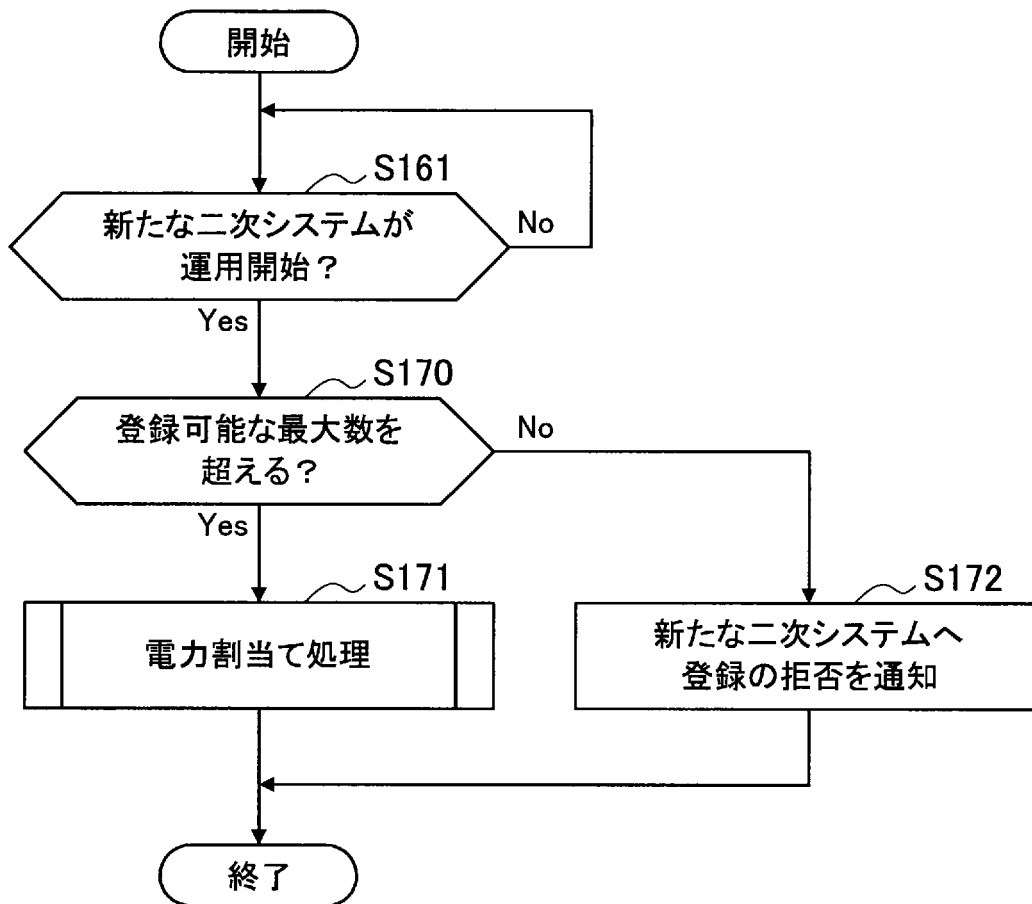


[図13B]

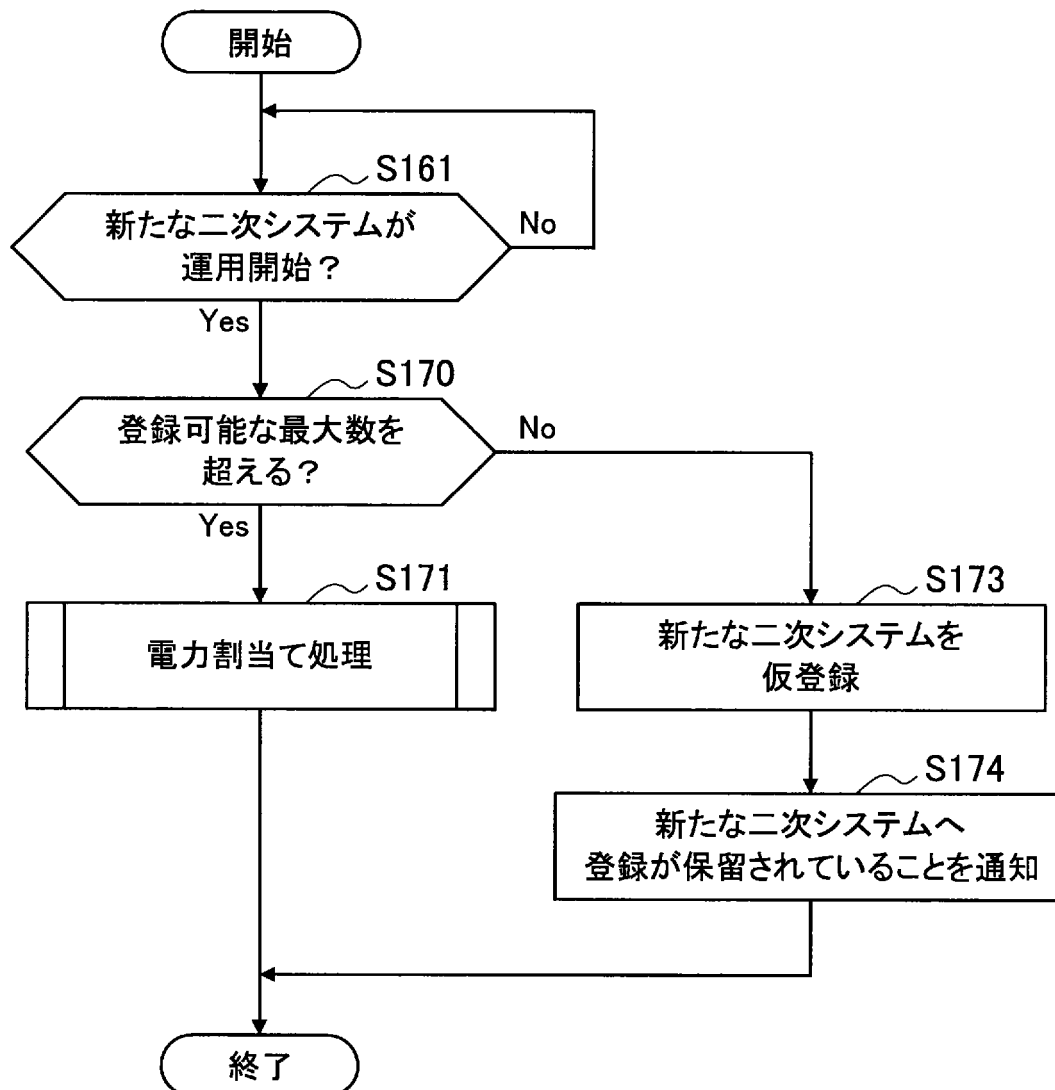


[図13C]

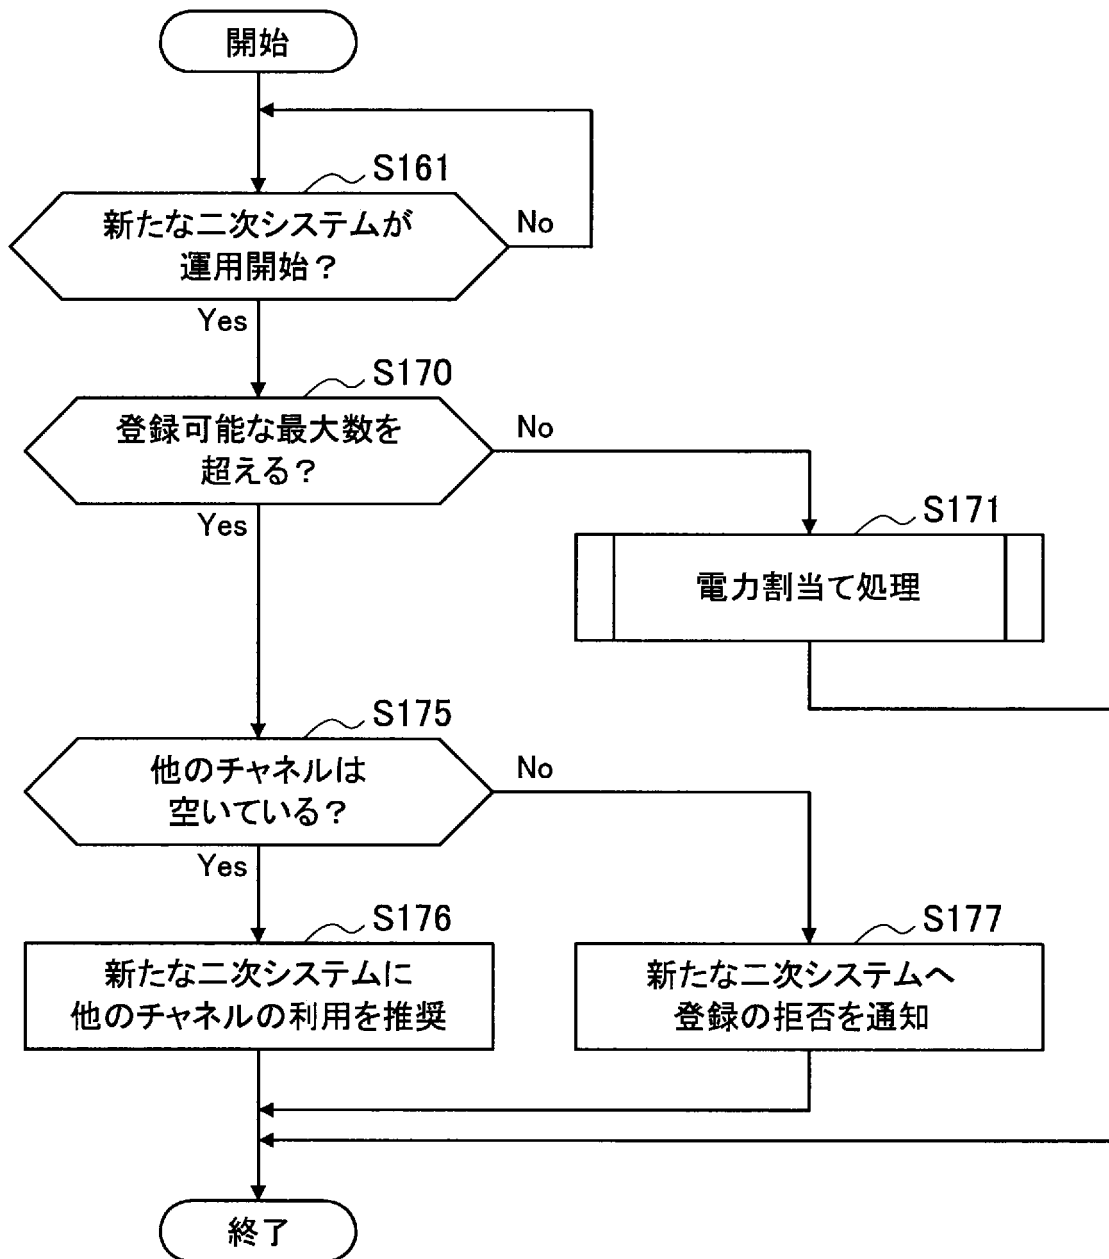


[図14A]

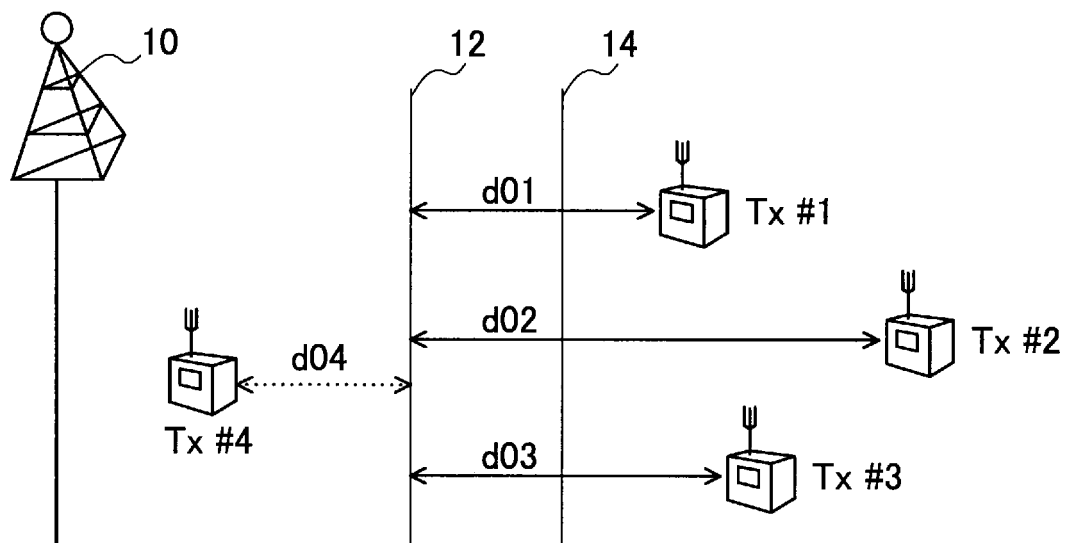


[図14B]

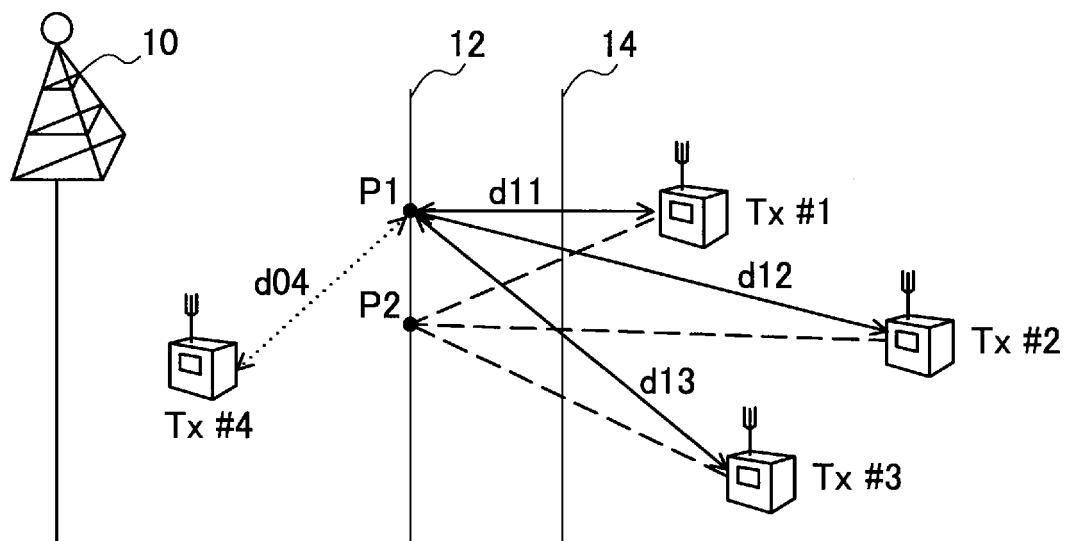


[図14C]

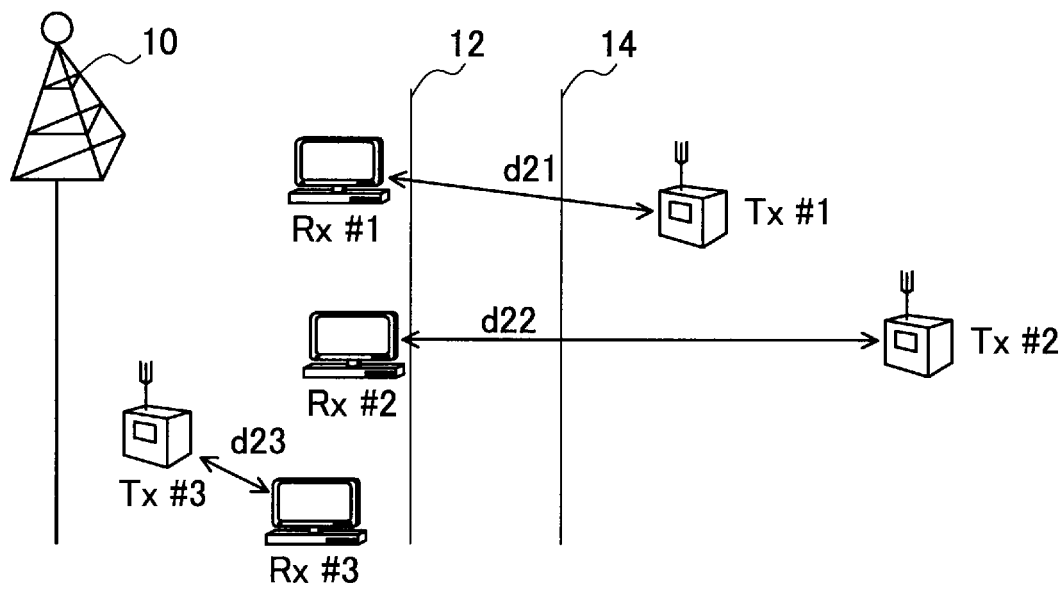


[図14D]

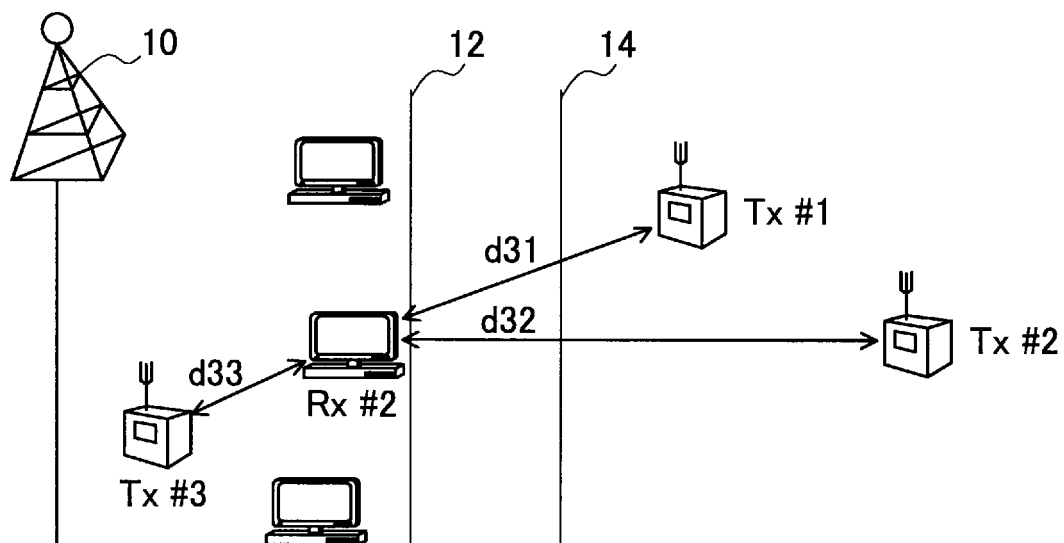

[図15]

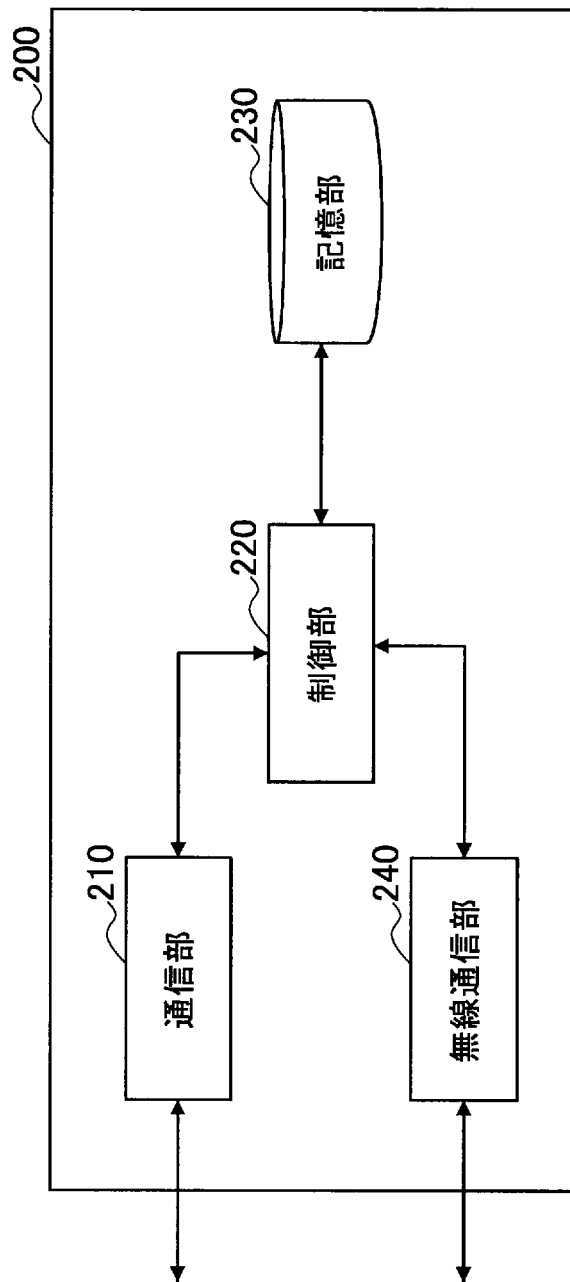

[図16]

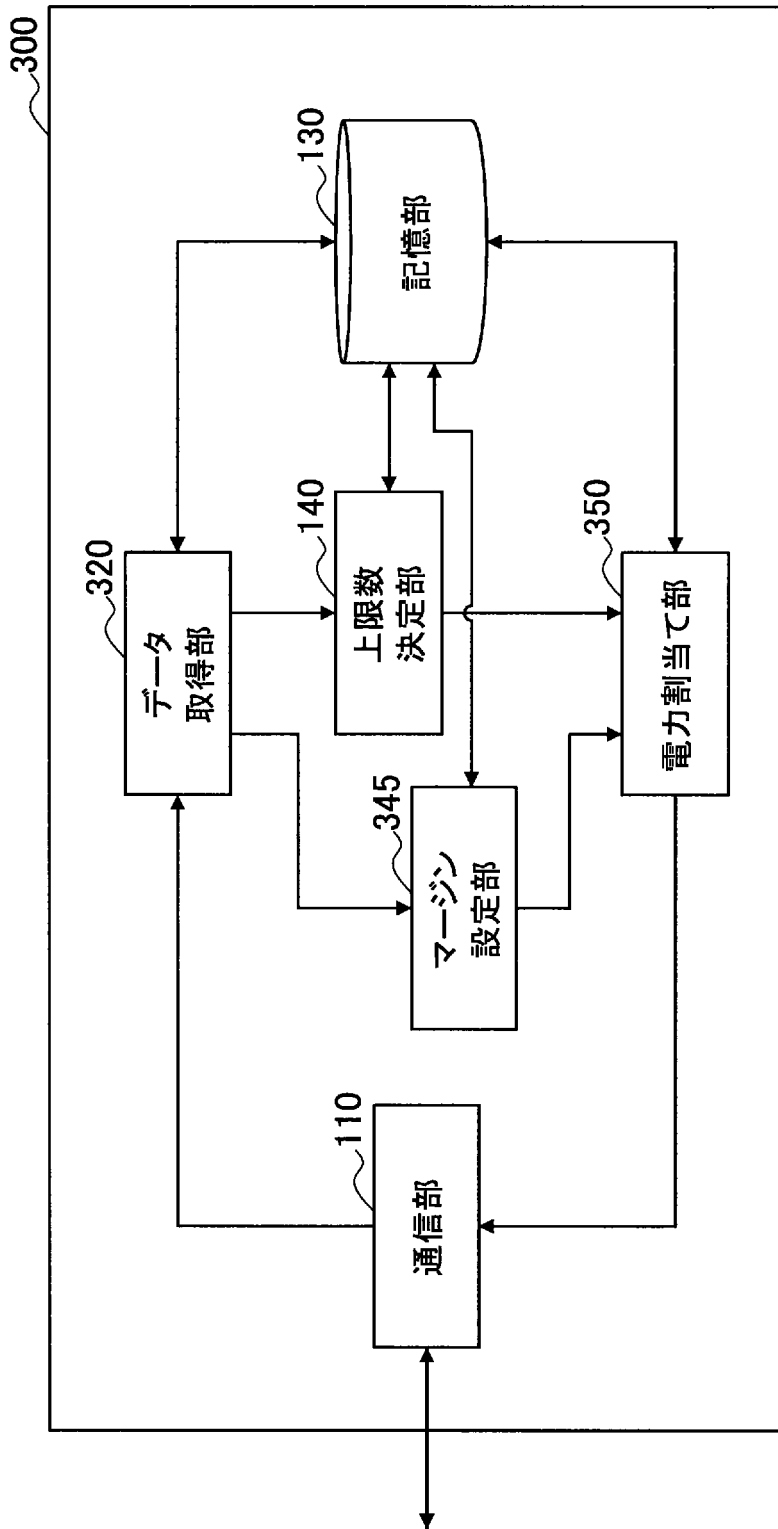

[図17]

