

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
15 February 2001 (15.02.2001)

PCT

(10) International Publication Number
WO 01/11153 A1

- (51) International Patent Classification⁷: E03D 9/04 (74) Agent: PECK, Moon, Koo; Peck, Chung & Co., Handuk Building, 3th floor, 649-4, Yoksam-dong, Kangnam-gu, Seoul 135-080 (KR).
- (21) International Application Number: PCT/KR00/00807
- (22) International Filing Date: 26 July 2000 (26.07.2000) (81) Designated States (*national*): AE, AL, AT, AU, BA, BG, BR, CA, CH, CN, CR, CU, CZ, DE, DK, DM, ES, FI, GB, GH, HU, ID, IL, IN, JP, KE, KP, KZ, LK, MA, MG, MN, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, TR, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: Korean
- (26) Publication Language: English
- (30) Priority Data:
1999/16249 9 August 1999 (09.08.1999) KR
1999/45638 20 October 1999 (20.10.1999) KR
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): BioEN CO. LTD [KR/KR]; 151-3 Wonchun-dong Paldal-gu, Suwon, Kyungki-do 442-822 (KR).
- Published:
— With international search report.
- (72) Inventor; and
(75) Inventor/Applicant (*for US only*): LEE, Doo-Gyun [KR/KR]; 1-19 Nongsung-dong, Seo-gu, Kwangju 502-200 (KR).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: ODOR EXHAUSTING APPARATUS FOR WATER CLOSET

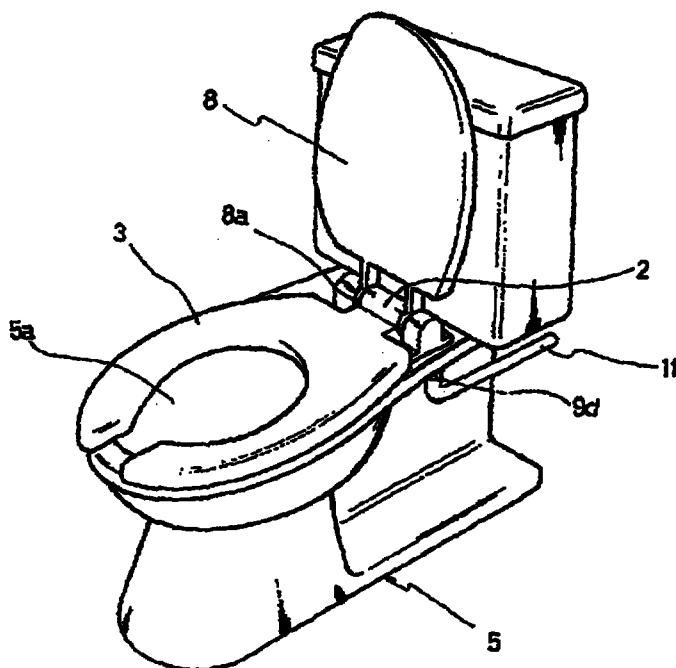

(57) Abstract: The object of this invention is to provide a toilet and an odor exhausting apparatus for such toilets, designed to quickly suck odor from the toilet bowl to a chimney pot installed on the rooftop during defecation or urination so as to quickly expel the odor into the atmosphere outside a house. In the apparatus, the seat (3) has a cavity (1d), a plurality of odor suction ports (1f), a tubular hinge joint (2) and an odor outlet port (1e). A connection pipe (6), having an inlet port (6a), is set within the hinge joint (2). A seat cover (8) is coupled to the connection pipe (6) through a toothed engagement. A tubular shaft (7), having an inlet port (7a), is rotatably set within the connection pipe (6), and communicates with the atmosphere outside the house through a pipeline (12). When the cover (8) is closed, the port (7a) is closed by the sidewall of the connection pipe (6). However, when the cover (8) is opened, the port (7a) communicates with the port (1e) of the seat (3) through the port (6a) of the connection pipe (6), thus automatically expelling odor from the toilet bowl to the atmosphere due to suction force of the pipeline.