


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61J 7/04	A1	(11) International Publication Number: WO 99/43284 (43) International Publication Date: 2 September 1999 (02.09.99)
(21) International Application Number: PCT/NL99/00105 (22) International Filing Date: 25 February 1999 (25.02.99) (30) Priority Data: 1008430 26 February 1998 (26.02.98) NL (71) Applicant (for all designated States except US): IR. H.P. WOLLESWINKEL HOLDING B.V. [NL/NL]; Meentweg 126, NL-3454 AX De Meern (NL). (72) Inventors; and (75) Inventors/Applicants (for US only): WOLLESWINKEL, Hendrik, Paul [NL/NL]; Meentweg 126, NL-3454 AX De Meern (NL). SCHMITZ, Menno, Ramon [NL/NL]; Haarweg 253, NL-6709 RT Wageningen (NL). KRIJGSMAN-WICHES, Ida, Lucina [NL/NL]; Hekendorperweg 33, NL-3421 VJ Oudewater (NL). RAAIJMAAKERS, Prosper, Julius, Ivo, Marie [NL/NL]; Zilverwilg 6, NL-5237 HR 's-Hertogenbosch (NL). VAN LAAR, Teunis [NL/NL]; Kopeind 2, NL-2411 WG Bodegraven (NL). (74) Agent: LAND, Addick, Adrianus, Gosling; Arnold & Siedsma, Sweelinckplein 1, NL-2517 GK The Hague (NL).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. In English translation (filed in Dutch).

(54) Title: DEVICE, ASSEMBLY AND SYSTEM FOR ENHANCING RELIABLE AND MONITORED INTAKE OF PRODUCTS AND A METHOD FOR MANUFACTURE THEREOF

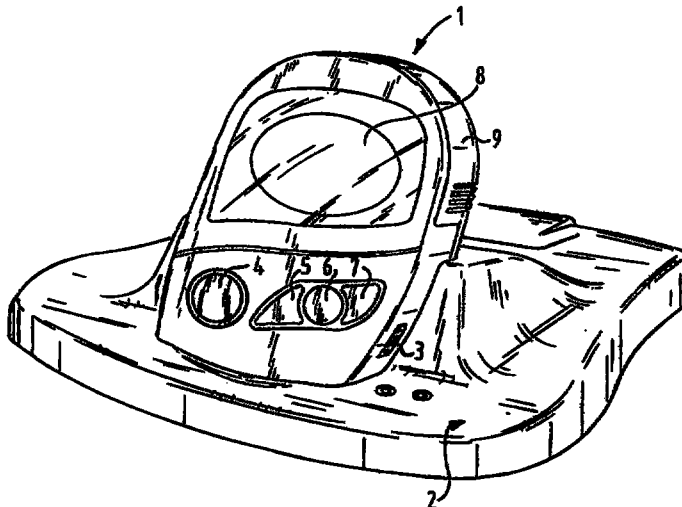

(57) Abstract

The present invention relates to a device for enhancing reliable and monitored intake of products, in particular medication, comprising: a product container for holding the products to be taken; a product passage for allowing passage of products out of the product container, which product passage can be placed into at least an opened and closed position; a registration member coupled to the product passage for generating a registration signal which indicates that a transition from the closed to the opened position of the product passage and/or vice versa has taken place; clock means for generating a time signal; processing means coupled to the clock means and the registration member for processing the registration signal and the time signal; memory means which are coupled to the processing means and to which the processing means provide a memory signal with registration and time data, and to an assembly of the device with at least two disc members.