

FIG. 1

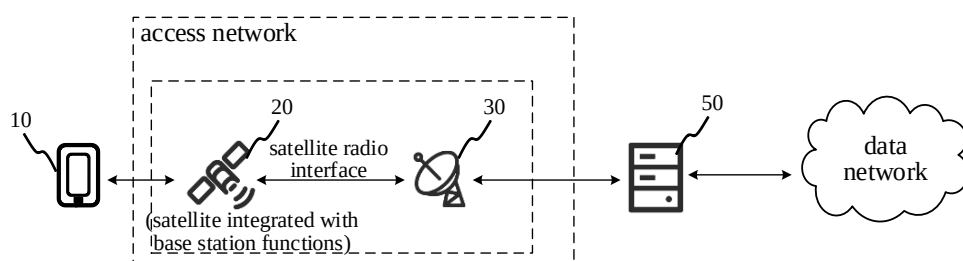


FIG. 2

in a case that a GNSS of the terminal device is outdated, a target parameter of radio link failure (RLF) is set

201

FIG. 3

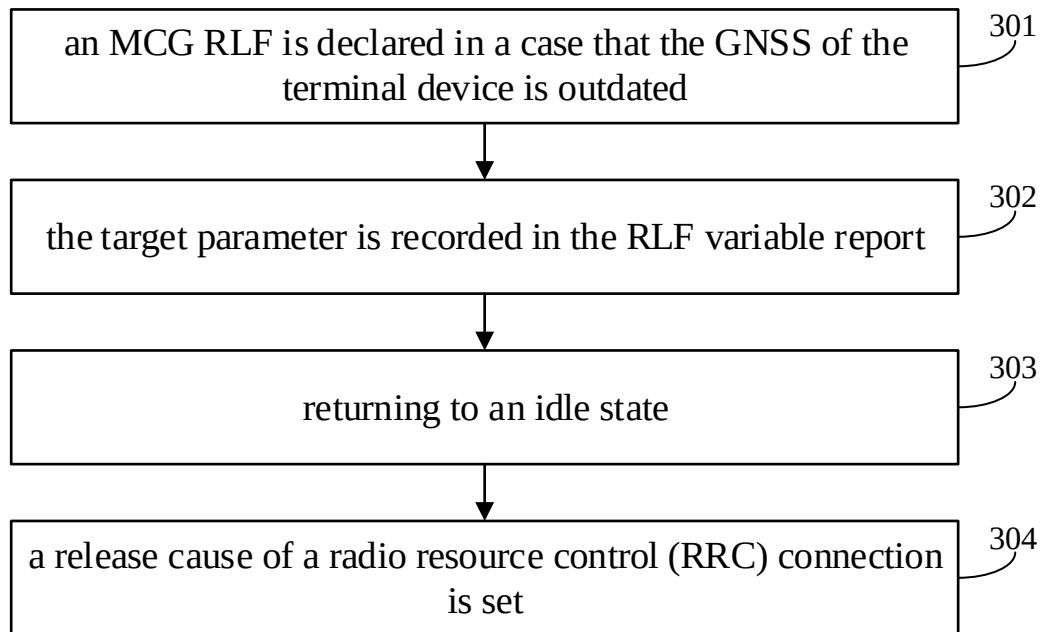


FIG. 4

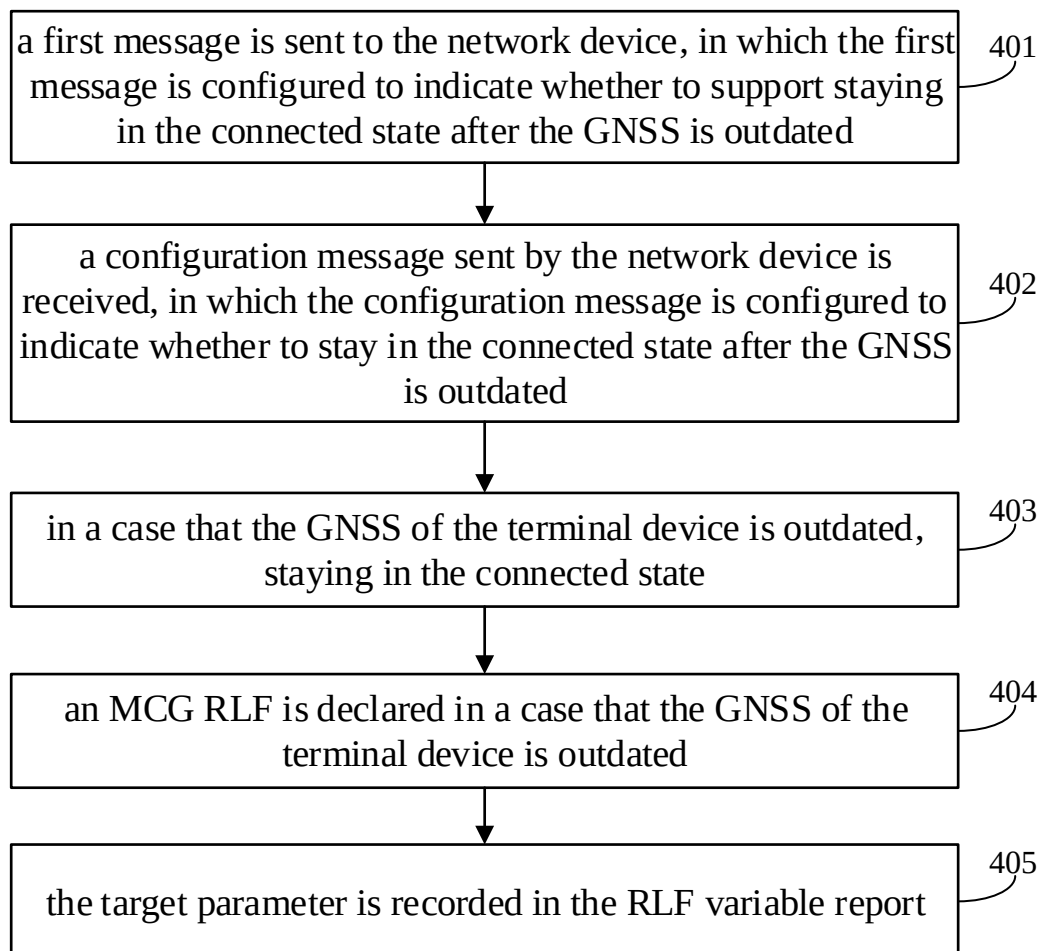


FIG. 5




FIG. 6

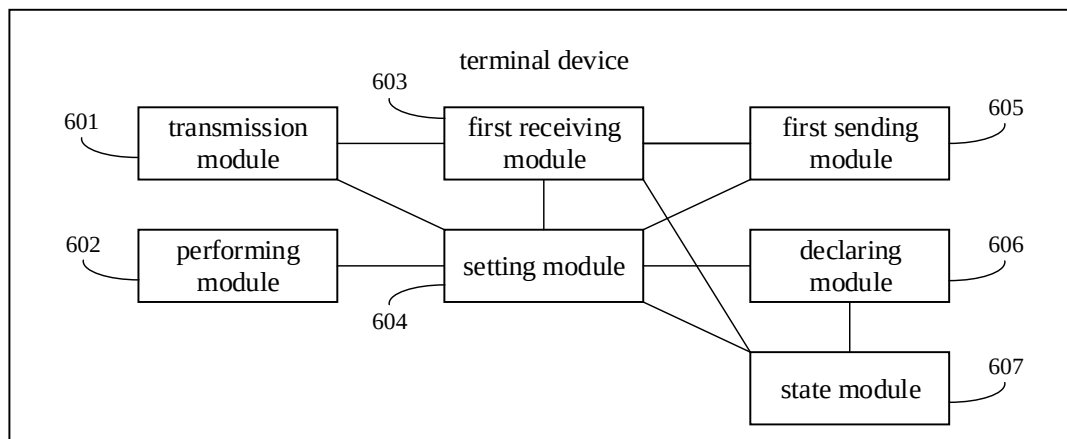


FIG. 7

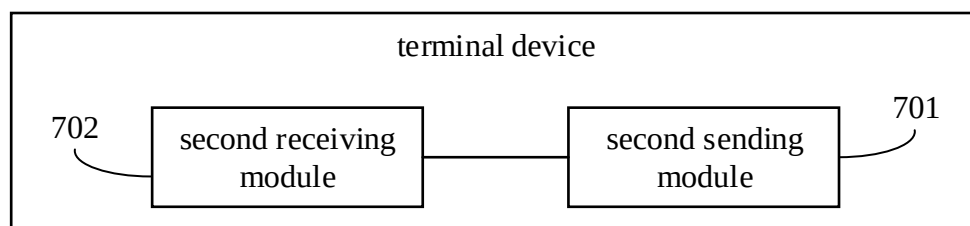


FIG. 8

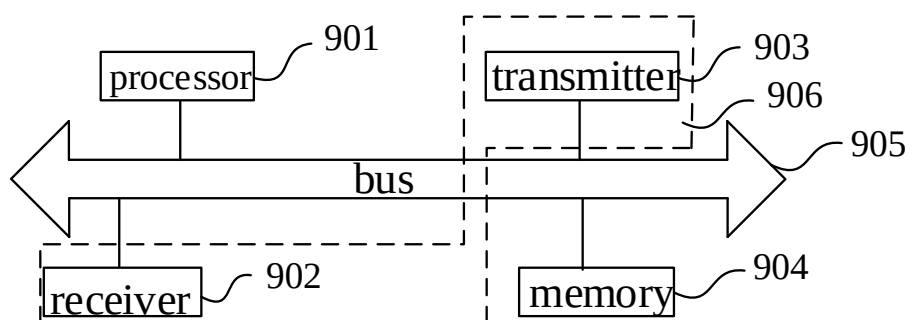


FIG. 9