



(51) International Patent Classification:
E21B 43/08 (2006.01)

(21) International Application Number:
PCT/US2010/042406

(22) International Filing Date:
19 July 2010 (19.07.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/533,151 31 July 2009 (31.07.2009) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HAMMER, Aaron, C.** [US/US]; 2210 W. Dallas St., Apt. 1414, Houston, TX 77019 (US). **CLEM, Nicholas, J.** [US/US]; 5302 Lamonte Lane, Houston, TX 77092 (US). **O'MALLEY, Edward, J.** [US/US]; 720 Rutland St., Houston, TX 77007 (US).

(74) Agent: **DUPHORNE, Darin, H.**; Baker Hughes Incorporated, P.O. Box 4740, Houston, TX 77210-4740 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

(54) Title: MULTI-ZONE SCREEN ISOLATION SYSTEM WITH SELECTIVE CONTROL

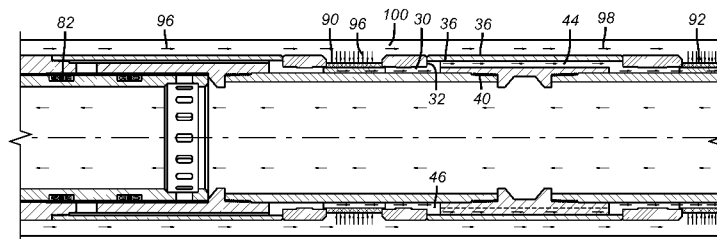


FIG. 8a

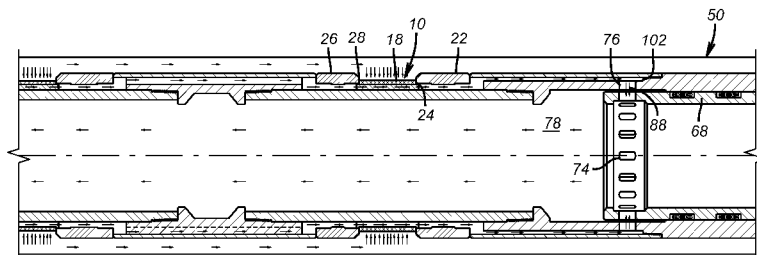


FIG. 8b

(57) Abstract: A modular screen system allows connection of screens using couplings that connect the annular space in each module between the screen material and the base pipe. A series of connected screens and couplings feed into a single valve to control the flow through many screens. The valve is preferably located in a coupling and the passages through the coupling or the screen can also accommodate instrumentation to detect, store or transmit well data or flows through the various screen modules.



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*