

RESOURCE ACCESS CONTROL SYSTEM

5

FIELD OF THE INVENTION

10 This invention relates to preventing fraudulent access to a resource, and particularly to methods and means for blocking or disconnecting telephone calls, in real time, from callers that are attempting to gain fraudulent access to telephone networks.

BACKGROUND OF THE INVENTION

15 Fraudulent telephone calls are a major source of revenue loss to telephone service providers. They also result in customer dissatisfaction when tolls are inadvertently charged to the subscriber as a result of fraudulently placed calls. Present systems use batch mode
20 analysis of call details and sometimes manage to detect some types of fraud. This arrangement requires the telephone company to communicate with the culprit to end the abuse. It entails a delay in the prevention of fraud.

25

30 An object of the invention is to overcome the disadvantages of prior systems.

Another object of the invention is to detect and

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

block or disconnect fraudulent access demands in real time.

SUMMARY OF THE INVENTION

According to a feature of the invention, these
5 objects are attained by storing, in a control data base, a set of attributes concerning an access from an access demand source; maintaining a rules data base of rules concerning attributes for determining corrective action; determining whether data the control data base matches the
10 rules in the rules data base; and effecting corrective action by disconnecting the access during access time in response to a match between data in the control data base and data in the rules data base.

According to another feature of the invention.
15 storing in the control data base includes storing in a first access data base a first set of attributes concerning the ongoing access.

According to another feature of the invention, storing in the control data base includes storing in a
20 second access data base a second set of attributes concerning the history of prior accesses made by the access demand source; the step of determining whether data the access data base matches the rules in the rules data base includes determining whether to disconnect the
25 access, block future accesses, or take other action; and the step of effecting corrective action includes disconnecting the access, blocking future accesses, or taking other action.

According to another feature of the invention,
30 the second access data base is updated on the basis of the matches.

These and other features of the invention are pointed out in the claims. Other objects and advantages of the invention will be evident from the following .

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

detailed description when read in light of the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a telephone network embodying
5 features of the invention.

Fig. 2 block diagram of a control system in the network of Fig. 1 according to an aspect of the invention.

Figs. 3 and 4 show the rules for operation of the network and system in Figs. 1 and 2 for CPE fraud
10 according to an aspect of the invention.

Figs. 5 and 6 show the rules for operation of the network and control system in Figs. 1 and 2 for CPE fraud according to an aspect of the invention.

Figs. 7 and 8 show the rules for fraud involving
15 hacking to remote access ports of CPE (Customer Premises Equipment) and SDN-NRA (Software Defined Network - Network Remote Access) according to an aspect of the invention.

Fig. 9 shows the rules to detect fraud involving multiple calls with the same SDN code or cellular MIN, and
20 successive cellular calls with far apart originating locations from the same caller according to an aspect of the invention.

Figs. 10 to 12 shows the rules for multiple calls likely to be actual fraud calls through the CPE
25 according to an aspect of the invention.

Fig. 13 shows rules for detecting various kinds of miscellaneous fraud according to an aspect of the invention.

Fig. 14 is a flow chart illustrating operation
30 of the system in Figs. 1 and 2.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Fig. 1 illustrates an arrangement embodying features of the invention. Here, a telephone switch

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

network TSN connects a caller, or access demand source, ADS to a called party or egress EGR through two switches or central offices, namely, an originating action control point ACPO and a terminating action control point ACPT.

5 The originating action control point ACPO and the termination action control point ACPT communicate with call detail recording platforms (CDRPs) RP1 and RP2 to supply the latter continuously with call detail records on a real-time basis. The action control points ACPO and
10 ACPT generate these records for billing and record keeping by the CDRPs.

The CDRPs RP1 and RP2 also communicates with a control system CS1 which taps into the event message stream in the CDRPs RP1 and RP2 on a real-time on-demand
15 basis. This means that the data is available to the control system CS1 while the call is going on. The control system CS1 analyzes the information elements which are contained in the CDRPs RP1 and RP2, as part of the detection of fraud events. In one embodiment of the
20 invention, the control system CS1 accesses the data on all calls in the CDRPs RP1 and RP2. According to a preferred embodiment the control system CS1 accesses, from the CDRPs RP1 and RP2 only data for particular types of calls likely to produce significant fraud costs, namely:

- 25 - Calls which are very short duration (<10 sec)
 These are interesting because these may be generated by automatic hacking devices.
- Calls which are very long duration (>20 min).
- 30 - International calls.
- Calls placed on business customer's equipments and on business communication services. (Fraud call charges are billed mostly to business customers.)



Limiting the access to calls of this sort, eliminates the bulk of telephone calls from scrutiny by the control system CS1. These eliminated calls are normal calls which have a very low probability of incidence of fraud. When such incidences do occur, the loss to the network is small because they tend to be short distance domestic calls of short duration. This prefiltering, selects only calls which have an economically significant fraud cost to the network for transmission from the CDRPs RP1 and RP2 to the control system CS1.

According to one embodiment of the invention, the CDRPs RP1 and RP2 perform the selection, i.e. prefiltering, and according to another embodiment, the control system CS1 performs the prefiltering. In the latter embodiment, the CDRPs RP1 and RP2 accumulate the prefiltered records of all the calls which are being originating and progressing through all the toll switches of the area served by it for a small and convenient interval, say 15 seconds and sends the set to the control system CS1. The data on the prefiltered calls sent to the control system CS1 are herein called X-records.

The control system CS1 also exchanges data with a fraud intelligence unit (FIU) FI1, a telephone company corporate security administration monitor (CSAM) CSA1, and other control systems. The fraud intelligence unit FI1 has a database which stores "historic" information which is used for reference, to decide whether an information element on a record is significant for fraud detection or not.

According to an embodiment of the invention, the database of the fraud intelligence unit FI1 stores the following information:

-PBX ANIs (Private Branch Exchange Automatic Number Identifications).

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

- University PBX's and Centrex's.
- Suspicious NPAs-NXX for originating numbers.
- Suspicious Terminating Numbers.
- Suspicious Country codes.
- 5 -Forbidden country codes.
- Compromised Authorization Codes.
- ANI's from detected fraud events.
- Originating numbers from detected fraud events.
- Terminating numbers from detected fraud events.
- 10 -Authorization codes from detected fraud events.
- Other optional files entered manually by CSAM
CSA1

In other embodiments, the FIU FI1 contains other information.

15 Fig. 2 is a block diagram of the control system CS1 in Fig. 1. The control system CS1 is preferably in the form of a single processor which performs its various functions. Fig. 2 shows the control system as composed of individual sections, namely a received record buffer
20 section RBS1, an analysis section AS1, a rules section RS1, and a fraud containment section FC1. However, each of the blocks preferably represents a function of the processor, rather than an individual unit, and the processor may perform all the functions with the same
25 hardware. Nevertheless, according to an embodiment of the invention, any or all the blocks may be a separate section or unit. The blocks in the control system CS1 are referred to as sections for convenience.

The control system CS1 accesses the data from
30 the CDRPs RP1 and RP2 and the fraud intelligence unit FI1 and matches the accessed data with a set of rules which the control system stores. The rules appear in Figs. 3 to 13 and define the existence of various levels of fraud events such as HHa, HHb, HH, H, M, and L. If the data

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

matches a high level HHa, the control system CS1 signals the signal transfer point STP1 to disconnect the ongoing call. If the level is HHb, it signals the signal transfer point STP1 to block the next call from the access source
5 ADS.

The control system CS1 also transfers information about detected fraud events to the CSAM CSA1 to raise alarm signals so that the network personnel can take appropriate manual control. Such manual operation
10 may override the control system CS1 and disconnect selected calls or block selected calls, or to inhibit the disconnect or blocking action of the control system CS1. The CSAM CSA1 can also enter new information into the fraud intelligence unit FI1 database.

15 In Fig. 2, the control system CS1 receives the set of records from the CDRPs RP1 and RP2 and enters it to the received records buffer section RBS1. The analysis section AS1 receives the data from the buffer section RBS1 and uses the data from the fraud intelligence unit FI1 to
20 derive vectors each of which conforms to a data element or characteristic in the rules in Figs. 3 to 13. In other words, in order to match the data to the rules, the data must be in the format of each of the elements or characteristics of the rules. Accordingly, the analysis
25 section AS1 vectors which specify whether a call is:

- During business hours.
- During non-business hours.
- Excessively long.
- Domestic calls.
- 30 -To a limited dialed NPA = 800.
- To a termination number = CPE.
- To a country code.
- ANI = CPE (Automatic Number Identification with Customer Premises Equipment).

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

- Using SDN-NRA (Software Defined Network -
Network Remote Access).
- To a suspected country code.
- Using a bad ANI.
- 5 -Of short duration.
- Using repeated ANI.
- From non-frequent caller.
- To successive different dialed numbers.
Using suspected patterned dialing.
- 10 -With a connect time difference using a less
than PDD (Post Dialing Delay) + e, i.e.
going from one to another number quickly.
- Using an invalid authorization code.
- With a number of calls in repeat set greater
15 than threshold.
- Using a SDN Software defined network (virtual
private network).
- Using different ANI to same termination No.
- Using the same authorization code
20 from another location greater than at least
one call continuing.
- Having greater than call duration overlap.
- With simultaneous use of mobile number.
- Cellular.
- 25 -Of the same MIN (Mobile Identification Unit).
- Using distance between call locations/elapsed
time greater than a given value τ .
- Multiple calls from same ANI (Automatic Number
Identification) greater than x.
- 30 -Repeated dialed numbers.
- Terminating at a number which is a known
DISA/RMATS (Direct Inward Switched
Access/Remote Maintained Access Test System
Maintained Port).
- 35 -Originating in suspect NPA-NXX or pay phone.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

- Multiple calls from same ANI.
- CPE (Customer Premise Equipment) to a Known high fraud country.
- CPE (Customer Premise Equipment) to known medium fraud country.
- Non CPE type of service.
- Suspicious terminating number.
- Multiple calls billed to same number.
- Multiple 800 calls exceeding preset number.

10 It will be understood that other vectors may be derived, and that the above list is by no means inclusive of all vectors possible. Other embodiments do not use all the aforementioned vectors.

 Some of these vectors deal with quantitative values such as whether a call is short or long. The analysis section AS1, in deriving the vectors, compares each quantitative value with a threshold to produce a vector that indicates a high or low quantity such as a long call or short call. The thresholds may be varied manually or automatically with the time of day, time of the month, or other circumstances, to change the criticality of the data.

 The rules section RS1 stores the rules in Fig. 3 to 13 in the form of a look-up table. Each horizontal box in Figs. 3 to 13 is a rule. In each box, the left side lists elements corresponding to vectors and the right side of each box indicates the action priority associated with the elements in the left side. The section RS1 of the processor scans the set of characteristics or vectors of a particular call and compares all the vectors with each of the rules in the boxes in Figs. 3 to 13. It determines if the vectors of a call matches a rule.

 In Figs. 3 to 13, each rule is associated with a letter designation representing an action priority, such

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

as HHa, HHb, H, M, and L. Action priorities are L for low, M for medium, H for high, HHa and HHb for very high. These designations represent the action categories which the control system CS1 would execute, if the rule became
5 "true". They depend upon the seriousness and the certainty of detection.

If any set of the vectors matches all the elements in a rule, the rules section RS1 designates the particular action priority indicated in the rule. Various
10 different calls may have vectors which satisfy several rules.

HHa and HHb are the categories that represents the highest priority of the action categories. In this case, it is considered that the detected event is certain
15 to be fraudulent and automatic action to prevent the incident is taken by the control system. If the fraud event is that of a hacker's attempt to break into the toll network, then the preventive action is to block his next attempt by diverting it to a ring busy terminal. This
20 action is signified by the action priority being HHb. If the action priority is HHa, then the solution is to disconnect the call which is in progress.

The fraud containment section FC1 responds to the rules section RSI and sends out an alert report to the
25 CSAM CSA1 and the FIU FI1 with respect to all the action priorities. If the action priority is HHb, it instructs the signal transfer points STP1 and STP2 to hold that information in a network control point NCP which handles the call processing of service calls. The latter then
30 blocks succeeding calls from the same caller for a specific time. It does this by diverting the call to a ring busy terminal.

If the action priority is HHa the fraud containment section FC1 instructs the signal transfer
35 point STP1 and STP2 to make the originating action control

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

point ACPO or the terminating action control point ACPT disconnect or otherwise disable the call. This causes the switch to disconnect the call. Thus the fraud caller will experience a hang-up in the middle of a call. If

5 successive calls within a predetermined time period arrive from that telephone, that call will be treated by blocking as for action priority HHb.

An action priority H carries the detection of a fraud event which is of slightly lower certainty but
10 nevertheless, needs immediate attention. The fraud control section FC1, in this case, calls for a human decision to execute prevention action. Such action is initiated from the corporate security administration monitor CSAM by sending special command which may result
15 in the same actions as described above.

An action priority M indicates a further grade of less certainty of detection and the action treatments similar to that of H except that the human decision to take preventive action can be more deliberate and
20 calculated to take many other aspects of the case, deriving from intelligence which are not available to the machine.

Action priority L is the lowest category. Preventive action is again human initiated, but is
25 expected to be very infrequent for this category.

For all these categories, the fraud control section FC1 enters the following information from the call record to the fraud intelligence database.

- Originating number
- 30 - Dialed number
- Terminating number
- Authorization Code used
- Action priority

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

The fraud intelligence database FI1 stores this information for future calls. It bestows a capability of learning from experience to an otherwise mechanical rule-based system. The CSAM CS1 can constantly edit and
5 monitor the intelligence thus collected via human supervision to prevent the detection process being corrupted by the uncontrolled growth of obsolete information.

The rules in Figs. 3 and 4, boxes 310 to 414
10 deal with CPE fraud. Here, boxes 334 and 410 result in HHa action priorities.

The rules in Figs. 5 and 6, boxes 510 to 524 and 610 to 617 deal with the possibility of cellular fraud or SDN-NRA (Software Defined Network - Network Remote Access)
15 fraud. Here, for example, in the matches of 520, a long SDN-NRA international call during regular business hours using a bad ANI and suspected country code results in an HH (higher H) action priority. Matches at boxes 510 and 514 result in high action priorities whereas matches at
20 boxes 517, 524, 610, 614, and 617 produce low or medium action priorities.

Figs. 7 to 13 deal mainly with multiple call events. These fraud scenarios require the characteristics contained in a number of records of the recent past. In
25 one embodiment of the invention, the rules in these figures are implemented with individual thresholds for each rule. Figs. 7 and 8 deal specifically with fraud involving hacking to remote access ports of CPE (Customer Premises Equipment) and SDN-NRA (Software Defined Network
30 - Network Remote Access). The rules in Fig. 9 detect fraud situations involving multiple calls where the same SDN authorization code or cellular MIN may be used, as well as successive cellular calls where the originating locations are too far apart to be originated by the same
35 caller.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

Figs. 10 to 12 shows the rules that apply to multiple calls when the calls are likely to be actual fraud calls through the CPE (Customer Premises Equipment). Figs. 11 and 12 show the rules for detecting the outgoing leg of actual fraud calls being perpetrated, possibly by call sellers.

Fig. 13 shows rules for detecting various kinds of miscellaneous fraud, e.g. third party fraud, collect call fraud, and card fraud to bypass 800 numbers blocks from pay phones.

As is evident, boxes 334, 410, and 510 ordain action priority HHa which result, according to an embodiment of the invention, in fraud containment section FC1 signalling to disconnect the ongoing call and, according to an embodiment, to block the next immediate call if it comes from the same caller. Boxes 810, 824, 830, 914, 917, and 924 cause the rules section RS1 via fraud containment section FC1 to signal blocking of succeeding calls which come from the same caller and have characteristics having action priority HHb.

Fig. 14 is a flow chart showing operation of the control system CS1 in Figs. 1 and 2. In Fig. 14, step 1404, the control circuit CS1 accesses new records from the CDRPs RP1 and RP2 and from the fraud intelligence unit FI1. The received-record buffer section RBS1 in the control system CS1 accesses and stores prefiltered records from the CDRPs RP1 and RP2 and other control systems CS1 at other locations and removes the oldest data if the buffer is full. The analysis section stores the data from the fraud intelligence unit FI1.

In step 1407, the analysis section AS1 in the control system CS1 accesses the next sequential record from the buffer section RBS1 and vectorizes the data in the record by using the data from the fraud intelligence unit FI1. For example, vectorizing involves taking an ANI

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

and querying the FIU FI1 if it is a bad ANI. If so, the analysis section AS1 defines it as "Using a bad ANI" and thereby places it in a format that conforms to the format of a data element or characteristic in the rules section RS1 so that the record can be matched with the record in the rules of Figs. 3 to 13. It includes applying appropriate thresholds, and referring to the records to the FIU database when needed.

In step 1420, the rules section RS1 receives the data from the analysis section AS1 and scans the vectors and compares them with the next (or the first, if this is the first) rules to see if they match the rules.

In step 1424, the rules section RS1 asks and acts if any of the combinations of vectors in this call match a rule, i.e. match all the data elements or characteristics of a rule. If yes, the rules section RS1 goes to step 1427 and directs an action priority dictated by the rule to the fraud containment section FC1. If not, it returns to step 1407 and accesses the next record.

Upon receiving the action priority, the fraud containment FC1 issues an alert report to the CSAM CS1. In step 1430, it adds the action priority and call data to the database of the fraud intelligence unit FI1 and the CSAM.

In step 1434, the fraud containment section FC1 determines if the action priority is HHa. If yes, the fraud containment section FC1 proceeds to step 1437 and sends a signal to disconnect the caller and, in an embodiment, to blocks the next immediate call from that caller. It also returns the process to step 1404. If the answer in step 1434 is no, in step 1440, the fraud containment section FC1 asks if this is of action priority HHb. If yes, in step 1444, fraud containment section FC1 sends a signal to block the next call and return the operation to step 1404. If no, it returns the operation

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

to step 1407.

While the various steps in Fig. 14 were ascribed to various sections RBS1, AS1, RS1, and FC1 of the control system CS1, these can be performed by any form of processor arrangement in the system SC1. The invention is not limited to this section arrangement nor this series of steps. The system CS1 may perform its function of combining the data and comparing it to the rules stored therein to obtain an action priority in any number of other ways.

While only two action control points and CDRPs appear in the drawings, it will be evident that other action control points may be part of the network, and each has a CDRP which communicates with the control system CS1.

According to an embodiment of the invention, the rules section RS1 of the control system CS1 distinguishes between calls that it can identify as possibly fraudulent from a single call, such as shown in boxes 334 and 410, and identifications that require a number of calls, such as hacking. The former are called single call events and the latter multiple calls events. The rules section RS1 then first attempts to match only vectors using data from the CDRPs with boxes having single call events. Thereafter, it scans and matches vectors with the data from both the CDRPs and the fraud intelligence unit FI1 with the remaining boxes.

In an embodiment, a different version of the rules in Fig. 10 is obtained by considering out of business hour calls. In those rules, if the calls come in from suspicious NPA-NXX, or pay phones (indicated by ii digits), the threshold will be lower (single call) for action priority H. Otherwise the action priority is at least as high as that for rules applying to business hour calls.

It will be noted that the control system CS1 is

This Sheet Has Been Replaced.



THIS SHEET HAS BEEN
REPLACED

connected to the fraud intelligence unit FI1 for querying the unit's database for information which is required during the fraud detection process. This connection is also used by the control system CS1 to enter and delete
5 information in the database of the fraud intelligence unit FI1, when fraud information which is obtained from detected events is saved for future use.

According to an embodiment the fraud events which are to be detected are expressed in the form of
10 Boolean rules. These rules are logical expressions each of which describes a particular fraud scenario. These rules describe certain basic characteristics of a fraud event or fraud vectors. The rules are executed logically in the control system processor, and if the outcome of a
15 rule is "true", then a corresponding fraud event has been detected. If false, there is no fraud event detected by that rule and the processor moves on to apply the next rule. This process runs continuously, to apply all the rules in the repertoire of the control system, for every
20 new X-record which is pumped into the RBS1 from the CDRPs RP1 and RP2.

According to an embodiment, in the received record buffer section RBS1, the records are arranged in a chronological scheme, the latest set being on the top and
25 the oldest set being dropped from the buffer at the bottom. The received record buffer section RBS1 holds about 4 hours worth of prefiltered records (X-records) and this serves as a form of short term historical data store.

In an embodiment of Fig. 2, the analysis section
30 AS1 uses the database of the fraud intelligence unit FI1 in the analysis process. It first examines an X-record from the received record buffer section RBS1 information element by information element, and determines its characteristics of fraud.

35 The X-records contain in general, a mix of

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

quantitative and qualitative information. In an embodiment, the latter are also expressed in the form of binary coded decimal digits, which encode the qualities. But, the fraud scenario rules are in terms of vectors.

5 Thus, the analysis section AS1 converts the quantitative and encoded qualitative information of the X-record into corresponding vectors.

In this embodiment, the method is based on two separate procedures. In the simplest of cases, a
10 quantitative value is compared against some threshold values (which are conveniently arranged to be adjustable), in a simple equation or inequality expression. For example, consider the information element called "call
15 duration" which is expressed in the record in terms of seconds. This needs to be vectorized to just two vectors, short and long. It is done in the following expression, which is executed during the analysis procedure.

If call duration $\leq$ t1 then short.
If call duration $\geq$ t2 then long.

20 The thresholds t1 and t2 are adjustable, which makes the definition of short and long relative.

In an embodiment, the analysis section AS1 reduces the information elements of an X-record to vectors in this rule based manner. For some others, especially
25 the telephone numbers, the analysis section AS1 refers to the fraud intelligence unit FI1 database in order to derive its vectors. For example, the analysis section may consider a typical originating number on an X-record. To determine if this is a PBX number, it queries the FIU if
30 this is on the list of suspected ANI's. It also determines if the originating number on the X-record is from a suspicious calling area from where a large number of fraud calls are made by referring to the FIU FI1. The

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

analysis unit AS1 obtains such information by a query to the fraud intelligence unit FI1 database. The information is found there, because it was entered there previously.

Further, it determines if the originating number
5 is a repeating originating number of many calls which have been made within the last 4 hours by searching through the record of the buffer section RBS1. It determines if this is "Using repeated ANI". The analysis unit AS1 derives this vector by matching the same originating number in
10 many of the records which are in the RBS1. If the number of occurrences exceed a threshold N1 it is significantly repeating. This search and match operation is carried out to obtain vectors which are needed before the rules for multiple call fraud events are applied.

15 Thus, in this embodiment, by repeated application of these steps to the information elements of the X-record, the analysis unit AS1 converts the records to vectors. In addition to the vectors, the analysis unit AS1 retains some of the information elements from the
20 original X-record as they are. These are:

- Record ID
- Call ID
- Toll Switch ID
- Originating number
- 25 - Dialed number
- Terminating number
- Authorization code.

These numbers are used in post detection actions of prevention, and record keeping procedures. These are
30 retained in addition to their vector forms. All others are used in their vector form only.

As stated, the rules section RS1 classifies fraud events into two classes called a single call event

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

and a multiple call event. The single call event requires the analysis of the information elements in the record of a single call only. For example, a record may bear the following information:

- 5 International call
- Call made from a PBX
- Long duration call
- Off-business hour call
- Terminating in a high fraud country.

10 This scenario does not need the information contained in any other records to declare that this record represents a fraud event. Figures 3 to 6 describe many scenarios of single call fraud events which the rules section RS1 includes in its repertoire.

15 Multiple call fraud events require the information carried on more than one record. The rule which describes such an event in the rules section RS1 will contain vectors which refer to characteristics which can only be derived from analyzing and comparing several

20 records.

 The rules section RS1 derives these characteristics by the analysis and comparison of many records. Figs. 7 to 12 contain examples of fraud scenarios of this class. In general, this class

25 represents the more difficult to detect fraud events. A 4 hour storage requirement of the RBS1 is used for the detection of this class of events. This chronological store of records allows the rules section RS1 to perform the required comparison among the collected records to

30 detect such events. However, records of time durations, such as 2 to 8 hours, may also be used.

 The rules depicted in the Fig. 13 cover a large number of rules of both these classes and enable the



detection system to be capable of detecting most of the commonly committed fraud acts. In the figure, the vectors of the rules are represented as a list implying that they all must be present concurrently to make the rule "true".

- 5 In other words, the "AND" designation of the boolean expression has been dropped. Additions and deletions to the rules may be made with ease to give high flexibility to the process.

- 10 To disconnect a call, the fraud containment section FC1 responds to the action priority from the rules section RS1 and sends a message to the signal transfer points STP1 and STP2. The section FC1 gives the identity of the switch and the call which originated there, along with a command which makes the switch operate as if the
15 call has been terminated by the called party. This causes the switch to disconnect the call and go through all the normal procedures which accompany the termination of a call. Thus the fraud caller will experience a hang-up in the middle of a call. If a second call from that
20 telephone is initiated, that call will be treated by blocking as for the case HHb.

- In the switch network TSN, signal transfer points STP respond to the fraud control section to operate on originating and terminating action control points ACPO
25 and ACPT which disconnect calls coming from an access demand source ADS and going to an egress EGR. In the switch network TSN, signal transfer points STP coact with network control points NCP to operate on originating and terminating action control points ACPO and ACPT which
30 block calls coming from an access demand source ADS and going to an egress EGR. Call data may pass directly between the originating access control points ACPO and ACPT and the fraud intelligence unit FI1.

- 35 The basic nature of the detection process which is employed is that of an expert system which employs

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

recognition of the various elemental characteristics of the phenomenon which is to be detected. It is rule-based and heuristic in nature, as opposed to mathematical methods based on statistical parameters and multi-
5 dimensional representations. The heuristic method of the invention, is very flexible, adaptable, and is not based on statistical studies of the fraud events. Natural neural systems, which are the result of millions of years evolution, are based on similar heuristic strategies, in
10 which the incoming information is filtered to obtain a finite set of characteristics and building up more complex composites from them, which act as templates for matching and final detection.

Short calls cannot be detected until after
15 termination. The CDRPs transmit short calls to the control system CS1 immediately after termination.

In an embodiment, the fraud intelligence unit includes a processor that organizes the database to deal with query and response from the control system CS1.

20 The information to the FIU FI1 is initially entered manually on the basis of prior fraud cases. To provide the fraud intelligence unit FU1 with further initial information, the control system CS1 is then set in a "training mode" before it is fully deployed. In this
25 mode, the control system is inhibited from executing any preventive actions, but freely detects fraud events. In this mode, it adds to the initial human input by pumping important intelligence data to the database of the fraud intelligence unit FI1. This data can be carefully
30 monitored and used for detection, when fully deployed. When fully deployed, the control system CS1 updates the database of the fraud intelligence unit FI1 with information on new fraud events.

To increase the flexibility of the detection
35 process, any information which is considered as

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

contributing to increase the certainty of detection can be stored in the fraud intelligence unit FI1 database and referred to at the time of analysis. No restrictions based on mathematical consistency need apply.

5 The Control System CS1 can be located centrally or in a distributed manner as one per switch office, according to the economics and performance requirements of the telephone switching network TSN. In either case, it is situated conveniently to collect call
10 detail records from all the toll switches of the telephone switching network TSN.

 In the embodiment of Fig. 1, the call detail records are arranged to be collected from the switches ACPO and ACPT via their CDRPs RP1 and RP2 and RP2. The
15 records are collected in real time, which means that the data about a call are available at the control system CS1 while the call is still in progress. Continuous elapsed time data is made available for calls which are in progress. In the case of very short calls the data on the
20 calls are collected immediately thereafter.

 From a very high level point of view, the main functions of the control system CS1 are to:

- (1) detect fraud events by analyzing call records,
- (2) execute actions as indicated by action
25 priorities, and
- (3) communicate as needed with the CDRPs, the database of the fraud intelligence unit FI1, and the corporate security administration monitor CSAM.

30 The real-time operating system of the control system CS1 performs the first two functions in a cyclic fashion and the third one on a on-demand or needed basis. The detection, the execution of actions, and the presentation of information to the corporate security
35 administration monitor CSAM takes place in a cyclic

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

fashion, whereas the CDRPs RP1 and RP2 and RP2 and the corporate security administration monitor CSAM are serviced as they interrupt the control system CS1 with a demand for service. The control system CS1 will query the
5 database of the fraud intelligence unit FI1, as required in the analysis of the call detail information contained in the call records, during the detection process.

In Figs. 3 to 13, the rules are arranged in a pyramidal fashion, moving from a very general scenario to
10 more and more defined and restrictive scenarios. The more restricted the scenario is, the higher is the detection certainty that the event is fraudulent.

In an embodiment, to block a call, the fraud containment section FC1 responds to the action priority
15 from the rules section RS1 and sends a special message to the signal transfer point STP1. The message contains a command to block the next call from a specified ANI. The STP signal transfer point STP1 will distribute this command to the correct Network Control Point NCP, which
20 handles the call processing of all business service calls. The network control point NCP will then, divert the call to a ring busy terminal, which will frustrate the caller's attempt to use the network.

In step 1437, the fraud containment section FC1
25 acts to disconnect the caller and block the next call from the caller. According to an embodiment of the invention, the next call is not blocked.

According to an embodiment of the invention, the FIU FI1 contains a processor which performs the matching
30 functions with data from the analysis section AS1.

While embodiments of the invention have been described in detail, it will be evident to those skilled in the art that the invention may be embodied otherwise without departing from its scope.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



Claims:

1. The method of controlling access of a user to a resource, comprising:

storing, in a control data base, a set of
5 attributes concerning an access from an access demand source;

maintaining a rules data base of rules concerning attributes for determining corrective action;
determining whether data the control data base
10 matches the rules in the rules data base; and
effecting corrective action by disconnecting the access during access time in response to a match between data in the control data base and data in the rules data base.

15 2. A method as in claim 1, wherein storing in the control data base includes storing in a first access data base a first set of attributes concerning the ongoing access.

20 3. A method as in claim 2, wherein storing in the control data base includes storing in a second access data base a second set of attributes concerning the history of prior accesses made by the access demand source;

the step of determining whether data the access
25 data base matches the rules in the rules data base includes determining whether to disconnect the access, block future accesses, or take other action; and

the step of effecting corrective action includes disconnecting the access, blocking future accesses, or
30 taking other action.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



4. A method as in claim 3, wherein said step of storing data in said second access data base includes storing one of the following:

- PBX ANIs (Private Branch Exchange Automatic Number Identifications),
- 5 — University PBX's and Centrex's,
- Suspicious NPAs-NXX for originating numbers,
- Suspicious terminating numbers,
- Known bad ANIs,
- Suspicious country codes,
- 10 — Forbidden country codes,
- Compromised Authorization Codes,
- ANI's from detected fraud events,
- Originating numbers from detected fraud events,
- Terminating numbers from detected fraud events,
- 15 — Authorization codes from detected fraud events,
- Other files as required by CSAM (Telephone Corporation Security Administration Monitor).

5. A method as in claim 3 or claim 4, wherein the step of storing in the second access data base includes updating the second access data base with data
20 from accesses having matches in the determining step.

6. A method as in claim 5, wherein the step of storing in the second access data base includes updating the second access data base with data from accesses having matches in the determining step.

7. A method as in any of claims 2-6, wherein said storage in said first
25 access data base includes storing one or more of the following attributes:

- requesting user
- request time
- length of use
- destination requested
- 30 user authorization code
- whether use request is cellular.

This Sheet Has Been Replaced



8. A method as in any of the preceding claims, wherein the data in said

THIS SHEET HAS BEEN
REPLACED



rules data base includes access demands made:

- During business hours,
- During non-business hours,
- Excessively long,
- 5 — Domestic accesses,
- To a limited dialed MPA = 800,
- To a termination number = CPE,
- To a country code,
- ANI = CPE (Automatic Number Identification with Customer Premises
- 10 Equipment),
- Accesses using SDN-NRA (Software Defined Network — Network Remote Access),
- To a suspected country code,
- Using a bad ANI,
- 15 — Of short duration,
- Using repeated ANI,
- From non-frequent accessor,
- To successive different dialed numbers, Using suspected patterned dialing,
- 20 — With a connect time difference using a less than PDD (Post Dialing Delay) +e, i.e. going from one number to another quickly,
- Using an invalid authorization code,
- With a number of accesses in repeat set greater than threshold,
- Using a SDN (Software Defined Network) virtual private network,
- 25 — Using different ANI to same termination No.,
- Using the same authorization code from another location greater than at least one access continuing,
- Having greater than access duration overlap,
- With simultaneous use of mobile number,
- 30 — Cellular,
- Of the same MIN,
- Using distance between access locations/elapsed time greater than a given value τ ,
- Multiple accesses from same ANI (Automatic Number Identification)
- 35 greater than x,
- Repeated dialed numbers,

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



- Terminating at a number which is a known DISA/RMATS (Direct Inward Switched Access/Remote Maintained Access Test System Maintained Port),
- Originating in suspect MPA-NXX or pay-phone,
- 5 — Multiple accesses from same ANI,
- CPE (Customer Premise Equipment) to a known high fraud country,
- CPE (Customer Premise Equipment) to a known medium fraud country,
- Non CPE type of service,
- 10 — Suspicious terminating number,
- Multiple accesses billed to same number,
- Multiple 800 accesses exceeding preset number.

9. A system controlling access of a user to a resource, comprising:
a control data base with a set of attributes concerning an ongoing access
15 from an access demand source;
rules data base with rules concerning attributes for determining corrective action;
means for determining whether data in the control data base matches the rules in the rules data base; and
20 means for effecting corrective action by disconnecting the access during access time in response to a match between data in the control data base and data in the rules data base.

10. A system as in claim 9, wherein said control data base includes a first access data base with a first set of attributes concerning the ongoing access.

- 25 11. A system as in claim 10, wherein the control data base includes a second access data base with a second set of attributes concerning the history of prior accesses made by the access demand source;
the means for determining whether data in the access data base matches the rules in the rules data base includes means for determining whether to disconnect
30 the access, block future accesses, or take other action; and
the means for effecting corrective action includes means for disconnecting the access, blocking future accesses, or taking other action.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



12. A system as in claim 11, wherein said second access data base includes data on one of the following:

- PBX ANIs (Private Branch Exchange Automatic Number Identifications),
- 5 — University PBX's and Centrex's,
- Suspicious NPAs-NXX for originating numbers,
- Suspicious terminating numbers,
- Known bad ANIs,
- Suspicious country codes,
- 10 — Forbidden country codes,
- Compromised Authorization Codes,
- ANI's from detected fraud events,
- Originating numbers from detected fraud events,
- Terminating numbers from detected fraud events,
- 15 — Authorization codes from detected fraud events,
- Other files as required by CSAM (Telephone Corporation Security Administration Monitor).

13. A system as in claim 11 or claim 12, wherein the control data base includes means for updating the second access data base with data from accesses
20 having matches in the means for determining.

14. A system as in claim 13, wherein the control data base includes means for updating the second access data base with data from accesses having matches in the means for determining.

15. A system as in any of claims 10 to 14, wherein said storage in said
25 first access data base includes storage for one or more of the following attributes:
requesting user
request time
length of use
destination requested
30 user authorization code

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



whether use request is cellular.

16. A system as in any of claims 9 to 15, wherein rules data base includes storage of access demands made:

- During business hours,
- 5 — During non-business hours,
- Excessively long,
- Domestic accesses,
- To a limited dialed MPA = 800,
- To a termination number = CPE,
- 10 — To a country code,
- ANI = CPE (Automatic Number Identification with Customer Premises Equipment),
- Accesses using SDN-NRA (Software Defined Network — Network Remote Access),
- 15 — To a suspected country code,
- Using a bad ANI,
- Of short duration,
- Using repeated ANI,
- From non-frequent accessor,
- 20 — To successive different dialed numbers, Using suspected patterned dialing,
- With a connect time difference using a less than PDD (Post Dialing Delay) +e, i.e. going from one number to another quickly,
- Using an invalid authorization code,
- 25 — With a number of accesses in repeat set greater than threshold,
- Using a SDN (Software Defined Network) virtual private network,
- Using different ANI to same termination No.,
- Using the same authorization code from another location greater than at least one access continuing,
- 30 — Having greater than access duration overlap,
- With simultaneous use of mobile number,
- Cellular,
- Of the same MIN,
- Using distance between access locations/elapsed time greater than a
- 35 given value τ ,

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

- Multiple accesses from same ANI (Automatic Number Identification) greater than x,
- Repeated dialed numbers,
- Terminating at a number which is a known DISA/RMATS (Direct
5 Inward Switched Access/Remote Maintained Access Test System Maintained Port),
- Originating in suspect MPA-NXX or pay-phone,
- Multiple accesses from same ANI,
- CPE (Customer Premise Equipment) to a known high fraud country,
- 10 — CPE (Customer Premise Equipment) to a known medium fraud country,
- Non CPE type of service,
- Suspicious terminating number,
- Multiple accesses billed to same number,
- 15 — Multiple 800 accesses exceeding preset number.



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

RESOURCE ACCESS CONTROL SYSTEM

ABSTRACT


Access of a user to a resource, such as a telecommunications network, includes storing, in a first call data base, a first set of attributes concerning an ongoing call from a caller. A second call data base stores a second set of attributes concerning the history of prior calls made by the caller. A rules data base stores rules concerning attributes for determining whether to disconnect the call, block future calls, or take other action. A determination is made whether data in at least one of the call data bases matches the rules in the rules data base. The call is then disconnected, the next call blocked, or other action is taken, in response to a match between data the call data bases and data in the rules data base. Preferably, the second call data base is updated in response to matches with the rules data base.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

FIG. 2

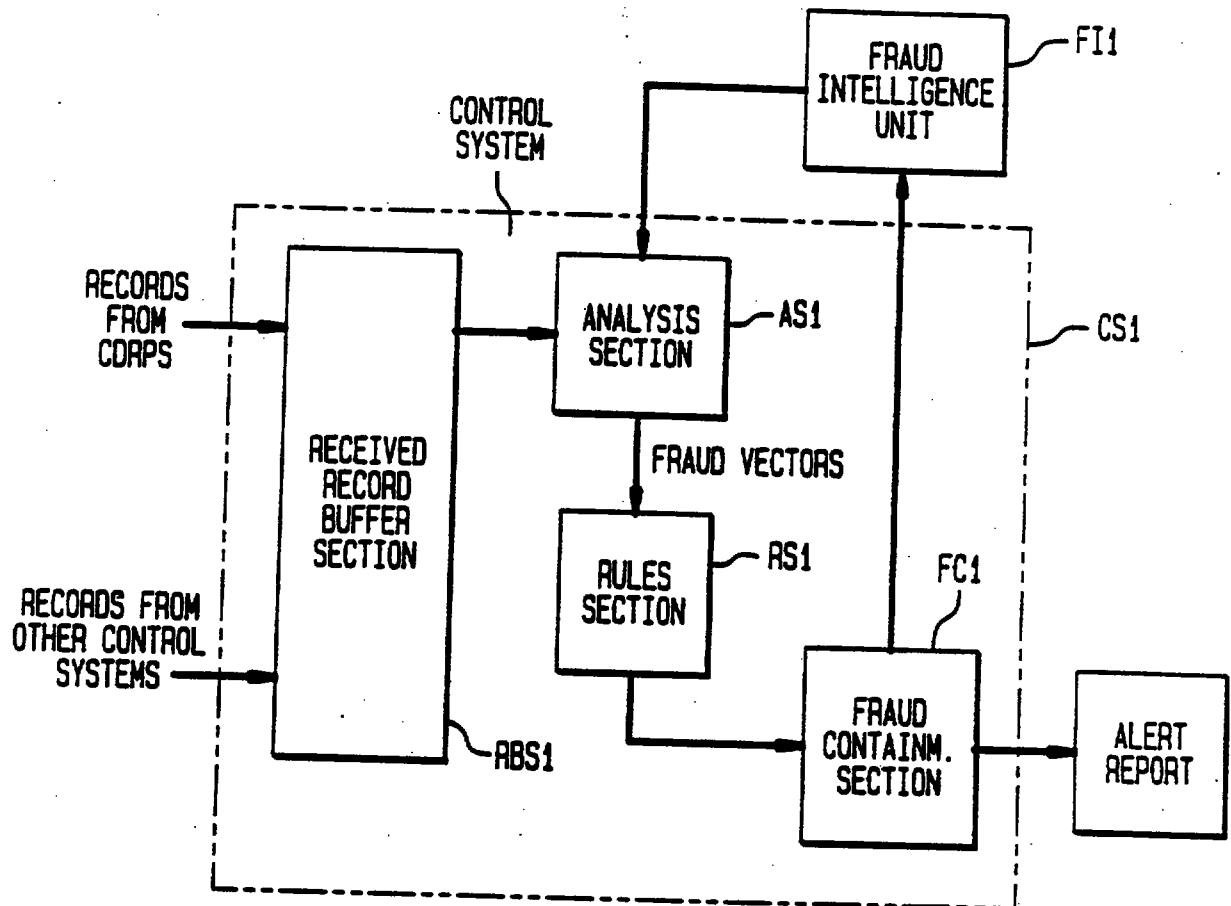

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

3/11

This Sheet Has Been Replaced



FIG. 3

CHARACTERISTICS	ACTION PRIORITY	
NON. BUS. HRS. LONG INTERNATIONAL	L	310
NON. BUS. HRS. LONG DOMESTIC	L	314
NON. BUS. HRS. LONG DIALED NPA = 800	L	317
NON. BUS. HRS. LONG DIALED NPA = 800 TERMINATION # = CPE (ADD EXCLUSION)	L	320
NON. BUS. HRS. LONG DIALED NPA = 800 TERMINATION # = CPE II DIGITS (COCOTS = 07)	M	324
NON. BUS. HRS. LONG INTERNATIONAL BAD ANI (GET THE LIST FROM CASE MGMT)	M	327
NON. BUS. HRS. LONG INTERNATIONAL SUSP. ANI_NPA-NXX)	L	330
NON. BUS. HRS. LONG INTERNATIONAL ANI = CPE FORBIDDEN CC (CUST. DOESN'T ALLOW)	HHa	334
NON. BUS. HRS. LONG INTERNATIONAL ANI = CPE SUSP. CC (OR NOT CALLED BEFORE)	M, L	337

THIS SHEET HAS BEEN
REPLACED

4/11

FIG. 4

CHARACTERISTICS	ACTION PRIORITY	
REG. BUS. HRS. LONG INTERNATIONAL ANI = CPE FORBIDDEN CC (CUST. DOESN'T ALLOW)	HHa	410
REG. BUS. HRS. LONG INTERNATIONAL ANI = CPE SUSP. CC (OR NOT CALLED BEFORE)	M, L	414

FIG. 5

CHARACTERISTICS	ACTION PRIORITY	
REG. BUS. HRS. LONG INTERNATIONAL SDN-NRA FORBIDDEN CC	HHa	510
REG. BUS. HRS. LONG INTERNATIONAL SUSP. ANI-NPA-NXX SDN-NRA SUSP. CC	H	514
REG. BUS. HRS. LONG INTERNATIONAL BAD ANI SDN-NRA	M	517
REG. BUS. HRS. LONG INTERNATIONAL BAD ANI SDN-NRA SUSP. CC	HH	520
NON. BUS. HRS. LONG SDN-NRA ACCESS OFF-NET DOMESTIC SUSP. ANI-NPA-NXX	L	524

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

5/11

FIG. 6

CHARACTERISTICS	ACTION PRIORITY
SINGLE CALL EVENTS WITH CELLULAR CALLS.	
LONG CELLULAR INTERNATIONAL	L 610
LONG CELLULAR TERM # = CPE	M 614
LONG CELLULAR INTERNATIONAL SDN	M 617

FIG. 7

CHARACTERISTICS	ACTION PRIORITY
SHORT REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIFFERENT DIALED #	L 710
SHORT NON. BUS. HRS. REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIFFERENT DIALED # SUSP. ANI NPA-NXX	H 714
SHORT REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIALED NXX-XXXX PATTERNED	H 717

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

6/11

FIG. 8

CHARACTERISTICS	ACTION PRIORITY	
SHORT NON. BUS. HRS. REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIALED # PATTERNED SUSP. ANI NPA-NXX	HHb	810
SHORT REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 CONNECT TIME DIFFERENCE $\leq$ PDD + e (THIS IS COMPUTER HACKING SCENARIO)	H	814
HACKING FOR AUTHORIZATION CODE (AC)		817
SHORT REPEAT ANI NOT FREQUENT CALLER REPEAT 800 DIALED NUMBER (ACCESS) INVALID AC	H	820
SHORT REPEAT ANI NOT FREQUENT CALLER REPEAT 800 DIALED NUMBER (ACCESS) PATTERNED AC	HHb	824
ANI LOCKOUT FEATURE OF SDN THIS IS A CURRENTLY OFFERED SDN FRAUD PROTECTION FEATURE		827
SHORT REPEAT ANI NOT FREQUENT CALLER REPEAT 800 DIALED NUMBER (ACCESS) INVALID AC NUMBER OF CALLS IN REPEAT SET $\geq$ THRESHOLD	HHb	830

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

7/11

FIG. 9

CHARACTERISTICS	ACTION PRIORITY	
SIMULTANEITY OF CODES, MINS, ETC		910
SDN DIFFERENT ANI SAME AC > AT LEAST ONE CALL CONTINUING > (THIS FOR IN PROG CALLS AS IN KBS NETWORK) CALL DURATION OVERLAP (THIS FOR NetEXPERT)	Htb	914
SDN CELLULAR SAME MIN > AT LEAST ONE CALL CONTINUING > (THIS FOR IN PROG CALLS AS IN KBS NETWORK) CALL DURATION OVERLAP (THIS FOR NetEXPERT)	Htb	917
GEOGRAPHIC REASONABLENESS		920
CELLULAR MULTIPLE CALLS SAME MIN (DIST. BETWEEN CALL ORIG. LOCATIONS) / (ELAPSED TIME) >= THRESHOLD	Htb	924

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

8/11

FIG. 10

CHARACTERISTICS	ACTION PRIORITY	
LONG BUSINESS HOURS MULTIPLE CALLS (THRESHOLD TBD) SINGLE ANI ORIGINATING 800 OR I/800 CALLS SAME DIALED NUMBER TERMINATING NUMBER NOT KNOWN TO BE DISA/RMATS	M	1010
LONG BUSINESS HOURS MULTIPLE CALLS (≥ 5 PER HR. SUGG. THRESHOLD) MULTIPLE ANI ORIGINATING 800 OR I/800 CALLS SAME DIALED NUMBER TERMINATING NUMBER NOT KNOWN TO BE DISA/RMATS	M	1014
LONG BUSINESS HOURS MULTIPLE CALLS (≥ 5) SINGLE ANI ORIGINATING OR MULT. ANI ORIGINATING 800 OR I/800 CALLS SAME DIALED NUMBER TERMINATING NUMBER KNOWN DISA/RMATS	H	1017
LONG BUSINESS HOURS MULTIPLE CALLS (≥ 2) SINGLE ANI ORIGINATING OR MULT. ANI ORIGINATING 800 OR I/800 CALLS ORIGINATING IN SUSP. NPA-NXX OR PAYPHONE (INDICATED BY ii DIGITS = 07) SAME DIALED NUMBER TERMINATING NUMBER KNOWN DISA/RMATS OR NOT KNOWN	H	1020

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

9/11

FIG. 11

CHARACTERISTICS	ACTION PRIORITY	
LONG BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI KNOWN CPE OF CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THE THRESHOLD - NUMBER OF CALLS - IS COUNTRY SPECIFIC)	H	1110
LONG BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI NON CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THE THRESHOLD IS COUNTRY SPECIFIC)	M	1114
LONG OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI KNOWN CPE OR CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THRESHOLD IS COUNTRY SPECIFIC AND LOWER THAN THE THRESHOLD FOR THE CORRESPONDING RULE FOR BUSINESS HOURS CALLS)	H	1117
LONG OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI NON CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THRESHOLD IS COUNTRY SPECIFIC AND LOWER THAN THE THRESHOLD FOR THE CORRESPONDING RULE FOR BUSINESS HOURS CALLS)	M	1120

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

10/11

FIG. 12

CHARACTERISTICS	ACTION PRIORITY	
LONG BUSINESS HOURS OR OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI CPE TYPE OF SERVICE OR KNOWN CPE DOMESTIC CALL SUSPICIOUS TERM. NO (BULLETIN BOARD, ETC. FROM NEGATIVE DATABASE OF TERM. NUMBERS)	H	1210
LONG BUSINESS HOURS OR OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI NON-CPE TYPE OF SERVICE DOMESTIC CALL SUSPICIOUS TERM. NO. (FROM NEGATIVE DATABASE OF TERMINATING NUMBERS)	L	1214

FIG. 13

CHARACTERISTICS	ACTION PRIORITY	
MULTIPLE CALLS (≥ 5) BILLED TO SAME NUMBER INTERNATIONAL CALLS HIGH OR MEDIUM FRAUD COUNTRY	H	1310
MULTIPLE COLLECT CALLS (≥ 5) TERMINATING AT SAME NUMBER INTERNATIONAL CALLS HIGH OR MEDIUM FRAUD COUNTRY	M	1314
MULTIPLE 1-800-ATT CALLS (≥ 5) FROM SAME ANI INTERNATIONAL CALLS HIGH OR MEDIUM FRAUD COUNTRY	H	1317
MULTIPLE CALLS (≥ 5) FROM SAME ANI ANI IN SUSPICIOUS NPA-NXXX BILL TO CARDS (SAME OR DIFFERENT) (0 + REPORT) SAME TERMINATING NUMBER TERMINATING NUMBER KNOWN DISA/RMATS	M	1320

This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED




11/11

FIG. 14

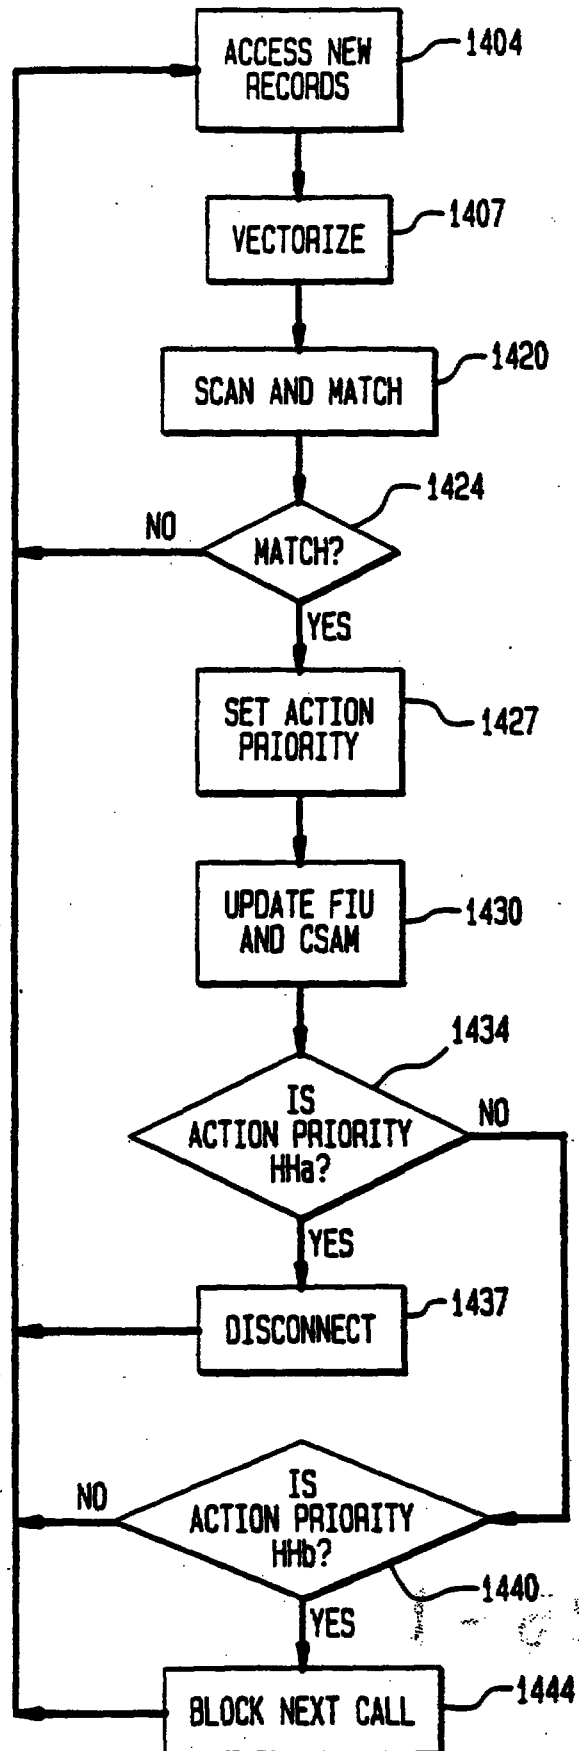



RESOURCE ACCESS CONTROL SYSTEM



FIELD OF THE INVENTION


This invention relates to preventing fraudulent access to a resource, and particularly to methods and means for blocking or disconnecting telephone calls, in real time, from callers that are attempting to gain fraudulent access to telephone networks.

BACKGROUND OF THE INVENTION

Fraudulent telephone calls are a major source of revenue loss to telephone service providers. They also result in customer dissatisfaction when tolls are inadvertently charged to the subscriber as a result of fraudulently placed calls. Present systems use batch mode analysis of call details and sometimes manage to detect some types of fraud. This arrangement requires the telephone company to communicate with the culprit to end the abuse. It entails a delay in the prevention of fraud.

An object of the invention is to overcome the disadvantages of prior systems.

Another object of the invention is to detect and

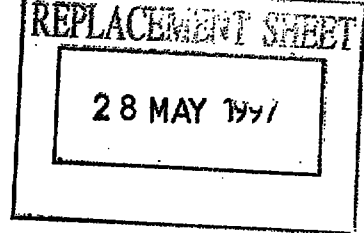

- 2 -

block or disconnect fraudulent access demands in real time.

SUMMARY OF THE INVENTION

According to a feature of the invention, these objects are attained by storing, in a control data base, a set of attributes concerning an access from an access demand source; maintaining a rules data base of rules concerning attributes for determining corrective action; determining whether data the control data base matches the rules in the rules data base; and effecting corrective action by disconnecting the access during access time in response to a match between data in the control data base and data in the rules data base.


According to another feature of the invention. storing in the control data base includes storing in a first access data base a first set of attributes concerning the ongoing access.

According to another feature of the invention, storing in the control data base includes storing in a second access data base a second set of attributes concerning the history of prior accesses made by the access demand source; the step of determining whether data the access data base matches the rules in the rules data base includes determining whether to disconnect the access, block future accesses, or take other action; and the step of effecting corrective action includes disconnecting the access, blocking future accesses, or taking other action.

According to another feature of the invention, the second access data base is updated on the basis of the matches.

These and other features of the invention are pointed out in the claims. Other objects and advantages of the invention will be evident from the following

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

28 MAY 1997

- 3 -

detailed description when read in light of the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a telephone network embodying features of the invention.

Fig. 2 block diagram of a control system in the network of Fig. 1 according to an aspect of the invention.

Figs. 3 and 4 show the rules for operation of the network and system in Figs. 1 and 2 for CPE fraud according to an aspect of the invention.

Figs. 5 and 6 show the rules for operation of the network and control system in Figs. 1 and 2 for CPE fraud according to an aspect of the invention.

Figs. 7 and 8 show the rules for fraud involving hacking to remote access ports of CPE (Customer Premises Equipment) and SDN-NRA (Software Defined Network - Network Remote Access) according to an aspect of the invention.

Fig. 9 shows the rules to detect fraud involving multiple calls with the same SDN code or cellular MIN, and successive cellular calls with far apart originating locations from the same caller according to an aspect of the invention.

Figs. 10 to 12 shows the rules for multiple calls likely to be actual fraud calls through the CPE according to an aspect of the invention.

Fig. 13 shows rules for detecting various kinds of miscellaneous fraud according to an aspect of the invention.

Fig. 14 is a flow chart illustrating operation of the system in Figs. 1 and 2.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Fig. 1 illustrates an arrangement embodying features of the invention. Here, a telephone switch

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

28 MAY 1997

- 4 -

network TSN connects a caller, or access demand source, ADS to a called party or egress EGR through two switches or central offices, namely, an originating action control point ACPO and a terminating action control point ACPT. The originating action control point ACPO and the termination action control point ACPT communicate with call detail recording platforms (CDRPs) RP1 and RP2 to supply the latter continuously with call detail records on a real-time basis. The action control points ACPO and ACPT generate these records for billing and record keeping by the CDRPs.

The CDRPs RP1 and RP2 also communicates with a control system CS1 which taps into the event message stream in the CDRPs RP1 and RP2 on a real-time on-demand basis. This means that the data is available to the control system CS1 while the call is going on. The control system CS1 analyzes the information elements which are contained in the CDRPs RP1 and RP2, as part of the detection of fraud events. In one embodiment of the invention, the control system CS1 accesses the data on all calls in the CDRPs RP1 and RP2. According to a preferred embodiment the control system CS1 accesses, from the CDRPs RP1 and RP2 only data for particular types of calls likely to produce significant fraud costs, namely:

- Calls which are very short duration (<10 sec)
These are interesting because these may be generated by automatic hacking devices.
- Calls which are very long duration (>20 min).
- International calls.
- Calls placed on business customer's equipments and on business communication services. (Fraud call charges are billed mostly to business customers.)

This Sheet Has Been ReplacedTHIS SHEET HAS BEEN
REPLACED

28 MAY 1997

- 5 -

Limiting the access to calls of this sort, eliminates the bulk of telephone calls from scrutiny by the control system CS1. These eliminated calls are normal calls which have a very low probability of incidence of fraud. When such incidences do occur, the loss to the network is small because they tend to be short distance domestic calls of short duration. This prefiltering, selects only calls which have an economically significant fraud cost to the network for transmission from the CDRPs RP1 and RP2 to the control system CS1.

According to one embodiment of the invention, the CDRPs RP1 and RP2 perform the selection, i.e. prefiltering, and according to another embodiment, the control system CS1 performs the prefiltering. In the latter embodiment, the CDRPs RP1 and RP2 accumulate the prefiltered records of all the calls which are being originating and progressing through all the toll switches of the area served by it for a small and convenient interval, say 15 seconds and sends the set to the control system CS1. The data on the prefiltered calls sent to the control system CS1 are herein called X-records.

The control system CS1 also exchanges data with a fraud intelligence unit (FIU) FI1, a telephone company corporate security administration monitor (CSAM) CSA1, and other control systems. The fraud intelligence unit FI1 has a database which stores "historic" information which is used for reference, to decide whether an information element on a record is significant for fraud detection or not.

According to an embodiment of the invention, the database of the fraud intelligence unit FI1 stores the following information:

-PBX ANIs (Private Branch Exchange Automatic Number Identifications).

This Sheet Has Been ReplacedTHIS SHEET HAS BEEN
REPLACED

- 6 -

- University PBX's and Centrex's.
 - Suspicious NPAs-NXX for originating numbers.
 - Suspicious Terminating Numbers.
 - Suspicious Country codes.
 - Forbidden country codes.
 - Compromised Authorization Codes.
 - ANI's from detected fraud events.
 - Originating numbers from detected fraud events.
 - Terminating numbers from detected fraud events.
 - Authorization codes from detected fraud events.
 - Other optional files entered manually by CSAM
- CSA1

In other embodiments, the FIU FI1 contains other information.

Fig. 2 is a block diagram of the control system CS1 in Fig. 1. The control system CS1 is preferably in the form of a single processor which performs its various functions. Fig. 2 shows the control system as composed of individual sections, namely a received record buffer section RBS1, an analysis section AS1, a rules section RS1, and a fraud containment section FC1. However, each of the blocks preferably represents a function of the processor, rather than an individual unit, and the processor may perform all the functions with the same hardware. Nevertheless, according to an embodiment of the invention, any or all the blocks may be a separate section or unit. The blocks in the control system CS1 are referred to as sections for convenience.

The control system CS1 accesses the data from the CDRPs RP1 and RP2 and the fraud intelligence unit FI1 and matches the accessed data with a set of rules which the control system stores. The rules appear in Figs. 3 to 13 and define the existence of various levels of fraud events such as HHa, HHb, HH, H, M, and L. If the data

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

matches a high level HHa, the control system CS1 signals the signal transfer point STP1 to disconnect the ongoing call. If the level is HHb, it signals the signal transfer point STP1 to block the next call from the access source ADS.

The control system CS1 also transfers information about detected fraud events to the CSAM CSA1 to raise alarm signals so that the network personnel can take appropriate manual control. Such manual operation may override the control system CS1 and disconnect selected calls or block selected calls, or to inhibit the disconnect or blocking action of the control system CS1. The CSAM CSA1 can also enter new information into the fraud intelligence unit FI1 database.

In Fig. 2, the control system CS1 receives the set of records from the CDRPs RP1 and RP2 and enters it to the received records buffer section RBS1. The analysis section AS1 receives the data from the buffer section RBS1 and uses the data from the fraud intelligence unit FI1 to derive vectors each of which conforms to a data element or characteristic in the rules in Figs. 3 to 13. In other words, in order to match the data to the rules, the data must be in the format of each of the elements or characteristics of the rules. Accordingly, the analysis section AS1 vectors which specify whether a call is:

- During business hours.
- During non-business hours.
- Excessively long.
- Domestic calls.
- To a limited dialed NPA = 800.
- To a termination number = CPE.
- To a country code.
- ANI = CPE (Automatic Number Identification with Customer Premises Equipment).

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

28 MAY 1997

- 8 -

- Using SDN-NRA (Software Defined Network - Network Remote Access).
- To a suspected country code.
- Using a bad ANI.
- Of short duration.
- Using repeated ANI.
- From non-frequent caller.
- To successive different dialed numbers.
Using suspected patterned dialing.
- With a connect time difference using a less than PDD (Post Dialing Delay) + e, i.e. going from one to another number quickly.
- Using an invalid authorization code.
- With a number of calls in repeat set greater than threshold.
- Using a SDN Software defined network (virtual private network).
- Using different ANI to same termination No.
- Using the same authorization code from another location greater than at least one call continuing.
- Having greater than call duration overlap.
- With simultaneous use of mobile number.
- Cellular.
- Of the same MIN (Mobile Identification Unit).
- Using distance between call locations/elapsed time greater than a given value τ .
- Multiple calls from same ANI (Automatic Number Identification) greater than x.
- Repeated dialed numbers.
- Terminating at a number which is a known DISA/RMATS (Direct Inward Switched Access/Remote Maintained Access Test System Maintained Port).
- Originating in suspect NPA-NXX or pay phone.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

28 MAY 1997

- 9 -

- Multiple calls from same ANI.
- CPE (Customer Premise Equipment) to a Known high fraud country.
- CPE (Customer Premise Equipment) to known medium fraud country.
- Non CPE type of service.
- Suspicious terminating number.
- Multiple calls billed to same number.
- Multiple 800 calls exceeding preset number.

It will be understood that other vectors may be derived, and that the above list is by no means inclusive of all vectors possible. Other embodiments do not use all the aforementioned vectors.

Some of these vectors deal with quantitative values such as whether a call is short or long. The analysis section AS1, in deriving the vectors, compares each quantitative value with a threshold to produce a vector that indicates a high or low quantity such as a long call or short call. The thresholds may be varied manually or automatically with the time of day, time of the month, or other circumstances, to change the criticality of the data.

The rules section RS1 stores the rules in Fig. 3 to 13 in the form of a look-up table. Each horizontal box in Figs. 3 to 13 is a rule. In each box, the left side lists elements corresponding to vectors and the right side of each box indicates the action priority associated with the elements in the left side. The section RS1 of the processor scans the set of characteristics or vectors of a particular call and compares all the vectors with each of the rules in the boxes in Figs. 3 to 13. It determines if the vectors of a call matches a rule.

In Figs. 3 to 13, each rule is associated with a letter designation representing an action priority, such

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

as HHa, HHb, H, M, and L. Action priorities are L for low, M for medium, H for high, HHa and HHb for very high. These designations represent the action categories which the control system CS1 would execute, if the rule became "true". They depend upon the seriousness and the certainty of detection.

If any set of the vectors matches all the elements in a rule, the rules section RS1 designates the particular action priority indicated in the rule. Various different calls may have vectors which satisfy several rules.

HHa and HHb are the categories that represents the highest priority of the action categories. In this case, it is considered that the detected event is certain to be fraudulent and automatic action to prevent the incident is taken by the control system. If the fraud event is that of a hacker's attempt to break into the toll network, then the preventive action is to block his next attempt by diverting it to a ring busy terminal. This action is signified by the action priority being HHb. If the action priority is HHa, then the solution is to disconnect the call which is in progress.

The fraud containment section FC1 responds to the rules section RSI and sends out an alert report to the CSAM CSA1 and the FIU FI1 with respect to all the action priorities. If the action priority is HHb, it instructs the signal transfer points STP1 and STP2 to hold that information in a network control point NCP which handles the call processing of service calls. The latter then blocks succeeding calls from the same caller for a specific time. It does this by diverting the call to a ring busy terminal.

If the action priority is HHa the fraud containment section FC1 instructs the signal transfer point STP1 and STP2 to make the originating action control

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

28 MAY 1997

- 11 -

point ACPO or the terminating action control point ACPT disconnect or otherwise disable the call. This causes the switch to disconnect the call. Thus the fraud caller will experience a hang-up in the middle of a call. If successive calls within a predetermined time period arrive from that telephone, that call will be treated by blocking as for action priority HHb.

An action priority H carries the detection of a fraud event which is of slightly lower certainty but nevertheless, needs immediate attention. The fraud control section FC1, in this case, calls for a human decision to execute prevention action. Such action is initiated from the corporate security administration monitor CSAM by sending special command which may result in the same actions as described above.

An action priority M indicates a further grade of less certainty of detection and the action treatments similar to that of H except that the human decision to take preventive action can be more deliberate and calculated to take many other aspects of the case, deriving from intelligence which are not available to the machine.

Action priority L is the lowest category. Preventive action is again human initiated, but is expected to be very infrequent for this category.

For all these categories, the fraud control section FC1 enters the following information from the call record to the fraud intelligence database.

- Originating number
- Dialed number
- Terminating number
- Authorization Code used
- Action priority

This Sheet Has Been ReplacedTHIS SHEET HAS BEEN
REPLACED

28 MAY 1997

- 12 -

The fraud intelligence database FI1 stores this information for future calls. It bestows a capability of learning from experience to an otherwise mechanical rule-based system. The CSAM CS1 can constantly edit and monitor the intelligence thus collected via human supervision to prevent the detection process being corrupted by the uncontrolled growth of obsolete information.

The rules in Figs. 3 and 4, boxes 310 to 414 deal with CPE fraud. Here, boxes 334 and 410 result in HHa action priorities.

The rules in Figs. 5 and 6, boxes 510 to 524 and 610 to 617 deal with the possibility of cellular fraud or SDN-NRA (Software Defined Network - Network Remote Access) fraud. Here, for example, in the matches of 520, a long SDN-NRA international call during regular business hours using a bad ANI and suspected country code results in an HH (higher H) action priority. Matches at boxes 510 and 514 result in high action priorities whereas matches at boxes 517, 524, 610, 614, and 617 produce low or medium action priorities.

Figs. 7 to 13 deal mainly with multiple call events. These fraud scenarios require the characteristics contained in a number of records of the recent past. In one embodiment of the invention, the rules in these figures are implemented with individual thresholds for each rule. Figs. 7 and 8 deal specifically with fraud involving hacking to remote access ports of CPE (Customer Premises Equipment) and SDN-NRA (Software Defined Network - Network Remote Access). The rules in Fig. 9 detect fraud situations involving multiple calls where the same SDN authorization code or cellular MIN may be used, as well as successive cellular calls where the originating locations are too far apart to be originated by the same caller.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

28 MAY 1997

- 13 -

Figs. 10 to 12 shows the rules that apply to multiple calls when the calls are likely to be actual fraud calls through the CPE (Customer Premises Equipment). Figs. 11 and 12 show the rules for detecting the outgoing leg of actual fraud calls being perpetrated, possibly by call sellers.

Fig. 13 shows rules for detecting various kinds of miscellaneous fraud, e.g. third party fraud, collect call fraud, and card fraud to bypass 800 numbers blocks from pay phones.

As is evident, boxes 334, 410, and 510 ordain action priority HHa which result, according to an embodiment of the invention, in fraud containment section FC1 signalling to disconnect the ongoing call and, according to an embodiment, to block the next immediate call if it comes from the same caller. Boxes 810, 824, 830, 914, 917, and 924 cause the rules section RS1 via fraud containment section FC1 to signal blocking of succeeding calls which come from the same caller and have characteristics having action priority HHb.

Fig. 14 is a flow chart showing operation of the control system CS1 in Figs. 1 and 2. In Fig. 14, step 1404, the control circuit CS1 accesses new records from the CDRPs RP1 and RP2 and from the fraud intelligence unit FI1. The received-record buffer section RBS1 in the control system CS1 accesses and stores prefiltered records from the CDRPs RP1 and RP2 and other control systems CS1 at other locations and removes the oldest data if the buffer is full. The analysis section stores the data from the fraud intelligence unit FI1.

In step 1407, the analysis section AS1 in the control system CS1 accesses the next sequential record from the buffer section RBS1 and vectorizes the data in the record by using the data from the fraud intelligence unit FI1. For example, vectorizing involves taking an ANI

This Sheet Has Been ReplacedTHIS SHEET HAS BEEN
REPLACED

- 14 -

and querying the FIU FI1 if it is a bad ANI. If so, the analysis section AS1 defines it as "Using a bad ANI" and thereby places it in a format that conforms to the format of a data element or characteristic in the rules section RS1 so that the record can be matched with the record in the rules of Figs. 3 to 13. It includes applying appropriate thresholds, and referring to the records to the FIU database when needed.

In step 1420, the rules section RS1 receives the data from the analysis section AS1 and scans the vectors and compares them with the next (or the first, if this is the first) rules to see if they match the rules.

In step 1424, the rules section RS1 asks and acts if any of the combinations of vectors in this call match a rule, i.e. match all the data elements or characteristics of a rule. If yes, the rules section RS1 goes to step 1427 and directs an action priority dictated by the rule to the fraud containment section FC1. If not, it returns to step 1407 and accesses the next record.

Upon receiving the action priority, the fraud containment FC1 issues an alert report to the CSAM CS1. In step 1430, it adds the action priority and call data to the database of the fraud intelligence unit FI1 and the CSAM.

In step 1434, the fraud containment section FC1 determines if the action priority is HHa. If yes, the fraud containment section FC1 proceeds to step 1437 and sends a signal to disconnect the caller and, in an embodiment, to blocks the next immediate call from that caller. It also returns the process to step 1404. If the answer in step 1434 is no, in step 1440, the fraud containment section FC1 asks if this is of action priority HHb. If yes, in step 1444, fraud containment section FC1 sends a signal to block the next call and return the operation to step 1404. If no, it returns the operation

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

to step 1407.

While the various steps in Fig. 14 were ascribed to various sections RBS1, AS1, RS1, and FC1 of the control system CS1, these can be performed by any form of processor arrangement in the system SC1. The invention is not limited to this section arrangement nor this series of steps. The system CS1 may perform its function of combining the data and comparing it to the rules stored therein to obtain an action priority in any number of other ways.

While only two action control points and CDRPs appear in the drawings, it will be evident that other action control points may be part of the network, and each has a CDRP which communicates with the control system CS1.

According to an embodiment of the invention, the rules section RS1 of the control system CS1 distinguishes between calls that it can identify as possibly fraudulent from a single call, such as shown in boxes 334 and 410, and identifications that require a number of calls, such as hacking. The former are called single call events and the latter multiple calls events. The rules section RS1 then first attempts to match only vectors using data from the CDRPs with boxes having single call events. Thereafter, it scans and matches vectors with the data from both the CDRPs and the fraud intelligence unit FI1 with the remaining boxes.

In an embodiment, a different version of the rules in Fig. 10 is obtained by considering out of business hour calls. In those rules, if the calls come in from suspicious NPA-NXX, or pay phones (indicated by ii digits), the threshold will be lower (single call) for action priority H. Otherwise the action priority is at least as high as that for rules applying to business hour calls.

It will be noted that the control system CS1 is

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

- 16 -

connected to the fraud intelligence unit FI1 for querying the unit's database for information which is required during the fraud detection process. This connection is also used by the control system CS1 to enter and delete information in the database of the fraud intelligence unit FI1, when fraud information which is obtained from detected events is saved for future use.

According to an embodiment the fraud events which are to be detected are expressed in the form of Boolean rules. These rules are logical expressions each of which describes a particular fraud scenario. These rules describe certain basic characteristics of a fraud event or fraud vectors. The rules are executed logically in the control system processor, and if the outcome of a rule is "true", then a corresponding fraud event has been detected. If false, there is no fraud event detected by that rule and the processor moves on to apply the next rule. This process runs continuously, to apply all the rules in the repertoire of the control system, for every new X-record which is pumped into the RBS1 from the CDRPs RP1 and RP2.

According to an embodiment, in the received record buffer section RBS1, the records are arranged in a chronological scheme, the latest set being on the top and the oldest set being dropped from the buffer at the bottom. The received record buffer section RBS1 holds about 4 hours worth of prefiltered records (X-records) and this serves as a form of short term historical data store.

In an embodiment of Fig. 2, the analysis section AS1 uses the database of the fraud intelligence unit FI1 in the analysis process. It first examines an X-record from the received record buffer section RBS1 information element by information element, and determines its characteristics of fraud.

The X-records contain in general, a mix of

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

quantitative and qualitative information. In an embodiment, the latter are also expressed in the form of binary coded decimal digits, which encode the qualities. But, the fraud scenario rules are in terms of vectors. Thus, the analysis section AS1 converts the quantitative and encoded qualitative information of the X-record into corresponding vectors.

In this embodiment, the method is based on two separate procedures. In the simplest of cases, a quantitative value is compared against some threshold values (which are conveniently arranged to be adjustable), in a simple equation or inequality expression. For example, consider the information element called "call duration" which is expressed in the record in terms of seconds. This needs to be vectorized to just two vectors, short and long. It is done in the following expression, which is executed during the analysis procedure.

If call duration $\leq$ t1 then short.
If call duration $\geq$ t2 then long.

The thresholds t1 and t2 are adjustable, which makes the definition of short and long relative.

In an embodiment, the analysis section AS1 reduces the information elements of an X-record to vectors in this rule based manner. For some others, especially the telephone numbers, the analysis section AS1 refers to the fraud intelligence unit FI1 database in order to derive its vectors. For example, the analysis section may consider a typical originating number on an X-record. To determine if this is a PBX number, it queries the FIU if this is on the list of suspected ANI's. It also determines if the originating number on the X-record is from a suspicious calling area from where a large number of fraud calls are made by referring to the FIU FI1. The

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

analysis unit AS1 obtains such information by a query to the fraud intelligence unit FI1 database. The information is found there, because it was entered there previously.

Further, it determines if the originating number is a repeating originating number of many calls which have been made within the last 4 hours by searching through the record of the buffer section RBS1. It determines if this is "Using repeated ANI". The analysis unit AS1 derives this vector by matching the same originating number in many of the records which are in the RBS1. If the number of occurrences exceed a threshold N1 it is significantly repeating. This search and match operation is carried out to obtain vectors which are needed before the rules for multiple call fraud events are applied.

Thus, in this embodiment, by repeated application of these steps to the information elements of the X-record, the analysis unit AS1 converts the records to vectors. In addition to the vectors, the analysis unit AS1 retains some of the information elements from the original X-record as they are. These are:

- Record ID
- Call ID
- Toll Switch ID
- Originating number
- Dialed number
- Terminating number
- Authorization code.

These numbers are used in post detection actions of prevention, and record keeping procedures. These are retained in addition to their vector forms. All others are used in their vector form only.

As stated, the rules section RS1 classifies fraud events into two classes called a single call event

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

28 MAY 1971

- 19 -

and a multiple call event. The single call event requires the analysis of the information elements in the record of a single call only. For example, a record may bear the following information:

- International call
- Call made from a PBX
- Long duration call
- Off-business hour call
- Terminating in a high fraud country.

This scenario does not need the information contained in any other records to declare that this record represents a fraud event. Figures 3 to 6 describe many scenarios of single call fraud events which the rules section RS1 includes in its repertoire.

Multiple call fraud events require the information carried on more than one record. The rule which describes such an event in the rules section RS1 will contain vectors which refer to characteristics which can only be derived from analyzing and comparing several records.

The rules section RS1 derives these characteristics by the analysis and comparison of many records. Figs. 7 to 12 contain examples of fraud scenarios of this class. In general, this class represents the more difficult to detect fraud events. A 4 hour storage requirement of the RBS1 is used for the detection of this class of events. This chronological store of records allows the rules section RS1 to perform the required comparison among the collected records to detect such events. However, records of time durations, such as 2 to 8 hours, may also be used.

The rules depicted in the Fig. 13 cover a large number of rules of both these classes and enable the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

detection system to be capable of detecting most of the commonly committed fraud acts. In the figure, the vectors of the rules are represented as a list implying that they all must be present concurrently to make the rule "true". In other words, the "AND" designation of the boolean expression has been dropped. Additions and deletions to the rules may be made with ease to give high flexibility to the process.

To disconnect a call, the fraud containment section FC1 responds to the action priority from the rules section RS1 and sends a message to the signal transfer points STP1 and STP2. The section FC1 gives the identity of the switch and the call which originated there, along with a command which makes the switch operate as if the call has been terminated by the called party. This causes the switch to disconnect the call and go through all the normal procedures which accompany the termination of a call. Thus the fraud caller will experience a hang-up in the middle of a call. If a second call from that telephone is initiated, that call will be treated by blocking as for the case HHb.

In the switch network TSN, signal transfer points STP respond to the fraud control section to operate on originating and terminating action control points ACPO and ACPT which disconnect calls coming from an access demand source ADS and going to an egress EGR. In the switch network TSN, signal transfer points STP coact with network control points NCP to operate on originating and terminating action control points ACPO and ACPT which block calls coming from an access demand source ADS and going to an egress EGR. Call data may pass directly between the originating access control points ACPO and ACPT and the fraud intelligence unit FI1.

The basic nature of the detection process which is employed is that of an expert system which employs

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

recognition of the various elemental characteristics of the phenomenon which is to be detected. It is rule-based and heuristic in nature, as opposed to mathematical methods based on statistical parameters and multi-dimensional representations. The heuristic method of the invention, is very flexible, adaptable, and is not based on statistical studies of the fraud events. Natural neural systems, which are the result of millions of years evolution, are based on similar heuristic strategies, in which the incoming information is filtered to obtain a finite set of characteristics and building up more complex composites from them, which act as templates for matching and final detection.

Short calls cannot be detected until after termination. The CDRPs transmit short calls to the control system CS1 immediately after termination.

In an embodiment, the fraud intelligence unit includes a processor that organizes the database to deal with query and response from the control system CS1.

The information to the FIU FI1 is initially entered manually on the basis of prior fraud cases. To provide the fraud intelligence unit FU1 with further initial information, the control system CS1 is then set in a "training mode" before it is fully deployed. In this mode, the control system is inhibited from executing any preventive actions, but freely detects fraud events. In this mode, it adds to the initial human input by pumping important intelligence data to the database of the fraud intelligence unit FI1. This data can be carefully monitored and used for detection, when fully deployed. When fully deployed, the control system CS1 updates the database of the fraud intelligence unit FI1 with information on new fraud events.

To increase the flexibility of the detection process, any information which is considered as

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
 REPLACED

28 MAY 1991

- 22 -

contributing to increase the certainty of detection can be stored in the fraud intelligence unit FI1 database and referred to at the time of analysis. No restrictions based on mathematical consistency need apply.

The Control System CS1 can be located centrally or in a distributed manner as one per switch office, according to the economics and performance requirements of the telephone switching network TSN. In either case, it is situated conveniently to collect call detail records from all the toll switches of the telephone switching network TSN.

In the embodiment of Fig. 1, the call detail records are arranged to be collected from the switches ACPO and ACPT via their CDRPs RP1 and RP2 and RP2. The records are collected in real time, which means that the data about a call are available at the control system CS1 while the call is still in progress. Continuous elapsed time data is made available for calls which are in progress. In the case of very short calls the data on the calls are collected immediately thereafter.

From a very high level point of view, the main functions of the control system CS1 are to:

- (1) detect fraud events by analyzing call records,
- (2) execute actions as indicated by action priorities, and
- (3) communicate as needed with the CDRPs, the database of the fraud intelligence unit FI1, and the corporate security administration monitor CSAM.

The real-time operating system of the control system CS1 performs the first two functions in a cyclic fashion and the third one on a on-demand or needed basis. The detection, the execution of actions, and the presentation of information to the corporate security administration monitor CSAM takes place in a cyclic

This Sheet Has Been Replaced



THIS SHEET HAS BEEN

fashion, whereas the CDRPs RP1 and RP2 and RP2 and the corporate security administration monitor CSAM are serviced as they interrupt the control system CS1 with a demand for service. The control system CS1 will query the database of the fraud intelligence unit FI1, as required in the analysis of the call detail information contained in the call records, during the detection process.

In Figs. 3 to 13, the rules are arranged in a pyramidal fashion, moving from a very general scenario to more and more defined and restrictive scenarios. The more restricted the scenario is, the higher is the detection certainty that the event is fraudulent.

In an embodiment, to block a call, the fraud containment section FC1 responds to the action priority from the rules section RS1 and sends a special message to the signal transfer point STP1. The message contains a command to block the next call from a specified ANI. The STP signal transfer point STP1 will distribute this command to the correct Network Control Point NCP, which handles the call processing of all business service calls. The network control point NCP will then, divert the call to a ring busy terminal, which will frustrate the caller's attempt to use the network.

In step 1437, the fraud containment section FC1 acts to disconnect the caller and block the next call from the caller. According to an embodiment of the invention, the next call is not blocked.

According to an embodiment of the invention, the FIU FI1 contains a processor which performs the matching functions with data from the analysis section AS1.

While embodiments of the invention have been described in detail, it will be evident to those skilled in the art that the invention may be embodied otherwise without departing from its scope.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



Claims:

1. The method of controlling access of a user to a resource, comprising:

storing, in a control data base, a set of attributes concerning an access from an access demand source;

maintaining a rules data base of rules concerning attributes for determining corrective action;

determining whether data the control data base matches the rules in the rules data base; and

effecting corrective action by disconnecting the access during access time in response to a match between data in the control data base and data in the rules data base.

2. A method as in claim 1, wherein storing in the control data base includes storing in a first access data base a first set of attributes concerning the ongoing access.

3. A method as in claim 2, wherein storing in the control data base includes storing in a second access data base a second set of attributes concerning the history of prior accesses made by the access demand source;

the step of determining whether data the access data base matches the rules in the rules data base includes determining whether to disconnect the access, block future accesses, or take other action; and

the step of effecting corrective action includes disconnecting the access, blocking future accesses, or taking other action.





28 MAY 1997

- 25 -

4. A method as in claim 3, wherein said step of storing data in said second access data base includes storing one of the following:

- PBX ANIs (Private Branch Exchange Automatic Number Identifications),
- University PBX's and Centrex's,
- Suspicious NPAs-NXX for originating numbers,
- Suspicious terminating numbers,
- Known bad ANIs,
- Suspicious country codes,
- Forbidden country codes,
- Compromised Authorization Codes,
- ANI's from detected fraud events,
- Originating numbers from detected fraud events,
- Terminating numbers from detected fraud events,
- Authorization codes from detected fraud events,
- Other files as required by CSAM (Telephone Corporation Security Administration Monitor).

5. A method as in claim 3 or claim 4, wherein the step of storing in the second access data base includes updating the second access data base with data from accesses having matches in the determining step.

6. A method as in claim 5, wherein the step of storing in the second access data base includes updating the second access data base with data from accesses having matches in the determining step.

7. A method as in any of claims 2-6, wherein said storage in said first access data base includes storing one or more of the following attributes:

- requesting user
- request time
- length of use
- destination requested
- user authorization code
- whether use request is cellular.

8. A method as in any of the preceding claims, wherein the data in said



* C L N S *

THIS SHEET HAS BEEN
REPLACED



28 MAY 1997

- 26 -

rules data base includes access demands made:

- During business hours,
- During non-business hours,
- Excessively long,
- Domestic accesses,
- To a limited dialed MPA = 800,
- To a termination number = CPE,
- To a country code,
- ANI = CPE (Automatic Number Identification with Customer Premises Equipment),
- Accesses using SDN-NRA (Software Defined Network — Network Remote Access),
- To a suspected country code,
- Using a bad ANI,
- Of short duration,
- Using repeated ANI,
- From non-frequent accessor,
- To successive different dialed numbers, Using suspected patterned dialing,
- With a connect time difference using a less than PDD (Post Dialing Delay) +e, i.e. going from one number to another quickly,
- Using an invalid authorization code,
- With a number of accesses in repeat set greater than threshold,
- Using a SDN (Software Defined Network) virtual private network,
- Using different ANI to same termination No.,
- Using the same authorization code from another location greater than at least one access continuing,
- Having greater than access duration overlap,
- With simultaneous use of mobile number,
- Cellular,
- Of the same MIN,
- Using distance between access locations/elapsed time greater than a given value τ ,
- Multiple accesses from same ANI (Automatic Number Identification) greater than x,
- Repeated dialed numbers,



* C L M S *

THIS SHEET HAS BEEN
REPLACED



28 MAY 1997

- 27 -

- Terminating at a number which is a known DISA/RMATS (Direct Inward Switched Access/Remote Maintained Access Test System Maintained Port),
- Originating in suspect MPA-NXX or pay-phone,
- Multiple accesses from same ANI,
- CPE (Customer Premise Equipment) to a known high fraud country,
- CPE (Customer Premise Equipment) to a known medium fraud country,
- Non CPE type of service,
- Suspicious terminating number,
- Multiple accesses billed to same number,
- Multiple 800 accesses exceeding preset number.

9. A system controlling access of a user to a resource, comprising:
a control data base with a set of attributes concerning an ongoing access from an access demand source;

rules data base with rules concerning attributes for determining corrective action;

means for determining whether data in the control data base matches the rules in the rules data base; and

means for effecting corrective action by disconnecting the access during access time in response to a match between data in the control data base and data in the rules data base.

10. A system as in claim 9, wherein said control data base includes a first access data base with a first set of attributes concerning the ongoing access.

11. A system as in claim 10, wherein the control data base includes a second access data base with a second set of attributes concerning the history of prior accesses made by the access demand source;

the means for determining whether data in the access data base matches the rules in the rules data base includes means for determining whether to disconnect the access, block future accesses, or take other action; and

the means for effecting corrective action includes means for disconnecting the access, blocking future accesses, or taking other action.



* C L M S *

THIS SHEET HAS BEEN
REPLACED



12. A system as in claim 11, wherein said second access data base includes data on one of the following:

- PBX ANIs (Private Branch Exchange Automatic Number Identifications),
- University PBX's and Centrex's,
- Suspicious NPAs-NXX for originating numbers,
- Suspicious terminating numbers,
- Known bad ANIs,
- Suspicious country codes,
- Forbidden country codes,
- Compromised Authorization Codes,
- ANI's from detected fraud events,
- Originating numbers from detected fraud events,
- Terminating numbers from detected fraud events,
- Authorization codes from detected fraud events,
- Other files as required by CSAM (Telephone Corporation Security Administration Monitor).

13. A system as in claim 11 or claim 12, wherein the control data base includes means for updating the second access data base with data from accesses having matches in the means for determining.

14. A system as in claim 13, wherein the control data base includes means for updating the second access data base with data from accesses having matches in the means for determining.

15. A system as in any of claims 10 to 14, wherein said storage in said first access data base includes storage for one or more of the following attributes:

- requesting user
- request time
- length of use
- destination requested
- user authorization code





whether use request is cellular.

16. A system as in any of claims 9 to 15, wherein rules data base includes storage of access demands made:

- During business hours,
- During non-business hours,
- Excessively long,
- Domestic accesses,
- To a limited dialed MPA = 800,
- To a termination number = CPE,
- To a country code,
- ANI = CPE (Automatic Number Identification with Customer Premises Equipment),
- Accesses using SDN-NRA (Software Defined Network — Network Remote Access),
- To a suspected country code,
- Using a bad ANI,
- Of short duration,
- Using repeated ANI,
- From non-frequent accessor,
- To successive different dialed numbers, Using suspected patterned dialing,
- With a connect time difference using a less than PDD (Post Dialing Delay) +e, i.e. going from one number to another quickly,
- Using an invalid authorization code,
- With a number of accesses in repeat set greater than threshold,
- Using a SDN (Software Defined Network) virtual private network,
- Using different ANI to same termination No.,
- Using the same authorization code from another location greater than at least one access continuing,
- Having greater than access duration overlap,
- With simultaneous use of mobile number,
- Cellular,
- Of the same MIN,
- Using distance between access locations/elapsed time greater than a given value τ ,



- 30 -

- Multiple accesses from same ANI (Automatic Number Identification) greater than x,
- Repeated dialed numbers,
- Terminating at a number which is a known DISA/RMATS (Direct Inward Switched Access/Remote Maintained Access Test System Maintained Port),
- Originating in suspect MPA-NXX or pay-phone,
- Multiple accesses from same ANI,
- CPE (Customer Premise Equipment) to a known high fraud country,
- CPE (Customer Premise Equipment) to a known medium fraud country,
- Non CPE type of service,
- Suspicious terminating number,
- Multiple accesses billed to same number,
- Multiple 800 accesses exceeding preset number.

This Sheet Has Been Replaced



* C L M S *

THIS SHEET HAS BEEN
REPLACED

RESOURCE ACCESS CONTROL SYSTEM

ABSTRACT

Access of a user to a resource, such as a telecommunications network, includes storing, in a first call data base, a first set of attributes concerning an ongoing call from a caller. A second call data base stores a second set of attributes concerning the history of prior calls made by the caller. A rules data base stores rules concerning attributes for determining whether to disconnect the call, block future calls, or take other action. A determination is made whether data in at least one of the call data bases matches the rules in the rules data base. The call is then disconnected, the next call blocked, or other action is taken, in response to a match between data the call data bases and data in the rules data base. Preferably, the second call data base is updated in response to matches with the rules data base.

FIGURE 2

This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

28 MAY 1997

1

FIG. 1

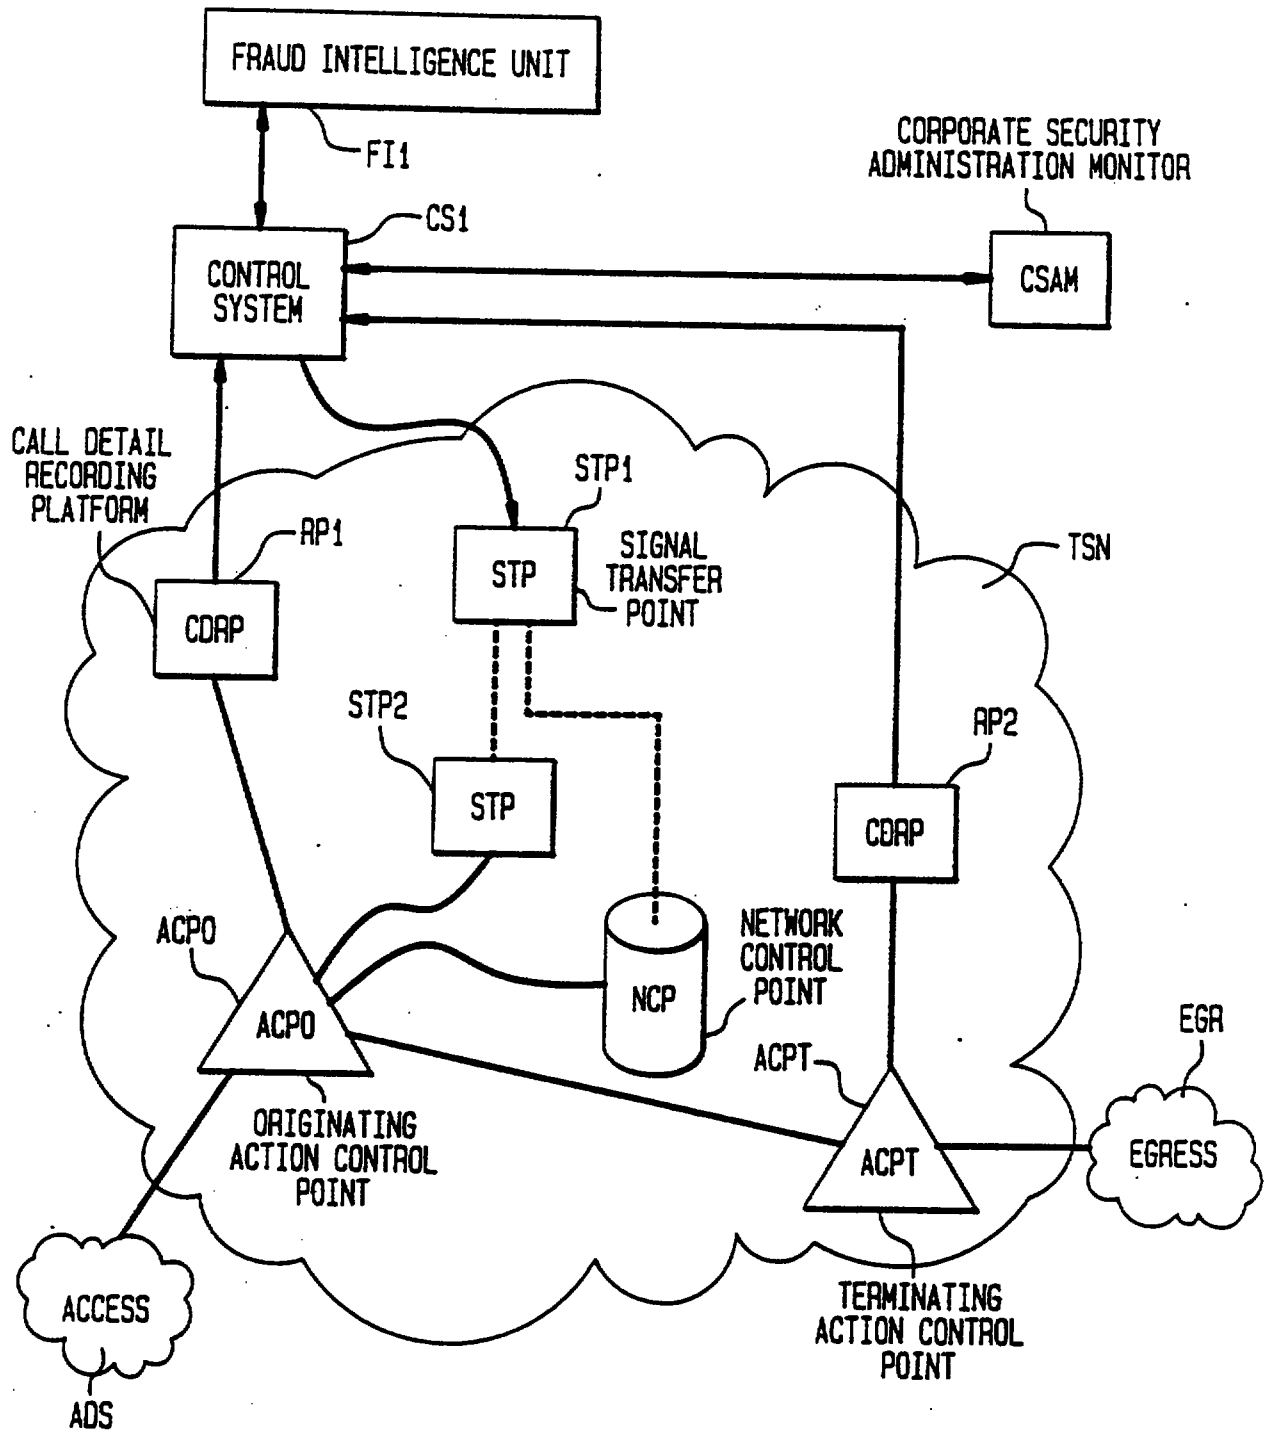


This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

2

FIG. 2

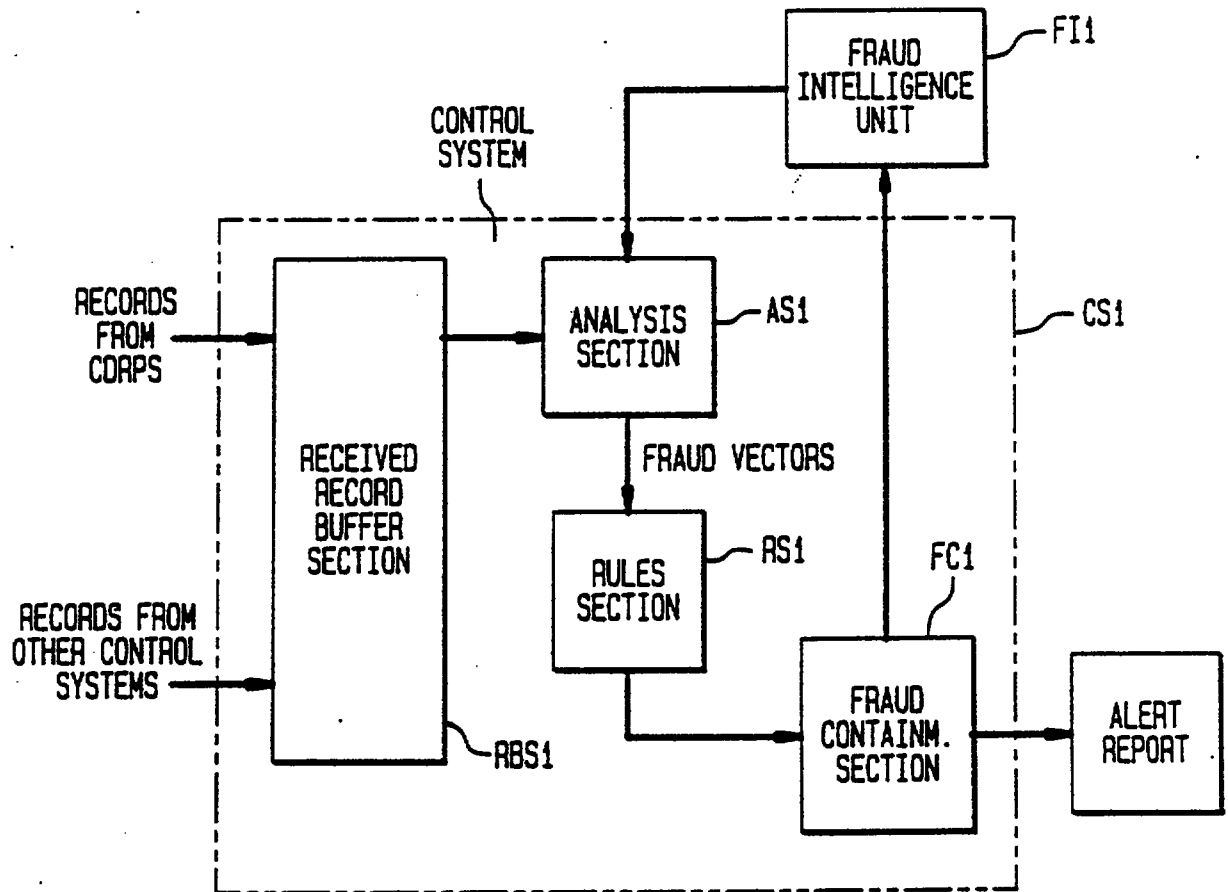

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

28 MAY 1997

This Sheet Has Been Replaced



3

FIG. 3

CHARACTERISTICS	ACTION PRIORITY
NON. BUS. HRS. LONG INTERNATIONAL	L 310
NON. BUS. HRS. LONG DOMESTIC	L 314
NON. BUS. HRS. LONG DIALED NPA = 800	L 317
NON. BUS. HRS. LONG DIALED NPA = 800 TERMINATION # = CPE (ADD EXCLUSION)	L 320
NON. BUS. HRS. LONG DIALED NPA = 800 TERMINATION # = CPE II DIGITS (COCOTS = 07)	M 324
NON. BUS. HRS. LONG INTERNATIONAL BAD ANI (GET THE LIST FROM CASE MGMT)	M 327
NON. BUS. HRS. LONG INTERNATIONAL SUSP. ANI_NPA-NXX)	L 330
NON. BUS. HRS. LONG INTERNATIONAL ANI = CPE FORBIDDEN CC (CUST. DOESN'T ALLOW)	HHa 334
NON. BUS. HRS. LONG INTERNATIONAL ANI = CPE SUSP. CC (OR NOT CALLED BEFORE)	M, L 337

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



4

FIG. 4

CHARACTERISTICS	ACTION PRIORITY
REG. BUS. HRS. LONG INTERNATIONAL ANI = CPE FORBIDDEN CC (CUST. DOESN'T ALLOW)	HHa
REG. BUS. HRS. LONG INTERNATIONAL ANI = CPE SUSP. CC (OR NOT CALLED BEFORE)	M, L

FIG. 5

CHARACTERISTICS	ACTION PRIORITY
REG. BUS. HRS. LONG INTERNATIONAL SDN-NRA FORBIDDEN CC	HHa
REG. BUS. HRS. LONG INTERNATIONAL SUSP. ANI-NPA-NXX SDN-NRA SUSP. CC	H
REG. BUS. HRS. LONG INTERNATIONAL BAD ANI SDN-NRA	M
REG. BUS. HRS. LONG INTERNATIONAL BAD ANI SDN-NRA SUSP. CC	HH
NON. BUS. HRS. LONG SDN-NRA ACCESS OFF-NET DOMESTIC SUSP. ANI-NPA-NXX	L

THIS SHEET HAS BEEN
REPLACED

28 MAY 1997

5

FIG. 6

CHARACTERISTICS	ACTION PRIORITY	
SINGLE CALL EVENTS WITH CELLULAR CALLS.		
LONG CELLULAR INTERNATIONAL	L	610
LONG CELLULAR TERM # = CPE	M	614
LONG CELLULAR INTERNATIONAL SDN	M	617

FIG. 7

CHARACTERISTICS	ACTION PRIORITY	
SHORT REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIFFERENT DIALED #	L	710
SHORT NON. BUS. HRS. REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIFFERENT DIALED # SUSP. ANI NPA-NXX	H	714
SHORT REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIALED NXX-XXXX PATTERNED	H	717

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

28 MAY 1991

6

FIG. 8

CHARACTERISTICS	ACTION PRIORITY	
SHORT NON. BUS. HRS. REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIALED # PATTERNED SUSP. ANI NPA-NXX	HHb	810
SHORT REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 CONNECT TIME DIFFERENCE $\leq$ PDD + e (THIS IS COMPUTER HACKING SCENARIO)	H	814
HACKING FOR AUTHORIZATION CODE (AC)		817
SHORT REPEAT ANI NOT FREQUENT CALLER REPEAT 800 DIALED NUMBER (ACCESS) INVALID AC	H	820
SHORT REPEAT ANI NOT FREQUENT CALLER REPEAT 800 DIALED NUMBER (ACCESS) PATTERNED AC	HHb	824
ANI LOCKOUT FEATURE OF SDN THIS IS A CURRENTLY OFFERED SDN FRAUD PROTECTION FEATURE		827
SHORT REPEAT ANI NOT FREQUENT CALLER REPEAT 800 DIALED NUMBER (ACCESS) INVALID AC NUMBER OF CALLS IN REPEAT SET $\geq$ THRESHOLD	HHb	830

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

28 MAY 1997

7

FIG. 9

CHARACTERISTICS	ACTION PRIORITY	
SIMULTANCITY OF CODES, MINS, ETC		910
SDN DIFFERENT ANI SAME AC > AT LEAST ONE CALL CONTINUING > (THIS FOR IN PROG CALLS AS IN KBS NETWORK) CALL DURATION OVERLAP (THIS FOR NetEXPERT)	HHb	914
SDN CELLULAR SAME MIN > AT LEAST ONE CALL CONTINUING > (THIS FOR IN PROG CALLS AS IN KBS NETWORK) CALL DURATION OVERLAP (THIS FOR NetEXPERT)	HHb	917
GEOGRAPHIC REASONABLENESS		920
CELLULAR MULTIPLE CALLS SAME MIN (DIST. BETWEEN CALL ORIG. LOCATIONS) / (ELAPSED TIME) >= THRESHOLD	HHb	924

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

28 MAY 1997

8

FIG. 10

CHARACTERISTICS	ACTION PRIORITY	
LONG BUSINESS HOURS MULTIPLE CALLS (THRESHOLD TBD) SINGLE ANI ORIGINATING 800 OR I/800 CALLS SAME DIALED NUMBER TERMINATING NUMBER NOT KNOWN TO BE DISA/RMATS	M	1010
LONG BUSINESS HOURS MULTIPLE CALLS (≥ 5 PER HR. SUGG. THRESHOLD) MULTIPLE ANI ORIGINATING 800 OR I/800 CALLS SAME DIALED NUMBER TERMINATING NUMBER NOT KNOWN TO BE DISA/RMATS	M	1014
LONG BUSINESS HOURS MULTIPLE CALLS (≥ 5) SINGLE ANI ORIGINATING OR MULT. ANI ORIGINATING 800 OR I/800 CALLS SAME DIALED NUMBER TERMINATING NUMBER KNOWN DISA/RMATS	H	1017
LONG BUSINESS HOURS MULTIPLE CALLS (≥ 2) SINGLE ANI ORIGINATING OR MULT. ANI ORIGINATING 800 OR I/800 CALLS ORIGINATING IN SUSP. NPA-NXX OR PAYPHONE (INDICATED BY ii DIGITS = 07) SAME DIALED NUMBER TERMINATING NUMBER KNOWN DISA/RMATS OR NOT KNOWN	H	1020

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

28 MAY 1971

9

FIG. 11

CHARACTERISTICS	ACTION PRIORITY	
LONG BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI KNOWN CPE OF CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THE THRESHOLD - NUMBER OF CALLS - IS COUNTRY SPECIFIC)	H	1110
LONG BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI NON CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THE THRESHOLD IS COUNTRY SPECIFIC)	M	1114
LONG OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI KNOWN CPE OR CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THRESHOLD IS COUNTRY SPECIFIC AND LOWER THAN THE THRESHOLD FOR THE CORRESPONDING RULE FOR BUSINESS HOURS CALLS)	H	1117
LONG OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI NON CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THRESHOLD IS COUNTRY SPECIFIC AND LOWER THAN THE THRESHOLD FOR THE CORRESPONDING RULE FOR BUSINESS HOURS CALLS)	M	1120

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

FIG. 12

CHARACTERISTICS	ACTION PRIORITY	
LONG BUSINESS HOURS OR OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI CPE TYPE OF SERVICE OR KNOWN CPE DOMESTIC CALL SUSPICIOUS TERM. NO (BULLETIN BOARD, ETC. FROM NEGATIVE DATABASE OF TERM. NUMBERS)	H	1210
LONG BUSINESS HOURS OR OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI NON-CPE TYPE OF SERVICE DOMESTIC CALL SUSPICIOUS TERM. NO. (FROM NEGATIVE DATABASE OF TERMINATING NUMBERS)	L	1214

FIG. 13


CHARACTERISTICS	ACTION PRIORITY	
MULTIPLE CALLS (≥ 5) BILLED TO SAME NUMBER INTERNATIONAL CALLS HIGH OR MEDIUM FRAUD COUNTRY	H	1310
MULTIPLE COLLECT CALLS (≥ 5) TERMINATING AT SAME NUMBER INTERNATIONAL CALLS HIGH OR MEDIUM FRAUD COUNTRY	M	1314
MULTIPLE 1-800-ATT CALLS (≥ 5) FROM SAME ANI INTERNATIONAL CALLS HIGH OR MEDIUM FRAUD COUNTRY	H	1317
MULTIPLE CALLS (≥ 5) FROM SAME ANI ANI IN SUSPICIOUS NPA-NXXX BILL TO CARDS (SAME OR DIFFERENT) (0 + REPORT) SAME TERMINATING NUMBER TERMINATING NUMBER KNOWN DISA/RMATS	M	1320

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

FIG. 14

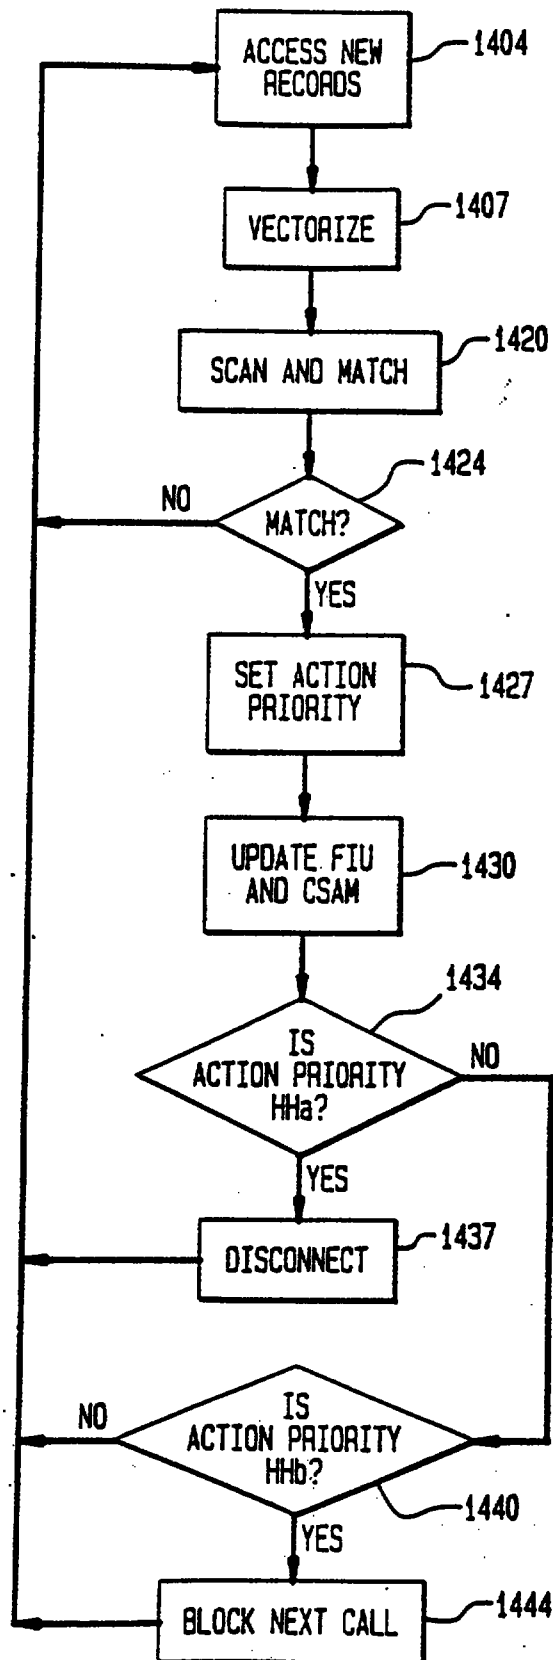

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



06 DEC 1997

- 24 -

What is claimed is:

1. A method of controlling access of a user to a telephone network, comprising the steps of:

storing, in a control data base, a set of attributes concerning an ongoing incoming call from an access demand source by a user;

maintaining a rules data base of a plurality of rules designating one of a plurality of degrees of likelihood that any call having a particular attribute is fraudulent, some of said degrees being high and some being lower;

determining whether an attribute in the data of the control data base matches an attribute in one of the plurality of rules in the rules data base; and

effecting corrective action in response to a match between data in the control data base and predetermined rules in the rules data base on the basis of the degree of likelihood indicated by the matching in the rules data base that the call is fraudulent;

the step of storing in the control data base including storing in a first access data base a first set of attributes concerning the ongoing incoming call;

the step of storing in the control data base including storing in a second access data base a second set of attributes concerning the history of prior accesses made by the access demand source;

the step of determining whether data in the one of the access data bases matches the rules in the rules data base including determining whether to disconnect the incoming call, block future incoming calls, or take other action; and

the step of effecting corrective action including disconnecting the incoming call, blocking future incoming calls, or taking other action;


the step of storing in the second access data base including updating the second access data base with data from incoming calls having matches in the determining step.

2. A method as in claim 1, wherein the step of effecting corrective action includes ignoring matches of attributes in the control data base and the rules data base when the attribute in the rules data base indicates a lower degree of likelihood that the call may be fraudulent.



* C L M S *

THIS SHEET HAS BEEN
REPLACED



06 DEC 1997

- 25 -

3. A method as in claim 2, wherein said step of storing in said first access data base includes storing one or more of the following attributes:

- requesting user;
- request time;
- length of use;
- destination requested;
- user authorization code;
- whether use request is cellular.

4. A method as in claim 1, wherein said step of storing data in said second access data base includes storing one of the following:


- PBX ANIs (Private Branch Exchange Automatic Number Identifications);
- University PBX's and Centrex's;
- Suspicious NPAs-NXX (pay phones indicated by ii digits) for originating numbers;
- Suspicious Terminating Numbers;
- Known bad ANIs;
- Suspicious Country codes;
- Forbidden country codes;
- Compromised Authorization Codes;
- ANI's from detected fraud events;
- Originating numbers from detected fraud events;
- Terminating numbers from detected fraud events;
- Authorization codes from detected fraud events;
- Other files as required by CSAM (Telephone Corporation Security Administration Monitor).

5. A method as in claim 4, wherein said step of storing in said first access data base includes storing one or more of the following attributes:

- requesting user;
- request time;
- length of use;
- destination requested;
- user authorization code;
- whether use request is cellular.

6. A method as in claim 1, wherein the data in said rules data base includes incoming calls made:



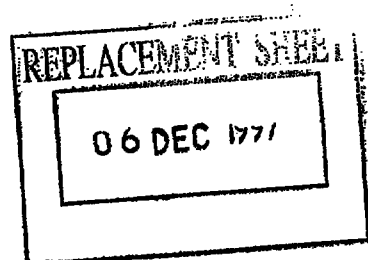

During business hours;
During non-business hours;
Excessively long;
Domestic accesses;
To a limited dialed NPA=800;
To a termination number=CPE;
To a country code;
ANI=CPE (Automatic Number Identification with Customer Premises Equipment);
Accesses using SDN-NRA (Software Defined Network—Network Remote Access);
To a suspected country code;
Using a bad ANI;
Of short duration;
Using repeated ANI;
From non-frequent caller;
To successive different dialed numbers;
 Using suspected patterned dialing;
With a connect time difference using a less than PDD (Post Dialing Delay)+e, i.e. going from one to another number quickly;
Using an invalid authorization code;
With a number of accesses in repeat set greater than threshold;
Using a SDN Software defined network (virtual private network);
Using different ANI to same termination No.;
Using the same authorization code from another location greater than at least one incoming call continuing;
Having greater than access duration overlap;
With simultaneous use of mobile number;
Cellular;
Of the same MIN;
Using distance between access locations/elapsed time greater than a given value τ ;
Multiple from same ANI (Automatic Number Identification) greater than x;
Repeated dialed numbers;



06 DEC 1997

This Sheet Has Been Replaced



- 27 -

Terminating at a number which is a known DISA/RMATS
(Direct Inward Switched Access/Remote Maintained
Access Test System Maintained Port);

Originating in suspect MPA-NXX or pay phone;

Multiple incoming calls from same ANI;

CPE (Customer Premise Equipment) to a Known high
fraud country;

CPE (Customer Premise Equipment) to known medium
fraud country;

Non CPE type of service;

Suspicious terminating number;

Multiple incoming calls billed to same number;

Multiple 800 incoming calls exceeding preset number.

7. A method as in claim 1, wherein the data in said rules
data base includes access demands made:

During business hours;

During non-business hours;

Excessively long;

Domestic incoming calls;

To a limited dialed MPA=800;

To a termination number=CPE;

To a country code;

ANI=CPE (Automatic Number Identification with Cus-
tomer Premises Equipment);

Accesses using SDN-NRA (Software Defined Network—
Network Remote Access);

To a suspected country code;

Using a bad ANI;

Of short duration;

Using repeated ANI;

From non-frequent accesser;

To successive different dialed numbers;

Using suspected patterned dialing;

With a connect time difference using a less than PDD
(Post Dialing Delay)+e, i.e. going from one to another
number quickly;

Using an invalid authorization code;

With a number of accesses in repeat set greater than
threshold;



* C L M S *

THIS SHEET HAS BEEN
REPLACED



06 DEC 1997

- Using a SDN Software defined network
(virtual private network);
- Using different ANI to same termination No.;
- Using the same authorization code from another location
greater than at least one access continuing;
- Having greater than access duration overlap;
- With simultaneous use of mobile number;
- Cellular;
- Of the same MIN;
- Using distance between access locations/elapsed time
greater than a given value τ ;
- Multiple accesses from same ANI (Automatic Number
Identification) greater than x ;
- Repeated dialed numbers;
- Terminating at a number which is a known DISA/RMATS
(Direct Inward Switched Access/Remote Maintained
Access Test System Maintained Port);
- Originating in suspect MPA-NXX or pay phone;
- Multiple accesses from same ANI;
- CPE (Customer Premise Equipment) to a Known high
fraud country;
- CPE (Customer Premise Equipment) to known medium
fraud country;
- Non CPE type of service;
- Suspicious terminating number;
- Multiple accesses billed to same number;
- Multiple 800 accesses exceeding preset number.
- 8. A system controlling access of a user to a telephone
network, comprising:
 - a control data base with a set of attributes concerning an
ongoing incoming call from an access demand source;
 - a rules data base with a plurality of rules designating one
of a plurality of degrees of likelihood that any call
having a particular attribute is fraudulent, some of said
degrees being high and some being lower;
 - means for determining whether an attribute in the data in
the control data base matches an attribute in the plu-
rality of rules in the rules data base; and
 - means for effecting corrective action in response to a
match between data in the control data base and pre-
determined rules in the rules data base on the basis of



* C L H S *

THIS SHEET HAS BEEN
REPLACED



06 DEC 1997

- 29 -

the degree of likelihood indicated in the rules database that the call is fraudulent;

the control data base including a first access data base with a first set of attributes concerning the ongoing incoming call;

the control data base including a second access data base with a second set of attributes concerning the history of prior accesses made by the access demand source;

the means for determining whether data in the one of the access data bases matches the rules in the rules data base including means for determining whether to disconnect the incoming call, block future incoming calls, or take other action; and

the means for effecting corrective action including means for disconnecting the incoming call, blocking future incoming calls, or taking other action;

the control data base including means for updating the second access data base with data from accesses having matches in the means for determining.

9. A system as in claim 8, wherein the means for effecting corrective action includes ignoring matches of attributes in the control data base and the rules data base when the attribute in the rules data base indicates a lower degree of likelihood that the call may be fraudulent.

10. A system as in claim 9, wherein said first access data base includes data on one or more of the following attributes:

requesting user;
request time;
length of use;
destination requested;
user authorization code;
whether use request is cellular.

11. A system as in claim 8, wherein said second access data base includes data on one of the following:

PBX ANIs (Private Branch Exchange Automatic Number Identifications);


University PBX's and Centrex's;

Suspicious NPAs-NXX (pay phones indicated by ii digits) for originating numbers;

Suspicious Terminating Numbers;



* C L N S *



06 DEC 1997

- 30 -

Known bad ANIs;
Suspicious Country codes;
Forbidden country codes;
Compromised Authorization Codes;
ANI's from detected fraud events;
Originating numbers from detected fraud events;
Terminating numbers from detected fraud events;
Authorization codes from detected fraud events;
Other files as required by CSAM (Telephone Corporation
Security Administration Monitor).

12. A system as in claim 11, wherein said storage in said first access data base includes storage for one or more of the following attributes:

requesting user;
request time;
length of use;
destination requested;
user authorization code;
whether use request is cellular.

13. A system as in claim 12, wherein the data in said rules data base includes data concerning one of the following types of accesses:

During business hours;
During non-business hours;
Excessively long;
Domestic accesses;
To a limited dialed MPA=800;
To a termination number=CPE;
To a country code;
ANI=CPE (Automatic Number Identification with Customer Premises Equipment);
Accesses using SDN-NRA (Software Defined Network—Network Remote Access);
To a suspected country code;
Using a bad ANI;
Of short duration;
Using repeated ANI;
From non-frequent accesser;
To successive different dialed numbers;



THIS SHEET HAS BEEN
REPLACED



06 DEC 1997

- 31 -

Using suspected patterned dialing;
With a connect time difference using a less than PDD
(Post Dialing Delay)+e, i.e. going from one to another
number quickly;
Using an invalid authorization code;
With a number of accesses in repeat set greater than
threshold;
Using a SDN Software defined network
(virtual private network);
Using different ANI to same termination No.;
Using the same authorization code from another
location greater than at
least one access continuing;
Having greater than access duration overlap;
With simultaneous use of mobile number;
Cellular;
Of the same MIN;
Using distance between access locations/elapsed time
greater than a given value τ ;
Multiple accesses from same ANI (Automatic Number
Identification) greater than x ;
Repeated dialed numbers;
Terminating at a number which is a known DISA/RMATS
(Direct Inward Switched Access/Remote Maintained
Access Test System Maintained Port);
Originating in suspect MPA-NXX or pay phone;
Multiple accesses from same ANI;
CPE (Customer Premise Equipment) to a known high
fraud country;
CPE (Customer Premise Equipment) to known medium
fraud country;
Non CPE type of service;
Suspicious terminating number;
Multiple accesses billed to same number;
Multiple 800 accesses exceeding preset number.
14. A system as in claim 8, wherein rules data base
includes storage of access demands made:
During business hours;
During non-business hours;



* C L M S *



06 DEC 1997

Excessively long;
Domestic accesses;
To a limited dialed MPA=800;
To a termination number=CPE;
To a country code;
ANI=CPE (Automatic Number Identification with Customer Premises Equipment);
Accesses using SDN-NRA (Software Defined Network—Network Remote Access);
To a suspected country code;
Using a bad ANI;
Of short duration;
Using repeated ANI;
From non-frequent accesser;
To successive different dialed numbers;
Using suspected patterned dialing;
With a connect time difference using a less than PDD (Post Dialing Delay)+e, i.e. going from one to another number quickly;
Using an invalid authorization code;
With a number of accesses in repeat set greater than threshold;
Using a SDN Software defined network (virtual private network);
Using different ANI to same termination No;
Using the same authorization code from another location greater than at least one access continuing;
Having greater than access duration overlap;
With simultaneous use of mobile number;
Cellular;
Of the same MIN;
Using distance between access locations/elapsed time greater than a given value τ ;
Multiple accesses from same ANI (Automatic Number Identification) greater than x;
Repeated dialed numbers;



* C L M S *

THIS SHEET HAS BEEN
REPLACED

06 DEC 1997

- 33 -

Terminating at a number which is a known DISA/RMATS
(Direct Inward Switched Access/Remote Maintained
Access Test System Maintained Port);
Originating in suspect MPA-NXX or pay phone;
Multiple accesses from same ANI;
CPE (Customer Premise Equipment) to a Known high
fraud country;
CPE (Customer Premise Equipment) to known medium
fraud country;
Non CPE type of service;
Suspicious terminating number;
Multiple accesses billed to same number;
Multiple 800 accesses exceeding preset number.

This Sheet Has Been Replaced

* C L M S *

THIS SHEET HAS BEEN
REPLACED

METHOD AND MEANS FOR PREVENTING FRAUDULENT USE OF TELEPHONE NETWORK

FIELD OF THE INVENTION

This invention relates to preventing fraudulent access to a resource, and particularly to methods and means for blocking or disconnecting telephone calls, in real time, from callers that are attempting to gain fraudulent access to telephone networks.

BACKGROUND OF THE INVENTION

Fraudulent telephone calls are a major source of revenue loss to telephone service providers. They also result in customer dissatisfaction when tolls are inadvertently charged to the subscriber as a result of fraudulently placed calls. Present systems use batch mode analysis of call details and sometimes manage to detect some types of fraud. This arrangement requires the telephone company to communicate with the culprit to end the abuse. It entails a delay in the prevention of fraud.

The ~~aforementioned~~ U.S. Application, Ser. No. 07/891, 347 filed May 29, 1992, now U.S. Pat. No. 5,375,244 discloses an access control system which uses "soft" decisions to determine if a user's profile are most like a valid user or a hacker. It clusters data for both and compares the user with both to obtain statistical probabilities of fraudulent access.

An object of the invention is to overcome the disadvantages of prior systems.

Another object of the invention is to detect and block or disconnect fraudulent access demands in real time.

SUMMARY OF THE INVENTION

According to a feature of the invention, these objects are attained by storing, in a control data base, a set of attributes concerning an access from an access demand source; main-

19 MAY 1998

taining a rules data base of rules concerning attributes for determining corrective action; determining whether data in the control data base matches the rules in the rules data base; and effecting corrective action by disconnecting the access during access time in response to a match between data in the control data base and data in the rules data base.

According to another feature of the invention, storing in the control data base includes storing in a first access data base a first set of attributes concerning the ongoing access.

According to another feature of the invention, storing in the control data base includes storing in a second access data base a second set of attributes concerning the history of prior accesses made by the access demand source; the step of determining whether data in the access data base matches the rules in the rules data base includes determining whether to disconnect the access, block future accesses, or take other action; and the step of effecting corrective action includes disconnecting the access, blocking future accesses, or taking other action.

According to another feature of the invention, the second access data base is updated on the basis of the matches.

These and other features of the invention are pointed out in the claims. Other objects and advantages of the invention will be evident from the following detailed description when read in light of the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a telephone network embodying features of the invention.

FIG. 2 block diagram of a control system in the network of FIG. 1 according to an aspect of the invention.

FIGS. 3 and 4 show the rules for operation of the network and system in FIGS. 1 and 2 for CPE fraud according to an aspect of the invention.

FIGS. 5 and 6 show the rules for operation of the network and control system in FIGS. 1 and 2 for CPE fraud according to an aspect of the invention.

FIGS. 7 and 8 show the rules for fraud involving hacking to remote access ports of CPE (Customer Premises Equipment) and SDN-NRA (Software Defined Network—Network Remote Access) according to an aspect of the invention.

FIG. 9 shows the rules to detect fraud involving multiple calls with the same SDN code or cellular MIN, and successive cellular calls with far apart originating locations from the same caller according to an aspect of the invention.

FIGS. 10 to 12 shows the rules for multiple calls likely to be actual fraud calls through the CPE according to an aspect of the invention.

FIG. 13 shows rules for detecting various kinds of miscellaneous fraud according to an aspect of the invention.

FIG. 14 is a flow chart illustrating operation of the system in FIGS. 1 and 2.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

FIG. 1 illustrates an arrangement embodying features of the invention. Here, a telephone switch network TSN connects a caller, or access demand source, ADS to a called party or egress EGR through two switches or central offices, namely, an originating action control point ACPO and a terminating action control point ACPT. The originating action control point ACPO and the termination action control point ACPT communicate with call detail recording platforms (CDRPs) RP1 and RP2 to supply the latter continuously with call detail records on a real-time basis. The action control points ACPO and ACPT generate these records for billing and record keeping by the CDRPs.

The CDRPs RP1 and RP2 also communicates with a control system CS1 which taps into the event message stream in the CDRPs RP1 and RP2 on a real-time on-demand basis. This means that the data is available to the control system CS1 while the call is going on. The control system CS1 analyzes the information elements which are contained in the CDRPs RP1 and RP2, as part of the detection of fraud events. In one embodiment of the invention, the control system CS1 accesses the data on all calls in the CDRPs RP1 and RP2. According to a preferred embodiment the control system CS1 accesses, from the CDRPs RP1 and RP2 only data for particular types of calls likely to produce significant fraud costs, namely:

Calls which are very short duration (<10 sec) These are interesting because these may be generated by automatic hacking devices.

Calls which are very long duration (>20 min).

International calls.

Calls placed on business customer's equipments and on business communication services. (Fraud call charges are billed mostly to business customers.)

Limiting the access to calls of this sort, eliminates the bulk of telephone calls from scrutiny by the control system CS1. These eliminated calls are normal calls which have a very low probability of incidence of fraud. When such incidences do occur, the loss to the network is small because

19 MAY 1998

they tend to be short distance domestic calls of short duration. This prefiltering, selects only calls which have an economically significant fraud cost to the network for transmission from the CDRPs RP1 and RP2 to the control system CS1.

According to one embodiment of the invention, the CDRPs RP1 and RP2 perform the selection, i.e. prefiltering, and according to another embodiment, the control system CS1 performs the prefiltering. In the latter embodiment, the CDRPs RP1 and RP2 accumulate the prefiltered records of all the calls which are being originating and progressing through all the toll switches of the area served by it for a small and convenient interval, say 15 seconds and sends the set to the control system CS1. The data on the prefiltered calls sent to the control system CS1 are herein called X-records.

The control system CS1 also exchanges data with a fraud intelligence unit (FIU) FI1, a telephone company corporate security administration monitor (CSAM) CSA1, and other control systems. The fraud intelligence unit FI1 has a database which stores "historic" information which is used for reference, to decide whether an information element on a record is significant for fraud detection or not.

According to an embodiment of the invention, the database of the fraud intelligence unit FI1 stores the following information:

- PBX ANIs (Private Branch Exchange Automatic Number Identifications).

- University PBX's and Centrex's.

- Suspicious NPAs-NXX for originating numbers.

- Suspicious Terminating Numbers.

- Suspicious Country codes.

- Forbidden country codes.

- Compromised Authorization Codes.

- ANI's from detected fraud events.

- Originating numbers from detected fraud events.

- Terminating numbers from detected fraud events.

- Authorization codes from detected fraud events.

- Other optional files entered manually by CSAM CSA1

In other embodiments, the FIU FI1 contains other information.

FIG. 2 is a block diagram of the control system CS1 in FIG. 1. The control system CS1 is preferably in the form of a single processor which performs its various functions. FIG. 2 shows the control system as composed of individual sections, namely a received record buffer section RBS1, an analysis section AS1, a rules section RS1, and a fraud containment section FC1. However, each of the blocks preferably represents a function of the processor, rather than

an individual unit, and the processor may perform all the functions with the same hardware. Nevertheless, according to an embodiment of the invention, any or all the blocks may be a separate section or unit. The blocks in the control system CS1 are referred to as sections for convenience.

The control system CS1 accesses the data from the CDRPs RP1 and RP2 and the fraud intelligence unit FI1 and matches the accessed data with a set of rules which the control system stores. The rules appear in FIGS. 3 to 13 and define the existence of various levels of fraud events such as HHa, HHb, H, M, and L. If the data matches a high level HHa, the control system CS1 signals the signal transfer point STP1 to disconnect the ongoing call. If the level is HHb, it signals the signal transfer point STP1 to block the next call from the access source ADS.

The control system CS1 also transfers information about detected fraud events to the CSAM CSA1 to raise alarm signals so that the network personnel can take appropriate manual control. Such manual operation may override the control system CS1 and disconnect selected calls or block selected calls, or to inhibit the disconnect or blocking action of the control system CS1. The CSAM CSA1 can also enter new information into the fraud intelligence unit FI1 database.

In FIG. 2, the control system CS1 receives the set of records from the CDRPs RP1 and RP2 and enters it to the received records buffer section RBS1. The analysis section AS1 receives the data from the buffer section RBS1 and uses the data from the fraud intelligence unit FI1 to derive vectors each of which conforms to a data element or characteristic in the rules in FIGS. 3 to 13. In other words, in order to match the data to the rules, the data must be in the format of each of the elements or characteristics of the rules. Accordingly, the analysis section AS1 vectors which specify whether a call is:

- During business hours.
- During non-business hours.
- Excessively long.
- Domestic calls.
- To a limited dialed NPA=800.
- To a termination number=CPE.
- To a country code.
- ANI=CPE (Automatic Number Identification with Customer Premises Equipment).
- Using SDN-NRA (Software Defined Network Network Remote Access).
- To a suspected country code.
- Using a bad ANI.

Of short duration.
 Using repeated ANI.
 From non-frequent caller.
 To successive different dialed numbers.
 Using suspected patterned dialing.
 With a connect time difference using a less than PDD
 (Post Dialing Delay) +e, i.e. going from one to another
 number quickly.
 Using an invalid authorization code.
 With a number of calls in repeat set greater than threshold.
 Using a SDN Software defined network (virtual private
 network).
 Using different ANI to same termination No.
 Using the same authorization code from another location
 greater than at least one call continuing.
 Having greater than call duration overlap.
 With simultaneous use of mobile number.
 Cellular.
 Of the same MIN (Mobile Identification Unit).
 Using distance between call locations/elapsed time
 greater than a given value τ .
 Multiple calls from same ANI (Automatic Number Identification)
 greater than x .
 Repeated dialed numbers.
 Terminating at a number which is a known DISA/RMATS
 (Direct Inward Switched Access/Remote Maintained
 Access Test System Maintained Port).
 Originating in suspect NPA-NXX or pay phone.
 Multiple calls from same ANI.
 CPE (Customer Premise Equipment) to a Known high
 fraud country.
 CPE (Customer Premise Equipment) to known medium
 fraud country.
 Non CPE type of service.
 Suspicious terminating number.
 Multiple calls billed to same number.
 Multiple 800 calls exceeding preset number.
 It will be understood that other vectors may be derived,
 and that the above list is by no means inclusive of all vectors
 possible. Other embodiments do not use all the aforementioned
 vectors.

Some of these vectors deal with quantitative values such
 as whether a call is short or long. The analysis section AS1,
 in deriving the vectors, compares each quantitative value
 with a threshold to produce a vector that indicates a high or
 low quantity such as a long call or short call. The thresholds

may be varied manually or automatically with the time of day, time of the month, or other circumstances, to change the criticality of the data.

The rules section RS1 stores the rules in FIG. 3 to 13 in the form of a look-up table. Each horizontal box in FIGS. 3 to 13 is a rule. In each box, the left side lists elements corresponding to vectors and the right side of each box indicates the action priority associated with the elements in the left side. The section RS1 of the processor scans the set of characteristics or vectors of a particular call and compares all the vectors with each of the rules in the boxes in FIGS. 3 to 13. It determines if the vectors of a call matches a rule.

In FIGS. 3 to 13, each rule is associated with a letter designation representing an action priority, such as HHa, HHb, H, M, and L. Action priorities are L for low, M for medium, H for high, HHa and HHb for very high. These designations represent the action categories which the control system CS1 would execute, if the rule became "true". They depend upon the seriousness and the certainty of detection.

If any set of the vectors matches all the elements in a rule, the rules section RS1 designates the particular action priority indicated in the rule. Various different calls may have vectors which satisfy several rules.

HHa and HHb are the categories that represents the highest priority of the action categories. In this case, it is considered that the detected event is certain to be fraudulent and automatic action to prevent the incident is taken by the control system. If the fraud event is that of a hacker's attempt to break into the toll network, then the preventive action is to block his next attempt by diverting it to a ring busy terminal. This action is signified by the action priority being HHb. If the action priority is HHa, then the solution is to disconnect the call which is in progress.

The fraud containment section FC1 responds to the rules section RS1 and sends out an alert report to the CSAM CSA1 and the FIU FI1 with respect to all the action priorities. If the action priority is HHb, it instructs the signal transfer points STP1 and STP2 to hold that information in a network control point NCP which handles the call processing of service calls. The latter then blocks succeeding calls from the same caller for a specific time. It does this by diverting the call to a ring busy terminal.

If the action priority is HHa the fraud containment section FC1 instructs the signal transfer point STP1 and STP2 to make the originating action control point ACPO or the terminating action control point ACPT disconnect or otherwise disable the call. This causes the switch to disconnect the call. Thus the fraud caller will experience a hang-up in the middle of a call. If successive calls within a predeter-

mined time period arrive from that telephone, that call will be treated by blocking as for action priority HHb.

An action priority H carries the detection of a fraud event which is of slightly lower certainty but nevertheless, needs immediate attention. The fraud control section FC1, in this case, calls for a human decision to execute prevention action. Such action is initiated from the corporate security administration monitor CSAM by sending special command which may result in the same actions as described above.

An action priority M indicates a further grade of less certainty of detection and the action treatments similar to that of H except that the human decision to take preventive action can be more deliberate and calculated to take many other aspects of the case, deriving from intelligence which are not available to the machine.

Action priority L is the lowest category. Preventive action is again human initiated, but is expected to be very infrequent for this category.

For all these categories, the fraud control section FC1 enters the following information from the call record to the fraud intelligence database.

- Originating number
- Dialed number
- Terminating number
- Authorization Code used
- Action priority

The fraud intelligence database FI1 stores this information for future calls. It bestows a capability of learning from experience to an otherwise mechanical rule-based system. The CSAM CS1 can constantly edit and monitor the intelligence thus collected via human supervision to prevent the detection process being corrupted by the uncontrolled growth of obsolete information.

The rules in FIGS. 3 and 4, boxes 310 to 414 deal with CPE fraud. Here, boxes 334 and 410 result in HHa action priorities.

The rules in FIGS. 5 and 6, boxes 510 to 524 and 610 to 617 deal with the possibility of cellular fraud or SDN-NRA (Software Defined Network—Network Remote Access) fraud. Here, for example, in the matches of 520, a long SDN-NRA international call during regular business hours using a bad ANI and suspected country code results in an HH (higher H) action priority. Matches at boxes 510 and 514 result in high action priorities whereas matches at boxes 517, 524, 610, 614, and 617 produce low or medium action priorities.

FIGS. 7 to 13 deal mainly with multiple call events. These fraud scenarios require the characteristics contained in a number of records of the recent past. In one embodiment of the invention, the rules in these figures are implemented with

19 MAY 1998

individual thresholds for each rule. FIGS. 7 and 8 deal specifically with fraud involving hacking to remote access ports of CPE (Customer Premises Equipment) and SDN-NRA (Software Defined Network—Network Remote Access). The rules in FIG. 9 detect fraud situations involving multiple calls where the same SDN authorization code or cellular MIN may be used, as well as successive cellular calls where the originating locations are too far apart to be originated by the same caller.

FIGS. 10 to 12 shows the rules that apply to multiple calls when the calls are likely to be actual fraud calls through the CPE (Customer Premises Equipment). FIGS. 11 and 12 show the rules for detecting the outgoing leg of actual fraud calls being perpetrated, possibly by call sellers.

FIG. 13 shows rules for detecting various kinds of miscellaneous fraud, e.g. third party fraud, collect call fraud, and card fraud to bypass 800 numbers blocks from pay phones.

As is evident, boxes 334, 410, and 510 ordain action priority HHa which result, according to an embodiment of the invention, in fraud containment section FC1 signalling to disconnect the ongoing call and, according to an embodiment, to block the next immediate call if it comes from the same caller. Boxes 810, 824, 830, 914, 917, and 924 cause the rules section RS1 via fraud containment section FC1 to signal blocking of succeeding calls which come from the same caller and have characteristics having action priority HHb.

FIG. 14 is a flow chart showing operation of the control system CS1 in FIGS. 1 and 2. In FIG. 14, step 1404, the control circuit CS1 accesses new records from the CDRPs RP1 and RP2 and from the fraud intelligence unit FI1. The received-record buffer section RBS1 in the control system CS1 accesses and stores prefiltered records from the CDRPs RP1 and RP2 and other control systems CS1 at other locations and removes the oldest data if the buffer is full. The analysis section stores the data from the fraud intelligence unit FI1.

In step 1407, the analysis section AS1 in the control system CS1 accesses the next sequential record from the buffer section RBS1 and vectorizes the data in the record by using the data from the fraud intelligence unit FI1. For example, vectorizing involves taking an ANI and querying the FIU FI1 if it is a bad ANI. If so, the analysis section AS1 defines it as "Using a bad ANI" and thereby places it in a format that conforms to the format of a data element or characteristic in the rules section RS1 so that the record can be matched with the record in the rules of FIGS. 3 to 13. It includes applying appropriate thresholds, and referring to the records to the FIU database when needed.

19 MAY 1998

10

In step 1420, the rules section RS1 receives the data from the analysis section AS1 and scans the vectors and compares them with the next (or the first, if this is the first) rules to see if they match the rules.

In step 1424, the rules section RS1 asks and acts if any of the combinations of vectors in this call match a rule, i.e. match all the data elements or characteristics of a rule. If yes, the rules section RS1 goes to step 1427 and directs an action priority dictated by the rule to the fraud containment section FC1. If not, it returns to step 1407 and accesses the next record.

Upon receiving the action priority, the fraud containment FC1 issues an alert report to the CSAM CS1. In step 1430, it adds the action priority and call data to the database of the fraud intelligence unit FI1 and the CSAM.

In step 1434, the fraud containment section FC1 determines if the action priority is HHa. If yes, the fraud containment section FC1 proceeds to step 1437 and sends a signal to disconnect the caller and, in an embodiment, to blocks the next immediate call from that caller. It also returns the process to step 1404. If the answer in step 1434 is no, in step 1440, the fraud containment section FC1 asks if this is of action priority HHb. If yes, in step 1444, fraud containment section FC1 sends a signal to block the next call and return the operation to step 1404. If no, it returns the operation to step 1407.

While the various steps in FIG. 14 were ascribed to various sections RBS1, AS1, RS1, and FC1 of the control system CS1, these can be performed by any form of processor arrangement in the system SC1. The invention is not limited to this section arrangement nor this series of steps. The system CS1 may perform its function of combining the data and comparing it to the rules stored therein to obtain an action priority in any number of other ways.

While only two action control points and CDRPs appear in the drawings, it will be evident that other action control points may be part of the network, and each has a CDRP which communicates with the control system CS1.

According to an embodiment of the invention, the rules section RS1 of the control system CS1 distinguishes between calls that it can identify as possibly fraudulent from a single call, such as shown in boxes 334 and 410, and identifications that require a number of calls, such as hacking. The former are called single call events and the latter multiple calls events. The rules section RS1 then first attempts to match only vectors using data from the CDRPs with boxes having single call events. Thereafter, it scans and matches vectors with the data from both the CDRPs and the fraud intelligence unit FI1 with the remaining boxes.

19 MAY 1998

In an embodiment, a different version of the rules in FIG. 10 is obtained by considering out of business hour calls. In those rules, if the calls come in from suspicious NPA-NXX, or pay phones (indicated by ii digits), the threshold will be lower (single call) for action priority H. Otherwise the action priority is at least as high as that for rules applying to business hour calls.

It will be noted that the control system CS1 is connected to the fraud intelligence unit FI1 for querying the unit's database for information which is required during the fraud detection process. This connection is also used by the control system CS1 to enter and delete information in the database of the fraud intelligence unit FI1, when fraud information which is obtained from detected events is saved for future use.

According to an embodiment the fraud events which are to be detected are expressed in the form of Boolean rules. These rules are logical expressions each of which describes a particular fraud scenario. These rules describe certain basic characteristics of a fraud event or fraud vectors. The rules are executed logically in the control system processor, and if the outcome of a rule is "true", then a corresponding fraud event has been detected. If false, there is no fraud event detected by that rule and the processor moves on to apply the next rule. This process runs continuously, to apply all the rules in the repertoire of the control system, for every new X-record which is pumped into the RBS1 from the CDRPs RP1 and RP2.

According to an embodiment, in the received record buffer section RBS1, the records are arranged in a chronological scheme, the latest set being on the top and the oldest set being dropped from the buffer at the bottom. The received record buffer section RBS1 holds about 4 hours worth of prefiltered records (X-records) and this serves as a form of short term historical data store.

In an embodiment of FIG. 2, the analysis section AS1 uses the database of the fraud intelligence unit FI1 in the analysis process. It first examines an X-record from the received record buffer section RBS1 information element by information element, and determines its characteristics of fraud.

The X-records contain in general, a mix of quantitative and qualitative information. In an embodiment, the latter are also expressed in the form of binary coded decimal digits, which encode the qualities. But, the fraud scenario rules are in terms of vectors. Thus, the analysis section AS1 converts the quantitative and encoded qualitative information of the X-record into corresponding vectors.

In this embodiment, the method is based on two separate procedures. In the simplest of cases, a quantitative value is compared against some threshold values (which are conveniently arranged to be adjustable), in a simple equation or

inequality expression. For example, consider the information element called "call duration" which is expressed in the record in terms of seconds. This needs to be vectorized to just two vectors, short and long. It is done in the following expression, which is executed during the analysis procedure.

If call duration $\leq t1$ then short.

If call duration $> t2$ then long.

The thresholds $t1$ and $t2$ are adjustable, which makes the definition of short and long relative.

In an embodiment, the analysis section AS1 reduces the information elements of an X-record to vectors in this rule based manner. For some others, especially the telephone numbers, the analysis section AS1 refers to the fraud intelligence unit FI1 database in order to derive its vectors. For example, the analysis section may consider a typical originating number on an X-record. To determine if this is a PBX number, it queries the FIU if this is on the list of suspected ANI's. It also determines if the originating number on the X-record is from a suspicious calling area from where a large number of fraud calls are made by referring to the FIU FI1. The analysis unit AS1 obtains such information by a query to the fraud intelligence unit FI1 database. The information is found there, because it was entered there previously.

Further, it determines if the originating number is a repeating originating number of many calls which have been made within the last 4 hours by searching through the record of the buffer section RBS1. It determines if this is "Using repeated ANI". The analysis unit AS1 derives this vector by matching the same originating number in many of the records which are in the RBS1. If the number of occurrences exceed a threshold $N1$ it is significantly repeating. This search and match operation is carried out to obtain vectors which are needed before the rules for multiple call fraud events are applied.

Thus, in this embodiment, by repeated application of these steps to the information elements of the X-record, the analysis unit AS1 converts the records to vectors. In addition to the vectors, the analysis unit AS1 retains some of the information elements from the original X-record as they are. These are:

Record ID

Call ID

Toll Switch ID

Originating number

Dialed number

Terminating number

Authorization code.

19 MAY 1998

These numbers are used in post detection actions of prevention, and record keeping procedures. These are retained in addition to their vector forms. All others are used in their vector form only.

As stated, the rules section RS1 classifies fraud events into two classes called a single call event and a multiple call event. The single call event requires the analysis of the information elements in the record of a single call only. For example, a record may bear the following information:

International call

Call made from a PBX

Long duration call

Off-business hour call

Terminating in a high fraud country.

This scenario does not need the information contained in any other records to declare that this record represents a fraud event. FIGS. 3 to 6 describe many scenarios of single call fraud events which the rules section RS1 includes in its repertoire.

Multiple call fraud events require the information carried on more than one record. The rule which describes such an event in the rules section RS1 will contain vectors which refer to characteristics which can only be derived from analyzing and comparing several records.

The rules section RS1 derives these characteristics by the analysis and comparison of many records. FIGS. 7 to 12 contain examples of fraud scenarios of this class. In general, this class represents the more difficult to detect fraud events. A 4 hour storage requirement of the RBS1 is used for the detection of this class of events. This chronological store of records allows the rules section RS1 to perform the required comparison among the collected records to detect such events. However, records of time durations, such as 2 to 8 hours, may also be used.

The rules depicted in the FIG. 13 cover a large number of rules of both these classes and enable the detection system to be capable of detecting most of the commonly committed fraud acts. In the figure, the vectors of the rules are represented as a list implying that they all must be present concurrently to make the rule "true". In other words, the "AND" designation of the boolean expression has been dropped. Additions and deletions to the rules may be made with ease to give high flexibility to the process.

To disconnect a call, the fraud containment section FC1 responds to the action priority from the rules section RS1 and sends a message to the signal transfer points STP1 and STP2. The section FC1 gives the identity of the switch and the call which originated there, along with a command which makes the switch operate as if the call has been

terminated by the called party. This causes the switch to disconnect the call and go through all the normal procedures which accompany the termination of a call. Thus the fraud caller will experience a hang-up in the middle of a call. If a second call from that telephone is initiated, that call will be treated by blocking as for the case HHb.

In the switch network TSN, signal transfer points STP respond to the fraud control section to operate on originating and terminating action control points ACPO and ACPT which disconnect calls coming from an access demand source ADS and going to an egress EGR. In the switch network TSN, signal transfer points STP coact with network control points NCP to operate on originating and terminating action control points ACPO and ACPT which block calls coming from an access demand source ADS and going to an egress EGR. Call data may pass directly between the originating access control points ACPO and ACPT and the fraud intelligence unit FI1.

The basic nature of the detection process which is employed is that of an expert system which employs recognition of the various elemental characteristics of the phenomenon which is to be detected. It is rule-based and heuristic in nature, as opposed to mathematical methods based on statistical parameters and multidimensional representations. The heuristic method of the invention, is very flexible, adaptable, and is not based on statistical studies of the fraud events. Natural neural systems, which are the result of millions of years evolution, are based on similar heuristic strategies, in which the incoming information is filtered to obtain a finite set of characteristics and building up more complex composites from them, which act as templates for matching and final detection.

Short calls cannot be detected until after termination. The CDRPs transmit short calls to the control system CS1 immediately after termination.

In an embodiment, the fraud intelligence unit includes a processor that organizes the database to deal with query and response from the control system CS1.

The information to the FIU FI1 is initially entered manually on the basis of prior fraud cases. To provide the fraud intelligence unit FI1 with further initial information, the control system CS1 is then set in a "training mode" before it is fully deployed. In this mode, the control system is inhibited from executing any preventive actions, but freely detects fraud events. In this mode, it adds to the initial human input by pumping important intelligence data to the database of the fraud intelligence unit FI1. This data can be carefully monitored and used for detection, when fully deployed. When fully deployed, the control system CS1 updates the database of the fraud intelligence unit FI1 with information on new fraud events.

To increase the flexibility of the detection process, any information which is considered as contributing to increase the certainty of detection can be stored in the fraud intelligence unit FI1 database and referred to at the time of analysis. No restrictions based on mathematical consistency need apply.

The Control System CS1 can be located centrally or in a distributed manner as one per switch office, according to the economics and performance requirements of the telephone switching network TSN. In either case, it is situated conveniently to collect call detail records from all the toll switches of the telephone switching network TSN.

In the embodiment of FIG. 1, the call detail records are arranged to be collected from the switches ACPO and ACPT via their CDRPs RP1 and RP2 and RP2. The records are collected in real time, which means that the data about a call are available at the control system CS1 while the call is still in progress. Continuous elapsed time data is made available for calls which are in progress. In the case of very short calls the data on the calls are collected immediately thereafter.

From a very high level point of view, the main functions of the control system CS1 are to:

- (1) detect fraud events by analyzing call records,
- (2) execute actions as indicated by action priorities, and
- (3) communicate as needed with the CDRPs, the database of the fraud intelligence unit FI1, and the corporate security administration monitor CSAM.

The real-time operating system of the control system CS1 performs the first two functions in a cyclic fashion and the third one on a on-demand or needed basis. The detection, the execution of actions, and the presentation of information to the corporate security administration monitor CSAM takes place in a cyclic fashion, whereas the CDRPs RP1 and RP2 and RP2 and the corporate security administration monitor CSAM are serviced as they interrupt the control system CS1 with a demand for service. The control system CS1 will query the database of the fraud intelligence unit FI1, as required in the analysis of the call detail information contained in the call records, during the detection process.

In FIGS. 3 to 13, the rules are arranged in a pyramidal fashion, moving from a very general scenario to more and more defined and restrictive scenarios. The more restricted the scenario is, the higher is the detection certainty that the event is fraudulent.

In an embodiment, to block a call, the fraud containment section FC1 responds to the action priority from the rules section RS1 and sends a special message to the signal transfer point STP1. The message contains a command to block the next call from a specified ANI. The STP signal transfer point STP1 will distribute this command to the

correct Network Control Point NCP, which handles the call processing of all business service calls. The network control point NCP will then, divert the call to a ring busy terminal, which will frustrate the caller's attempt to use the network.

In step 1437, the fraud containment section FC1 acts to disconnect the caller and block the next call from the caller. According to an embodiment of the invention, the next call is not blocked.

According to an embodiment of the invention, the FIU FI1 contains a processor which performs the matching functions with data from the analysis section AS1.

While embodiments of the invention have been described in detail, it will be evident to those skilled in the art that the invention may be embodied otherwise without departing from its spirit and scope.

What is claimed is:

1. A method of controlling access of a user to a telephone network, comprising the steps of:

storing, in a control data base, a set of attributes concerning an ongoing incoming call from an access demand source by a user;

maintaining a rules data base of a plurality of rules designating one of a plurality of degrees of likelihood that any call having a particular attribute is fraudulent, some of said degrees being high and some being lower;

determining whether an attribute in the data of the control data base matches an attribute in one of the plurality of rules in the rules data base; and

effecting corrective action in response to a match between data in the control data base and predetermined rules in the rules data base on the basis of the degree of likelihood indicated by the matching in the rules data base that the call is fraudulent;

the step of storing in the control data base including storing in a first access data base a first set of attributes concerning the ongoing incoming call;

the step of storing in the control data base including storing in a second access data base a second set of attributes concerning the history of prior accesses made by the access demand source;

the step of determining whether data in the one of the access data bases matches the rules in the rules data base including determining whether to disconnect the incoming call, block future incoming calls, or take other action; and

the step of effecting corrective action including disconnecting the incoming call, blocking future incoming calls, or taking other action;

the step of storing in the second access data base including updating the second access data base with data from incoming calls having matches in the determining step.

2. A method as in claim 1, wherein the step of effecting corrective action includes ignoring matches of attributes in the control data base and the rules data base when the attribute in the rules data base indicates a lower degree of likelihood that the call may be fraudulent.



3. A method as in claim 2, wherein said step of storing in said first access data base includes storing one or more of the following attributes:

- requesting user;
- request time;
- length of use;
- destination requested;
- user authorization code;
- whether use request is cellular.

4. A method as in claim 1, wherein said step of storing data in said second access data base includes storing one of the following:

- PBX ANIs (Private Branch Exchange Automatic Number Identifications);

- University PBX's and Centrex's;

- Suspicious NPAs-NXX (pay phones indicated by ii digits) for originating numbers;

- Suspicious Terminating Numbers;

- Known bad ANIs;

- Suspicious Country codes;

- Forbidden country codes;

- Compromised Authorization Codes;

- ANI's from detected fraud events;

- Originating numbers from detected fraud events;

- Terminating numbers from detected fraud events;

- Authorization codes from detected fraud events;

- Other files as required by CSAM (Telephone Corporation Security Administration Monitor).

5. A method as in claim 4, wherein said step of storing in said first access data base includes storing one or more of the following attributes:


- requesting user;
- request time;
- length of use;
- destination requested;
- user authorization code;
- whether use request is cellular.

6. A method as in claim 1, wherein the data in said rules data base includes incoming calls made:



During business hours;
 During non-business hours;
 Excessively long;
 Domestic accesses;
 To a limited dialed NPA=800;
 To a termination number=CPE;
 To a country code;
 ANI=CPE (Automatic Number Identification with Customer Premises Equipment);
 Accesses using SDN-NRA (Software Defined Network—Network Remote Access);
 To a suspected country code;
 Using a bad ANI;
 Of short duration;
 Using repeated ANI;
 From non-frequent caller;
 To successive different dialed numbers;
 Using suspected patterned dialing;
 With a connect time difference using a less than PDD (Post Dialing Delay)+e, i.e. going from one to another number quickly;
 Using an invalid authorization code;
 With a number of accesses in repeat set greater than threshold;
 Using a SDN Software defined network (virtual private network);
 Using different ANI to same termination No.;
 Using the same authorization code from another location greater than at least one incoming call continuing;
 Having greater than access duration overlap;
 With simultaneous use of mobile number;
 Cellular;
 Of the same MIN;
 Using distance between access locations/elapsed time greater than a given value τ ;
 Multiple from same ANI (Automatic Number Identification) greater than x;
 Repeated dialed numbers;



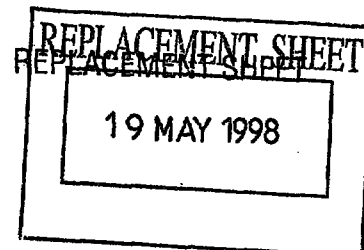


Terminating at a number which is a known DISA/RMATS
(Direct Inward Switched Access/Remote Maintained
Access Test System Maintained Port);
Originating in suspect MPA-NXX or pay phone;
Multiple incoming calls from same ANI;
CPE (Customer Premise Equipment) to a Known high
fraud country;
CPE (Customer Premise Equipment) to known medium
fraud country;
Non CPE type of service;
Suspicious terminating number;
Multiple incoming calls billed to same number;
Multiple 800 incoming calls exceeding preset number.
7. A method as in claim 1, wherein the data in said rules
data base includes access demands made:
During business hours;
During non-business hours;
Excessively long;
Domestic incoming calls;
To a limited dialed MPA=800;
To a termination number=CPE;
To a country code;
ANI=CPE (Automatic Number Identification with Customer
Premises Equipment);
Accesses using SDN-NRA (Software Defined Network—
Network Remote Access);
To a suspected country code;
Using a bad ANI;
Of short duration;
Using repeated ANI;
From non-frequent accesser;
To successive different dialed numbers;
Using suspected patterned dialing;
With a connect time difference using a less than PDD
(Post Dialing Delay)+e, i.e. going from one to another
number quickly;
Using an invalid authorization code;
With a number of accesses in repeat set greater than
threshold;



- Using a SDN Software defined network (virtual private network);
- Using different ANI to same termination No.;
- Using the same authorization code from another location greater than at least one access continuing;
- Having greater than access duration overlap;
- With simultaneous use of mobile number;
- Cellular;
- Of the same MIN;
- Using distance between access locations/elapsed time greater than a given value τ ;
- Multiple accesses from same ANI (Automatic Number Identification) greater than x ;
- Repeated dialed numbers;
- Terminating at a number which is a known DISA/RMATS (Direct Inward Switched Access/Remote Maintained Access Test System Maintained Port);
- Originating in suspect MPA-NXX or pay phone;
- Multiple accesses from same ANI;
- CPE (Customer Premise Equipment) to a Known high fraud country;
- CPE (Customer Premise Equipment) to known medium fraud country;
- Non CPE type of service;
- Suspicious terminating number;
- Multiple accesses billed to same number;
- Multiple 800 accesses exceeding preset number.
- 8. A system controlling access of a user to a telephone network, comprising:
 - a control data base with a set of attributes concerning an ongoing incoming call from an access demand source;
 - a rules data base with a plurality of rules designating one of a plurality of degrees of likelihood that any call having a particular attribute is fraudulent, some of said degrees being high and some being lower;
 - means for determining whether an attribute in the data in the control data base matches an attribute in the plurality of rules in the rules data base; and
 - means for effecting corrective action in response to a match between data in the control data base and pre-determined rules in the rules data base on the basis of



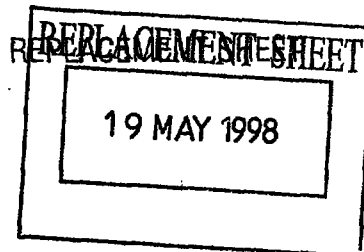

- the degree of likelihood indicated in the rules database that the call is fraudulent;
 - the control data base including a first access data base with a first set of attributes concerning the ongoing incoming call;
 - the control data base including a second access data base with a second set of attributes concerning the history of prior accesses made by the access demand source;
 - the means for determining whether data in the one of the access data bases matches the rules in the rules data base including means for determining whether to disconnect the incoming call, block future incoming calls, or take other action; and
 - the means for effecting corrective action including means for disconnecting the incoming call, blocking future incoming calls, or taking other action;
 - the control data base including means for updating the second access data base with data from accesses having matches in the means for determining.
9. A system as in claim 8, wherein the means for effecting corrective action includes ignoring matches of attributes in the control data base and the rules data base when the attribute in the rules data base indicates a lower degree of likelihood that the call may be fraudulent.
10. A system as in claim 9, wherein said first access data base includes data on one or more of the following attributes:
- requesting user;
 - request time;
 - length of use;
 - destination requested;
 - user authorization code;
 - whether use request is cellular.
11. A system as in claim 8, wherein said second access data base includes data on one of the following:
- PBX ANIs (Private Branch Exchange Automatic Number Identifications);
 - University PBX's and Centrex's;
 - Suspicious NPAs-NXX (pay phones indicated by ii digits) for originating numbers;
 - Suspicious Terminating Numbers;



Known bad ANIs;
Suspicious Country codes;
Forbidden country codes;
Compromised Authorization Codes;
ANI's from detected fraud events;
Originating numbers from detected fraud events;
Terminating numbers from detected fraud events;
Authorization codes from detected fraud events;
Other files as required by CSAM (Telephone Corporation Security Administration Monitor).

12. A system as in claim 11, wherein said storage in said first access data base includes storage for one or more of the following attributes:

requesting user;
request time;
length of use;
destination requested;
user authorization code;
whether use request is cellular.

13. A system as in claim 12, wherein the data in said rules data base includes data concerning one of the following types of accesses:

During business hours;
During non-business hours;
Excessively long;
Domestic accesses;
To a limited dialed MPA=800;
To a termination number=CPE;
To a country code;
ANI=CPE (Automatic Number Identification with Customer Premises Equipment);
Accesses using SDN-NRA (Software Defined Network—Network Remote Access);
To a suspected country code;
Using a bad ANI;
Of short duration;
Using repeated ANI;
From non-frequent accesser;
To successive different dialed numbers;




19 MAY 1998

24

Using suspected patterned dialing;
 With a connect time difference using a less than PDD
 (Post Dialing Delay)+e, i.e. going from one to another
 number quickly;
 Using an invalid authorization code;
 With a number of accesses in repeat set greater than
 threshold;
 Using a SDN Software defined network
 (virtual private network);
 Using different ANI to same termination No.;
 Using the same authorization code from another
 location greater than at
 least one access continuing;
 Having greater than access duration overlap;
 With simultaneous use of mobile number;
 Cellular;
 Of the same MIN;
 Using distance between access locations/elapsed time
 greater than a given value τ ;
 Multiple accesses from same ANI (Automatic Number
 Identification) greater than x ;
 Repeated dialed numbers;
 Terminating at a number which is a known DISA/RMATS
 (Direct Inward Switched Access/Remote Maintained
 Access Test System Maintained Port);
 Originating in suspect MPA-NXX or pay phone;
 Multiple accesses from same ANI;
 CPE (Customer Premise Equipment) to a known high
 fraud country;
 CPE (Customer Premise Equipment) to known medium
 fraud country;
 Non CPE type of service;
 Suspicious terminating number;
 Multiple accesses billed to same number;
 Multiple 800 accesses exceeding preset number.
 14. A system as in claim 8, wherein rules data base
 includes storage of access demands made:
 During business hours;
 During non-business hours;




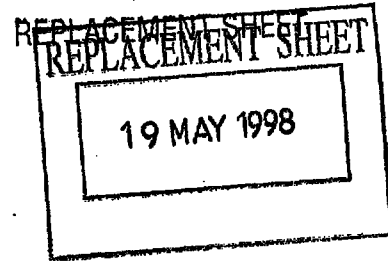

Excessively long;
 Domestic accesses;
 To a limited dialed MPA=800;
 To a termination number=CPE;
 To a country code;
 ANI=CPE (Automatic Number Identification with Customer Premises Equipment);
 Accesses using SDN-NRA (Software Defined Network—Network Remote Access);
 To a suspected country code;
 Using a bad ANI;
 Of short duration;
 Using repeated ANI;
 From non-frequent accesser;
 To successive different dialed numbers;
 Using suspected patterned dialing;
 With a connect time difference using a less than PDD (Post Dialing Delay)+e, i.e. going from one to another number quickly;
 Using an invalid authorization code;
 With a number of accesses in repeat set greater than threshold;
 Using a SDN Software defined network (virtual private network);
 Using different ANI to same termination No;
 Using the same authorization code from another location greater than at least one access continuing;
 Having greater than access duration overlap;
 With simultaneous use of mobile number;
 Cellular;
 Of the same MIN;
 Using distance between access locations/elapsed time greater than a given value τ ;
 Multiple accesses from same ANI (Automatic Number Identification) greater than x;
 Repeated dialed numbers;



Terminating at a number which is a known DISA/RMATS
(Direct Inward Switched Access/Remote Maintained
Access Test System Maintained Port);
Originating in suspect MPA-NXX or pay phone;
Multiple accesses from same ANI;
CPE (Customer Premise Equipment) to a Known high
fraud country;
CPE (Customer Premise Equipment) to known medium
fraud country;
Non CPE type of service;
Suspicious terminating number;
Multiple accesses billed to same number;
Multiple 800 accesses exceeding preset number.



19 MAY 1998


27

METHOD AND MEANS FOR PREVENTING FRAUDULENT USE OF TELEPHONE NETWORK

ABSTRACT

Access of a user to a resource, such as a telecommunications network, includes storing, in a first call data base, a first set of attributes concerning an ongoing call from a caller. A second call data base stores a second set of attributes concerning the history of prior calls made by the caller. A rules data base stores rules concerning attributes for determining whether to disconnect the call, block future calls, or take other action. A determination is made whether data in at least one of the call data bases matches the rules in the rules data base. The call is then disconnected, the next call blocked, or other action is taken, in response to a match between data the call data bases and data in the rules data base. Preferably, the second call data base is updated in response to matches with the rules data base.


FIG. 1

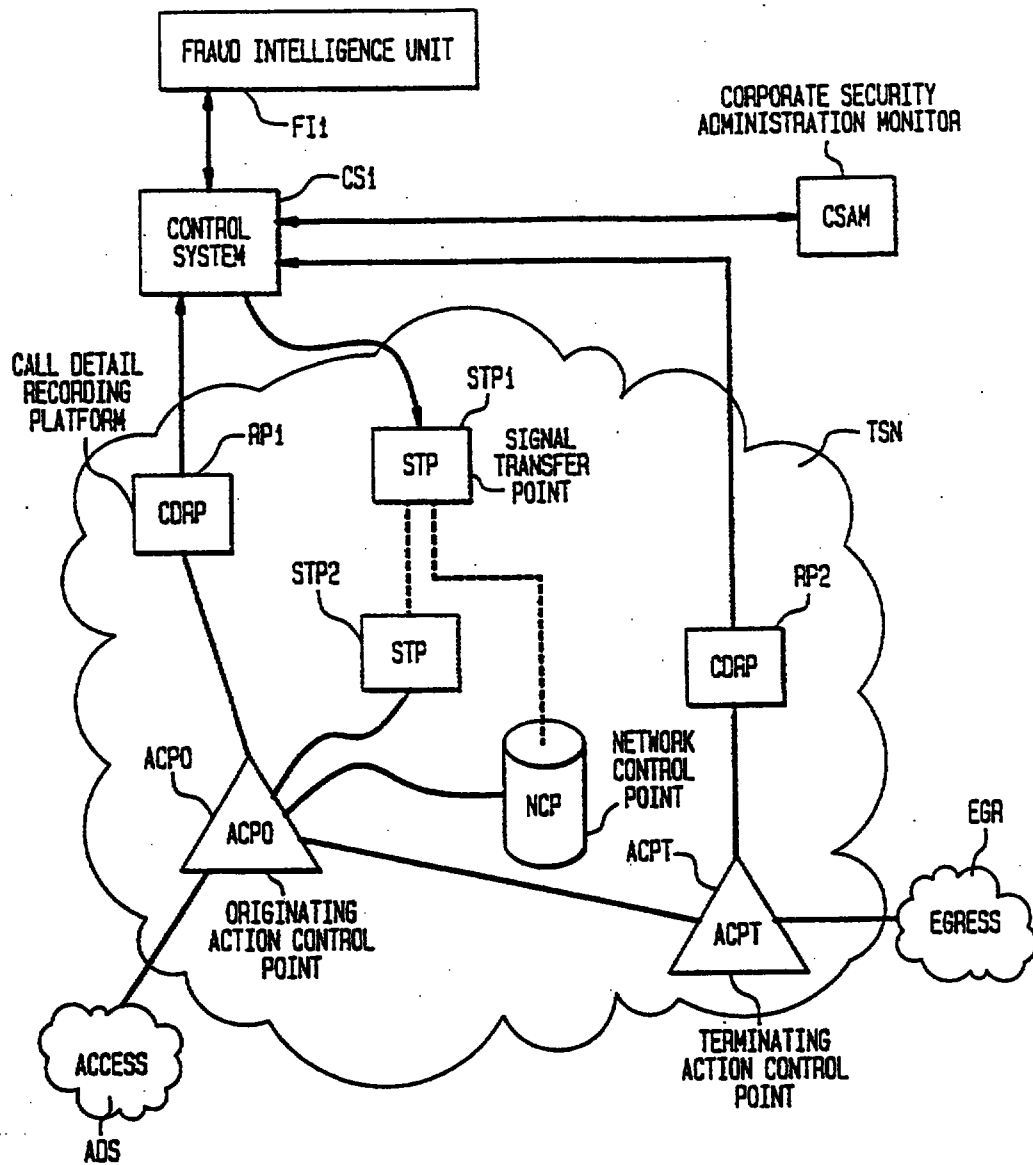

19 MAY 1998

2

FIG. 2

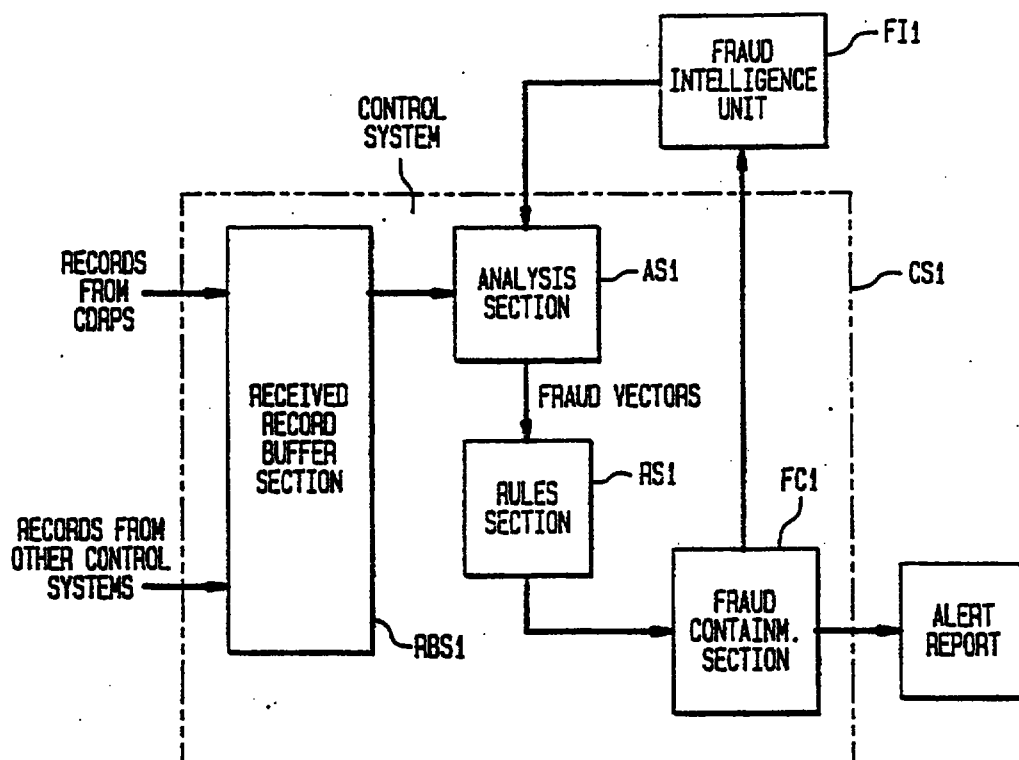

3

FIG. 3

CHARACTERISTICS	ACTION PRIORITY	
NON. BUS. HRS. LONG INTERNATIONAL	L	310
NON. BUS. HRS. LONG DOMESTIC	L	314
NON. BUS. HRS. LONG DIALED NPA = 800	L	317
NON. BUS. HRS. LONG DIALED NPA = 800 TERMINATION # = CPE (ADD EXCLUSION)	L	320
NON. BUS. HRS. LONG DIALED NPA = 800 TERMINATION # = CPE II DIGITS (COCOTS = 07)	M	324
NON. BUS. HRS. LONG INTERNATIONAL BAD ANI (GET THE LIST FROM CASE MGMT)	M	327
NON. BUS. HRS. LONG INTERNATIONAL SUSP. ANI_NPA-NXX)	L	330
NON. BUS. HRS. LONG INTERNATIONAL ANI = CPE FORBIDDEN CC (CUST. DOESN'T ALLOW)	HHa	334
NON. BUS. HRS. LONG INTERNATIONAL ANI = CPE SUSP. CC (OR NOT CALLED BEFORE)	M, L	337

19 MAY 1998

4

FIG. 4

CHARACTERISTICS	ACTION PRIORITY
REG. BUS. HRS. LONG INTERNATIONAL ANI = CPE FORBIDDEN CC (CUST. DOESN'T ALLOW)	HHa
REG. BUS. HRS. LONG INTERNATIONAL ANI = CPE SUSP. CC (OR NOT CALLED BEFORE)	M, L

FIG. 5

CHARACTERISTICS	ACTION PRIORITY
REG. BUS. HRS. LONG INTERNATIONAL SDN-NRA FORBIDDEN CC	HHa
REG. BUS. HRS. LONG INTERNATIONAL SUSP. ANI-NPA-NXX SDN-NRA SUSP. CC	H
REG. BUS. HRS. LONG INTERNATIONAL BAD ANI SDN-NRA	M
REG. BUS. HRS. LONG INTERNATIONAL BAD ANI SDN-NRA SUSP. CC	HH
NON. BUS. HRS. LONG SDN-NRA ACCESS OFF-NET DOMESTIC SUSP. ANI-NPA-NXX	L

19 MAY 1998

5

FIG. 6

CHARACTERISTICS	ACTION PRIORITY
SINGLE CALL EVENTS WITH CELLULAR CALLS.	
LONG CELLULAR INTERNATIONAL	L 610
LONG CELLULAR TERM # = CPE	M 614
LONG CELLULAR INTERNATIONAL SDN	M 617

FIG. 7

CHARACTERISTICS	ACTION PRIORITY
SHORT REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIFFERENT DIALED #	L 710
SHORT NON. BUS. HRS. REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIFFERENT DIALED # SUSP. ANI NPA-NXX	H 714
SHORT REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIALED NXX-XXXX PATTERNED	H 717

19 MAY 1998

6

FIG. 8

CHARACTERISTICS	ACTION PRIORITY	
SHORT NGN. BUS. HRS. REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 DIALED # PATTERNED SUSP. ANI NPA-NXX	HHb	810
SHORT REPEAT ANI NOT FREQUENT CALLER DIALED NPA = 800 CONNECT TIME DIFFERENCE $\leq$ POD + e (THIS IS COMPUTER HACKING SCENARIO)	H	814
HACKING FOR AUTHORIZATION CODE (AC)		817
SHORT REPEAT ANI NOT FREQUENT CALLER REPEAT 800 DIALED NUMBER (ACCESS) INVALID AC	H	820
SHORT REPEAT ANI NOT FREQUENT CALLER REPEAT 800 DIALED NUMBER (ACCESS) PATTERNED AC	HHb	824
ANI LOCKOUT FEATURE OF SDN THIS IS A CURRENTLY OFFERED SDN FRAUD PROTECTION FEATURE		827
SHORT REPEAT ANI NOT FREQUENT CALLER REPEAT 800 DIALED NUMBER (ACCESS) INVALID AC NUMBER OF CALLS IN REPEAT SET $\geq$ THRESHOLD	HHb	830

FIG. 9

CHARACTERISTICS	ACTION PRIORITY	
SIMULTANEITY OF CODES, MINS, ETC		910
SDN DIFFERENT ANI SAME AC > AT LEAST ONE CALL CONTINUING > (THIS FOR IN PROG CALLS AS IN KBS NETWORK) CALL DURATION OVERLAP (THIS FOR NetEXPERT)	H-H	914
SDN CELLULAR SAME MIN > AT LEAST ONE CALL CONTINUING > (THIS FOR IN PROG CALLS AS IN KBS NETWORK) CALL DURATION OVERLAP (THIS FOR NetEXPERT)	H-H	917
GEOGRAPHIC REASONABLENESS		920
CELLULAR MULTIPLE CALLS SAME MIN (DIST. BETWEEN CALL ORIG. LOCATIONS) / (ELAPSED TIME) >= THRESHOLD	H-H	924

19 MAY 1998

8

FIG. 10

CHARACTERISTICS	ACTION PRIORITY	
LONG BUSINESS HOURS MULTIPLE CALLS (THRESHOLD TBD) SINGLE ANI ORIGINATING 800 OR I/800 CALLS SAME DIALED NUMBER TERMINATING NUMBER NOT KNOWN TO BE DISA/RMATS	M	1010
LONG BUSINESS HOURS MULTIPLE CALLS (≥ 5 PER HR. SUGG. THRESHOLD) MULTIPLE ANI ORIGINATING 800 OR I/800 CALLS SAME DIALED NUMBER TERMINATING NUMBER NOT KNOWN TO BE DISA/RMATS	M	1014
LONG BUSINESS HOURS MULTIPLE CALLS (≥ 5) SINGLE ANI ORIGINATING OR MULT. ANI ORIGINATING 800 OR I/800 CALLS SAME DIALED NUMBER TERMINATING NUMBER KNOWN DISA/RMATS	H	1017
LONG BUSINESS HOURS MULTIPLE CALLS (≥ 2) SINGLE ANI ORIGINATING OR MULT. ANI ORIGINATING 800 OR I/800 CALLS ORIGINATING IN SUSP. NPA-NXX OR PAYPHONE (INDICATED BY 11 DIGITS = 07) SAME DIALED NUMBER TERMINATING NUMBER KNOWN DISA/RMATS OR NOT KNOWN	H	1020

19 MAY 1998

9

FIG. 11

CHARACTERISTICS	ACTION PRIORITY	
LONG BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI KNOWN CPE OF CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THE THRESHOLD - NUMBER OF CALLS - IS COUNTRY SPECIFIC)	H	1110
LONG BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI NON CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THE THRESHOLD IS COUNTRY SPECIFIC)	H	1114
LONG OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI KNOWN CPE OR CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THRESHOLD IS COUNTRY SPECIFIC AND LOWER THAN THE THRESHOLD FOR THE CORRESPONDING RULE FOR BUSINESS HOURS CALLS)	H	1117
LONG OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI NON CPE TYPE OF SERVICE INT'L CALL HIGH OR MEDIUM FRAUD COUNTRY (THRESHOLD IS COUNTRY SPECIFIC AND LOWER THAN THE THRESHOLD FOR THE CORRESPONDING RULE FOR BUSINESS HOURS CALLS)	H	1120

19 MAY 1998

10

FIG. 12

CHARACTERISTICS	ACTION PRIORITY	
LONG BUSINESS HOURS OR OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI CPE TYPE OF SERVICE OR KNOWN CPE DOMESTIC CALL SUSPICIOUS TERM. NO (BULLETIN BOARD, ETC. FROM NEGATIVE DATABASE OF TERM. NUMBERS)	H	1210
LONG BUSINESS HOURS OR OUT OF BUSINESS HOURS MULTIPLE CALLS FROM SAME ANI NON-CPE TYPE OF SERVICE DOMESTIC CALL SUSPICIOUS TERM. NO. (FROM NEGATIVE DATABASE OF TERMINATING NUMBERS)	L	1214

FIG. 13

CHARACTERISTICS	ACTION PRIORITY	
MULTIPLE CALLS (≥ 5) BILLED TO SAME NUMBER INTERNATIONAL CALLS HIGH OR MEDIUM FRAUD COUNTRY	H	1310
MULTIPLE COLLECT CALLS (≥ 5) TERMINATING AT SAME NUMBER INTERNATIONAL CALLS HIGH OR MEDIUM FRAUD COUNTRY	M	1314
MULTIPLE 1-800-ATT CALLS (≥ 5) FROM SAME ANI INTERNATIONAL CALLS HIGH OR MEDIUM FRAUD COUNTRY	H	1317
MULTIPLE CALLS (≥ 5) FROM SAME ANI ANI IN SUSPICIOUS NPA-NXXX BILL TO CARDS (SAME OR DIFFERENT) (0 + REPORT) SAME TERMINATING NUMBER TERMINATING NUMBER KNOWN DISA/RMATS	M	1320

11

FIG. 14

