



(51) International Patent Classification:
F16L 45/00 (2006.01) *B08B 9/04* (2006.01)

(21) International Application Number:
PCT/US2009/031543

(22) International Filing Date:
21 January 2009 (21.01.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/028,078 8 February 2008 (08.02.2008) US

(71) Applicant (for all designated States except US): **TDW DELAWARE, INC.** [US/US]; 1100 Market Street, Suite 780, Wilmington, Delaware 19801 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PRUETT, Rick D.** [US/US]; 219 North Pine, Oologah, Oklahoma 74053 (US).

(74) Agents: **ROSSLER, Paul, E.** et al.; Gable Gotwals, 100 West 5th Street, 10th Floor, Tulsa, Oklahoma 74103 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: VORTEX INHIBITOR DISPERSAL PIG

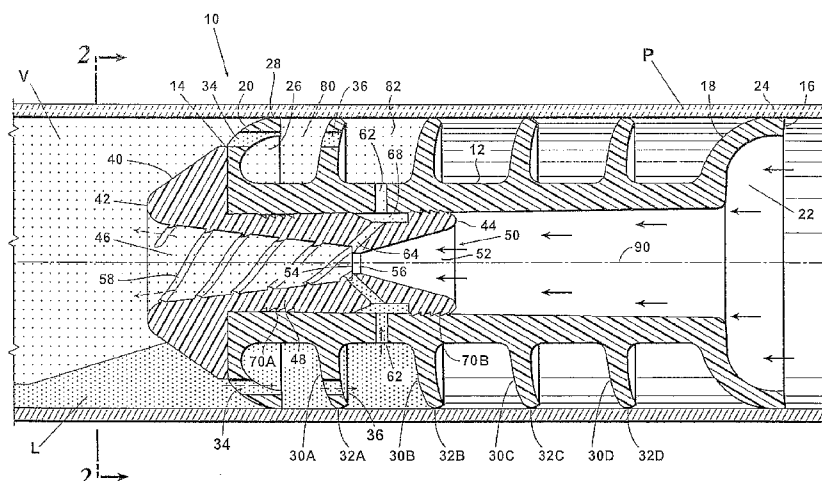


Fig. 1

(57) Abstract: A pipeline pig-that moves by pressurized gas flow and provides for distribution of treating liquid subsisting in a lower portion of a pipeline-having a longitudinally extending nozzle located at a forward end of the pig, an array of helical-shaped louvers located on the discharge side of the nozzle and arranged circumferentially, and two perforated sealing elements that create a cavity that serves as a low pressure plenum. The louvers create a vortex effect and the perforated sealing elements allow vapor and liquid in front of the pig to be drawn into the cavity and discharged through the ports and back into the discharge of the nozzle. In this manner, liquid subsisting at a bottom portion of the pipeline is dispersed to achieve a complete 360° coating application of the interior cylindrical wall of the pipeline.