

CONDUCTIVE PROBE FOR HEATING CONTACT LENS MOLD
ASSEMBLIES DURING DEMOLDING

1

BACKGROUND OF THE INVENTION

1. Field of the Invention


5 The present invention relates generally to a demolding arrangement for demolding cast lens mold assemblies wherein a molded assembly, comprising a frontcurve, a spaced backcurve, and a molded lens formed therebetween, are separated or demolded in a manner which improves the simplicity and efficiency of
10 the demolding operation.

More particularly, the subject invention pertains generally to an arrangement for producing ophthalmic contact lenses in cast contact lens mold assemblies, and providing for the improved removal of
15 molded ophthalmic contact lenses from the molds in which they are cast. The present invention is particularly well suited to molded ophthalmic lenses such as hydrogel contact lenses, although it also has applicability to other small, high-precision
20 ophthalmic lenses such as intraocular lenses.

Prior to the demolding operation in the casting of soft contact lenses, typically one of the lens mold surfaces is heated so as to cause the mold to release easily from the lens. The present
25 invention describes a conductive method of heating the noncritical side of a backcurve mold. The method entails the use of a convex contoured heated probe, either rigid or compliant, which contacts the noncritical side of a backcurve mold having a
30 similarly contoured concave shape. The present invention introduces a well defined heat pattern with

35

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

1 a favorable temperature gradient which represents an
advantage over other known prior art heated demolding
approaches.

2. Discussion of the Prior Art

5 As the ophthalmic lens industry has grown,
and in particular the industry related to supplying
contact lenses which are provided for periodic
frequent replacement, the number of contact lenses
required to be produced has increased dramatically.
This has spurred manufacturers to strive for automated
methods and apparatus which are adaptable to automated
10 practices and consistent performance.

It is generally known in the prior art to
make ophthalmic lenses, such as soft hydrogel contact
lenses, by molding a monomer or monomer mixture in a
mold such as one made from polystyrene or
15 polypropylene.

Examples of this prior art can be found in
U.S. Patents 5,039,459, 4,889,664 and 4,565,348.
These patents discuss therein the requirement for a
polystyrene mold in which the materials, chemistry and
20 processes are controlled such that the mold portions
do not require undue force to separate by sticking to
the lens or to each other. In contrast to the above
polystyrene molds, another example is the use of
polypropylene or polyethylene molds as described in
25 U.S. Patent 4,121,896.

The mold assembly to mold an ophthalmic
contact lens typically includes a lower concave mold
portion referred to as a frontcurve and an upper
convex mold portion referred to as a backcurve. The
30 concave surface of the lower frontcurve and the convex
surface of the upper backcurve define therebetween a

35 This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

1 mold cavity for a contact lens. A particular problem
in the prior art is that the frontcurve and backcurve
molds are usually surrounded by a flange, and the
monomer or monomer mixture is supplied in excess to
the concave frontcurve mold prior to the assembly of
the molds. As the molds are placed together, defining
5 the lens and forming an edge, the excess monomer or
monomer mixture is expelled from the mold cavity and
rests on or between the flange of one or both mold
portions. Upon polymerization, this excess material
forms an annular ring around the mold assembly which
10 resists separation of the mold portions during a
demolding operation.

In such contact lens manufacturing
processes, lens defects such as chips and tears as
well as missing lenses are believed to result, in
15 part, from the demolding operation. Much development
has been taken place on different mechanical
approaches for separating the mold halves. However,
the mechanical technique is only part of the process.
The method of heating the backcurve mold prior to
20 separation of the mold halves is also very critical.
In an ideal case, one wants to have concentrated heat
at the backcurve mold/lens interface and reduced heat
at the backcurve mold flange/polymer ring interface
and reduced heat at the frontcurve mold/lens
25 interface. Because the polymer (lens material)
releases easier from the polystyrene mold when heated,
an ideal system has the excess polymer ring attached
to the removed backcurve mold and the undisturbed lens
attached to the frontcurve mold.

30 One known prior art process for separating
the mold portions applies heat to the backcurve mold

35 This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

by a heated air stream. The heated air stream is directed against the exterior of the backcurve mold, from which heat is conducted to the upper surface of the lens. Heat is transferred by thermal conduction through the backcurve mold, the molded lens, and the frontcurve mold. The heating of the backcurve mold can be performed in two sequential steps, a preheat stage and a heat/pry stage. In the heat/pry stage the mold is clamped in place, and pry fingers are inserted under the flange of the backcurve mold. A force is then applied to the backcurve mold by the pry fingers during a heating cycle. When the required temperature has been reached, the backcurve mold breaks free and one end thereof is lifted by the pry fingers. After the backcurve mold portion has been detached from the frontcurve mold portion on at least one side, the mold exits the heater. The backcurve mold and annular flashing are then totally removed. Several notable disadvantages of this approach are a slow heat up time, a poorly defined application zone, and an inconsistent, inaccurate cavity-to-cavity energy transfer rate.

While the aforementioned method has some efficacy in assisting in the removal of a lens from between opposed mold portions, the temperature gradient achieved from the heated backcurve mold across the lens to the frontcurve mold is relatively small. This prior art method has not been entirely satisfactory because the induced thermal gradient is not sufficient to fully and repeatedly separate the mold portions.

Accordingly, a second prior art method has also been developed wherein the backcurve mold portion

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

is irradiated with electromagnetic radiation emanating from a laser, which is absorbed thereby to cause a
1 substantial temperature gradient between the backcurve mold portion and the contact lens being demolded. The temperature gradient causes a differential expansion and shifting of the surface of the heated backcurve
5 mold portion relative to the surface of the lens to lessen the adhesion therebetween to assist in the separation of the mold portions, while leaving the lens in the frontcurve mold portion. The backcurve mold portion is preferably irradiated by a laser
10 producing radiation with a wavelength between 1 μm and 20 μm . The separating fingers are joined together to form a U-shaped separator, and the laser beam is directed through the U opening in the U-shaped separator to irradiate the backcurve mold portion.
15 The one notable disadvantage of this approach is the cost of the laser units.

Steam heated demolding was also previously used in a production process. Notable disadvantages of this approach were issues surrounding the handling
20 of condensate on the backcurve mold and in the equipment, a long equipment heat up time, and complexity.

SUMMARY OF THE INVENTION

25 Accordingly, it is a primary object of the present invention to provide an improved demolding arrangement for cast lens mold assemblies which can easily and repeatedly separate the lens mold portions without damaging the lens formed therebetween.

30 A further object of the subject invention is the provision of an arrangement for separating a backcurve mold from a frontcurve mold of a contact

35 This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

lens mold assembly which improves the simplicity and efficiency of the demolding operation. In a preferred embodiment, a substantial temperature gradient is created between the backcurve mold and the contact lens formed in the cavity of the contact lens mold assembly.

Another object of the present invention is to provide an automated apparatus and method for demolding contact lens mold assemblies in a consistent and reliable manner, to thereby enhance the production of defect-free contact lenses, and minimize tearing of the lens and breakage of the lens mold parts.

The present invention presents a simple, easy to clean, low-cost, very repeatable, and unique conductive probe heating approach for assisting in separating or demolding cast contact lens mold assemblies. The conductive heating arrangement for contact lens demolding represents a distinctly unique approach relative to other prior art approaches used for similar purposes. Hot air and steam heating represent a convective heat transfer principle. Laser and infrared heating represent a radiation heat transfer principle. Thus, a concept representing a conductive heat transfer principle is unique.

In accordance with the teachings herein, the present invention provides apparatus for demolding a mold assembly, which includes a frontcurve mold having a central mold section with a surrounding flange, and a corresponding backcurve mold also having a central mold section with a surrounding flange, with a contact lens being molded therebetween. The flanges of the frontcurve and backcurve molds are spaced apart and parallel to each other. The demolding apparatus

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

includes a conductive heating probe which contacts the backcurve mold of the lens mold assembly to
1 conductively heat the backcurve mold. Heat is
conducted by the backcurve mold to cause a temperature
gradient between the backcurve mold and the lens being
demolded. The temperature gradient causes a
5 differential expansion and shifting of the surface of
the backcurve mold relative to the surface of the lens
to lessen the adhesion therebetween to assist in
separation of the molds, while leaving the lens in the
frontcurve mold.

10 In greater detail, The conductive heating
probe includes a convex heating surface which contacts
and is the same general shape as a concave surface on
the backcurve mold. The conductive heating probe can
also include a compliant heat conductor to conform to
15 the concave surface on the backcurve mold. The
compliant heat conductor can comprise a thin element
positioned on the end of the conductive heating probe.
The conductive heating probe can be spring mounted in
a support plate to spring bias the conductive heating
20 probe against the backcurve mold. Moreover, a spring
preload adjustor can be provided for adjusting the
preload bias on the spring of the conductive heating
probe. Alternatively, the free weight of the
conductive heating probe can provide the force to bias
25 the conductive heating probe against the backcurve
mold. The conductive heating probe can also include a
cartridge electrical heating element and a
thermocouple for detecting and controlling the
temperature of the conductive heating probe.

30 The demolding apparatus can include a
support pallet for supporting the mold assembly and a

35 This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

separating fixture for providing a separation force
between the spaced flanges of the frontcurve and
1 backcurve molds of the mold assembly.


The support pallet preferably supports a
plurality of mold assemblies arranged in an $n \times m$
array of mold assemblies. In those embodiments, the
5 apparatus can include a conductive heating probe
assembly having an $n \times m$ array of conductive heating
probes which contact each backcurve mold of the $n \times m$
array of mold assemblies, for conductively contacting
and heating the array of mold assemblies. A lift
10 cylinder raises and lowers the conductive heating
probe assembly relative to the support pallet. During
operation, the weights of the individual conductive
heating probes are maintained on the array of mold
assemblies during demolding to maintain the array of
15 mold assemblies properly positioned in the support
pallet during demolding. A lifting cam is provided to
lift the conductive probe assembly from the pallet
following demolding as an indexer conveys the pallet
past the assembly lifting cam.

20 BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing objects and advantages of the
present invention for a wedge demolding apparatus and
method may be more readily understood by one skilled
in the art with reference being had to the following
25 detailed description of several preferred embodiments
thereof, taken in conjunction with the accompanying
drawings wherein like elements are designated by
identical reference numerals throughout the several
views, and in which:

30 Figure 3 is a diagrammatic
representation of a wedge type demolding arrangement

35 This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

which utilizes a double-sided removal of a backcurve mold;

1 Figure 4 illustrates a first embodiment of a conductive heat probe for conductive contact heating of the backcurve of a lens mold assembly during demolding;

5 Figure 5 illustrates an embodiment of a free-weighted conductive heat probe assembly pursuant to the teachings of the subject invention;

 Figure 6 illustrates a front elevational view of another embodiment of a
10 conductively heated demolding apparatus; and

 Figures 7 and 8 are respectively front elevational and top plan views of the same embodiment of Figure 6 presented in an overall assembly view of the apparatus.

15 DETAILED DESCRIPTION OF THE DRAWINGS

 Referring to the drawings in detail, and in particular initially to Figures 1 and 2, Figure 1 illustrates a front elevational view of a support
20 pallet 10 which supports thereon an array, typically a two by four array, of contact lens mold assemblies 12, one of which is illustrated in further detail in Figure 2.

 Figure 2 is an enlarged side elevational and sectional view of one contact lens
25 mold assembly 12 which consists of a lower frontcurve mold 14 and an upper backcurve mold 16, which define therebetween a mold cavity for a contact lens 18.

 The frontcurve and backcurve mold halves 14 and 16 are preferably formed of polystyrene but could
30 be any suitable thermoplastic polymer which is sufficiently transparent to ultraviolet light to allow

35 This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

irradiation therethrough with light to promote the subsequent polymerization of a soft contact lens. A
1 suitable thermoplastic such as polystyrene also has other desirable qualities such as being moldable to surfaces of optical quality at relatively low temperatures, having excellent flow characteristics
5 and remaining amorphous during molding, not crystallizing, and have minimal shrinkage during cooling.

The frontcurve mold half 14 defines a central curved section with an optical quality concave
10 surface 20, which has a circular circumferential knife edge 22 extending therearound. The knife edge 22 is desirable to form a sharp and uniform plastic radius parting line (edge) for the subsequently molded soft contact lens 18. A generally parallel convex surface
15 24 is spaced from the concave surface 20, and an annular essentially uniplanar flange 26 is formed extending radially outwardly from the surfaces 20 and 24. The concave surface 20 has the dimensions of the frontcurve (power curve) of a contact lens to be
20 produced by the mold assembly, and is sufficiently smooth such that the surface of a contact lens formed by polymerization of a polymerizable composition in contact with the surface is of optically acceptable quality. The frontcurve mold half is designed with a
25 thickness, typically 0.8 mm, and rigidity effective to transmit heat therethrough rapidly and to withstand prying forces applied to separate the mold half from the mold assembly during a demolding operation. The frontcurve mold half 14 further defines a generally
30 triangular tab 28, integral with the flange 26 which projects from one side of the flange. Tab 28 is

This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

essentially uniplanar and extends to an injection hot
tip which supplies molten thermoplastic to form the
frontcurve mold half.

The backcurve mold half 16 defines a central
curved section with an optical quality convex surface
32, a generally parallel concave surface 34 spaced
from the convex surface 32, and an annular essentially
uniplanar flange 36 formed extending radially
outwardly from the surfaces 32 and 34. The convex
surface 32 has the dimensions of the rear curve (which
rests upon the cornea of the eye) of a contact lens to
be produced by the backcurve mold half, and is
sufficiently smooth such that the surface of a contact
lens formed by polymerization of a polymerizable
composition in contact with the surface is of
optically acceptable quality. The backcurve mold half
is designed with a thinness, typically 0.6 mm, and
rigidity effective to transmit heat therethrough
rapidly and to withstand prying forces applied to
separate the mold half from the mold assembly during
demolding. The backcurve mold half 16 also defines a
generally triangular tab 38, similar to the triangular
tab 28, integral with the flange which projects from
one side of the flange. The tab 38 extends to an
injection hot tip which supplies molten thermoplastic
to form the backcurve mold half.

During the process of molding a contact
lens, an excess amount of polymer or polymer mixture
is initially deposited in a frontcurve mold, and then
a backcurve mold is placed over the frontcurve mold
and pressed thereagainst. This results in excessive
polymer in the mold cavity being displaced and

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

discharged therefrom and forming an excess polymer ring 42 outside of the knife edge 22.


1 The flanges 26 and 36 are designed to assist
in demolding and part handling, and also protect the
optical surfaces and the knife edge. The geometry of
the triangular tabs 28 and 38 serves an additional
5 function in straightening and orienting the assembled
frontcurve/backcurve assembly 12 prior to demolding.
When a frontcurve mold half or curve 14 is assembled
with a backcurve mold half or curve 16, a gap 40 is
formed between the two spaced flanges and projecting
10 tabs which is important for demolding. The gap
between the tabs is preferably in the range of 1.0 mm-
3.0 mm, and is required to assist in the demolding
operation, as explained in greater detail hereinbelow.

Referring to Figures 1 and 2, the contact
15 lens mold assemblies 12 are supported in the pallet 10
with the annular flanges 26 and tabs 28 of the
frontcurve mold 14 recessed slightly below the upper
surface of the pallet 10. The annular flanges 36 and
tabs 38 of the backcurve mold 16 are raised above the
20 upper surface of the pallet, to allow a mechanical
separating member to be inserted between the spaced
flanges 26, 36 of the frontcurve and backcurve.

Figure 3 is a diagrammatic representation of
a wedge type demolding apparatus which utilizes a
25 double-sided removal of the backcurve mold. The
demolding apparatus illustrated in Figure 3 includes a
schematically illustrated mold pallet 10, a frontcurve
mold 14, a backcurve mold 16, and a demolding cam
wedge 44.

30 The demolding apparatus and process of
Figure 3 operates as follows.

This Sheet Has Been Replaced



STEP 1: The mold assembly 12, which includes the backcurve mold 16, the frontcurve mold 14, the lens 18 and the excess polymer ring 42, is heated (preferably from the top) at or immediately prior to step 1. The heating process can occur exclusively at step 1, or it may continue throughout the entire demolding operation. At the point illustrated in step 1, the wedge 44 does not stress the backcurve mold 16 and frontcurve mold 14, but is fully engaged in between the flanges 26 and 36 of the backcurve and frontcurve molds. Note that the wedge 44 does not interfere with the excess polymer ring 42 as such interference would cause a fouling condition which would render the process ineffective.

STEP 2: As shown in the top view, the pallet 10 and mold assembly 12 are moved by a product indexer or drive 46 to proceed along the wedges 44. The slope or cam angle of the wedge and/or the feed rate determine the rate of backcurve removal. A nonlinear wedge slope or cam angle and/or feed rate results in a nonlinear backcurve removal rate. The heating process also affects the acceptable removal rate. The amount of excess polymer 42 also influences the process conditions.

STEP 3: At this point, the mold assembly has been moved by the product indexer 46 to a point on the wedges 44 such that the backcurve mold 16 with the excess polymer ring 42 is completely separated from the frontcurve mold 14 and lens 18.

The required amount of separation or wedge height for effective demolding is dependent primarily upon the size of the excess polymer ring and the efficiency of the heating operation. A typical

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

embodiment would allow for more wedge height than is theoretically necessary to ensure complete mold removal. At this point or directly thereafter, the now separated backcurve mold 16 and polymer ring 42 are removed by an overhead vacuum take-away system 47 which deposits the backcurves in a waste container for recycling.

Figure 4 illustrates the basic components of a first embodiment of a conductive backcurve lens mold heater, and illustrates a contact lens mold assembly 12 seated in a typical support pallet 10. A spring loaded heat probe 50 with a compliant heat conductor 52 on the contoured end thereof contacts the mold assembly from above. Figure 4 shows the assembly in the heating mode. However, it should be apparent that when the lens mold assembly 12 and pallet 10 are moved downwardly, the probe 50 will extend downwardly under the bias of spring 54 until it hits internal stops at 56.

Figure 4 illustrates a cured contact lens 18 in a contact lens mold assembly 12 comprised of a frontcurve mold 14 and a backcurve mold 16, and an excess polymer ring 42. The heat probe 50 includes the compliant heat conductor 52, a thermocouple 58, and a cartridge heater 60. The assembly includes a spring pre-load adjustor 62 for spring 54, and is mounted in a top guide plate 64 and bottom guide fixture 66. The pre-load adjustor 62 is threadedly engaged to the probe 50 such that its position thereon, and the amount of pre-load supplied by the spring 54, is adjustable. The compliant heat conductor 52 includes a lower convex curved face having the same general shape as the internal concave

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

surface forming the back of the backcurve mold 16. The compliant heat conductor includes an annular inwardly extending projection 68 which fits into a corresponding recessed annular groove 70 near the lower end of the probe 50 to lock those elements together. Alternative embodiments of the heat probe 50 can omit the compliant heat conductor 52, in which case of the relatively rigid end of the heat probe 50 would be shaped to the same general shape as the internal concave surface on the back of the backcurve mold 16.

10 Functional steps


Step 1 The backcurve mold 14 and compliant conductor 52 begin the process not in contact. The cartridge heater 60 is heated by use of an appropriate electric control device and the thermocouple 58.

15 Step 2 As the lens mold assembly pallet 10 is raised, the compliant conductor 52 comes into contact with the backcurve mold 14.

Step 3 The lens mold assembly pallet 10 continues rising until the heat probe 50 has moved a sufficient distance such that spring 54 has supplied a desired contact force between the compliant conductor 52 and the backcurve mold 14.

20 Step 4 The assembly dwells in that position until such time as sufficient heat has conducted through the heat probe 50, the compliant conductor 52, and the backcurve mold 14 to raise the interface temperature between the backcurve mold and the cured contact lens to the desired level. The desired temperature is sufficiently high to allow easy release of the backcurve mold from the cured contact lens

This Sheet Has Been Replaced



without causing the cured contact lens to release from the frontcurve mold.

1 Step 5 The lens mold pallet 10 is then
lowered until contact between the compliant conductor
52 and the backcurve mold 14 is broken and there is
sufficient clearance to translate the lens mold
5 assembly pallet 10 with the mold assembly to a demold
station. An optional function is to begin the
demolding operation while the assembly is still in
step 4 above.

Key process related features and options

10 Heating In the embodiment described above
the source heat is an electric cartridge heater. In
alternate embodiments, the heat source could be steam,
hot water, RF, etc. Placement of the thermocouple may
be different from that in the illustrated embodiment,
15 and it does not have to be integral with the heater
cartridge. The method of controlling the heating is
important. It is believed that optimal demold
conditions exist in fairly narrow time/temperature
profiles. Therefore, for process consistency, a true
20 proportional fractional wave control may be
appropriate for the cartridge heater. For consistent
heat flow, potting of the heater cartridge may also be
appropriate. To minimize the temperature loss in the
heat probe between cycles, the thermal mass ($C_p \times$
25 Mass) of the heat probe should be maximized. Also,
the heat probe material should have a moderate to high
thermal conductivity.

A preferred embodiment of the compliant
conductor 52 comprises a high temperature molded
30 silicone piece with a contour on the external
contacting surface which closely matches the contour

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

of the noncritical core side of the backcurve mold. Other embodiments can include materials other than
1 silicone. The criteria for this component is that it have a sufficiently high thermal conductivity and
sufficiently high resistance to thermal degradation to transfer heat to the lens mold assembly effectively
5 while maintaining compliance and dimensional stability. The degree to which the dimensional stability and compliance are required is dependent upon the amount of contact force used. The higher the
contact force, the more important the contour of the
10 machined surface on the heat probe 50 becomes and the less important the contour of the compliant conductor becomes. To this end, an alternate embodiment can utilize a rigid conductor in which the lower end of the heat probe 50 is machined to directly match the
15 core side contour of the backcurve mold. If sufficient contact force is utilized, sufficient compliance exists in the backcurve mold itself to assure a low thermal resistance contact. Thus, a compliant conductor is not necessary in this
20 embodiment.

The diameter of the contacting end of the heat probe 50, either compliant or rigid, is an important design variable in that the heat should ideally be directed to the lens 18 and not to the
25 excess polymer ring 42. If the polymer ring receives too much heat it will tend to release from the backcurve mold during the demolding process which is undesirable. If the lens edge receives too much heat, it will tend to separate from the frontcurve during
30 demolding and cause edge defects and/or missing lenses. Optimization of the diameter along with other

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

process variables can maximize polymer ring removal rates while minimizing edge related defects in lenses and missing lenses.

Accordingly, the diameter of the contacting end of the heat probe 50 might be selected to be less than the diameter of a lens being demolded in some embodiments, and in other embodiments the diameter of the contacting end of the heat probe 50 might be greater than the diameter of a lens being demolded. Moreover, the geometry of the contacting end of the heat probe 50 might be selected to achieve particular heat transfer patterns. For instance, the end of the heat probe 50 might be annular shaped, such that heat is selectively transferred from the annular end to an annular area of the backcurve mold around the edge of the lens. Moreover, the heat probe might have a complex construction of several different materials, each having a selected thermal mass and thermal conductivity, to achieve different heating patterns and profiles across the backcurve mold and lens. For instance, the heat probe might be constructed with concentric rings of different materials of different thermal masses and thermal conductivities to achieve a desired complex heating pattern of the backcurve mold and lens.

Figure 5 illustrates an embodiment of a rigid conductor, free-weighted contact lens mold heater assembly 51 without springs 54. The heat probe 50 illustrated in Figure 4 is normally mounted in an assembly which includes an array of such heat probes mounted and positioned to correspond to an array of contact lens mold assemblies positioned in a support pallet, with such a heat probe assembly being

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED


illustrated in alternative embodiments in Figures 5 and 6-8. In the embodiment of Figure 5, the heat probes 50 are mounted free-weighted with a degree of lateral movement because the unit is designed to work with 8-cavity frame molds which preferably have large center-to-center tolerances.

Figure 6 illustrates a front elevational view of a conductively heated embodiment of a one sided wedge type demolding apparatus designed to utilize molds with reduced excess polymer rings 42. Figures 7 and 8 are respectively front elevational and top plan views of the same embodiment of Figure 6 presented in an overall assembly view of the apparatus.

The demolding arrangement illustrated in Figures 6, 7 and 8 includes a wedge assembly or fixture 80, comprised of a plurality of separating wedges 81, a moving support pallet 82, a vacuum take-away hood 84, a heat conductive probe assembly 86 having a 2 x 4 array of heat conductive probes 88, a heat conductive probe lifting cam 90, a conductive probe assembly lift cylinder 92, a pallet drive hydraulic cylinder 94, a process controller/timer 96, and hydraulic fluid reservoirs 98.

In operation, the heat conductive probe assembly 86 is lifted vertically by the lift cylinder 92 via the lifting cam 90 such that a mold frame assembly 64 can be placed into the support pallet 82 without interfering with the conductive probes 88. The conductive probe assembly 86 is then lowered by the lift cylinder 92 via the lifting cam 90 so that the conductive probes 88 are resting under their own

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

weight on the lens portions of the noncritical side of the backcurve molds 16.

1 At this point, heat is conducted through the
conductive probes 88 into the lens mold assemblies.
In operation, the conductive probes 88 have cartridge
heaters which are maintained at a specific
5 temperature. After a period of time programmed into
the process controller/timer 96 has elapsed, the
pallet 82 is moved in a right to left direction by the
hydraulic cylinder 94 which is fed from the reservoirs
98. The conductive probe assembly 86 is moved
10 simultaneously with the pallet 82 such that the weight
of the conductive probe assembly 86 remains fully on
the backcurve molds 16. After a given travel
distance, the backcurve mold excess polymer rings
begin separating by the cam or wedge profiling
15 associated with the wedge assembly 80. At a point
before full backcurve mold separation, the cam profile
on the conducting probe assembly lifting cam 90 lifts
the conductive probe assembly 86 and conductive probes
88 clear of the mold assemblies. As the pallet 82
20 continues leftward, the backcurves 16 separate
completely from the frontcurve frame 64 and are
vacuumed away by the vacuum take-away hood 84. The
pallet 82 then reaches its leftmost point and the
frontcurve mold frame 64 with lenses 18 is removed.
25 The unit is then reset and is ready for the next cycle
of operation.

One purpose of maintaining the conductive
probes 88 in contact with the backcurve molds 16
while the molds 16 are engaging the wedge assembly 80
30 is to provide and maintain a normal force on each
backcurve mold 16 to counteract a shear force

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

1

5

10

20

25



30

35

THIS SHEET HAS BEEN
REPLACED

WHAT IS CLAIMED IS:


1. Apparatus for demolding a lens mold
1 assembly, comprising a frontcurve mold which has a
central lens mold section with a surrounding flange,
and a corresponding backcurve mold which has a
5 central lens mold section with a surrounding flange,
and a molded ophthalmic lens which is formed between
the frontcurve and backcurve molds, and wherein the
flanges of the frontcurve and backcurve molds are
spaced apart relative to each other, comprising a
10 conductive heating probe which contacts the backcurve
mold of the lens mold assembly to conductively heat
the backcurve mold, in which heat is conducted by the
backcurve mold to cause a temperature gradient between
the backcurve mold and the lens being demolded, with
15 the temperature gradient causing a differential
expansion and shifting of the surface of the backcurve
mold relative to the surface of the lens to lessen the
adhesion therebetween to assist in separation of the
molds, while leaving the lens in the frontcurve mold.

2. Apparatus for demolding a mold assembly
20 as claimed in claim 1, wherein the conductive heating
probe includes a convex heating surface which contacts
and is the same general shape as a concave surface on
the backcurve mold.


3. Apparatus for demolding a mold assembly
25 as claimed in claim 2, wherein the conductive heating
probe includes a compliant heat conductor to conform
to the concave surface on the backcurve mold.

4. Apparatus for demolding a mold assembly
30 as claimed in claim 3, wherein the compliant conductor
comprises a thin element positioned on the end of the
conductive heating probe.

This Sheet Has Been Replaced



35



THIS SHEET HAS BEEN
REPLACED

1 5. Apparatus for demolding a mold assembly
as claimed in claim 1, wherein the conductive heating
probe is spring mounted in a support plate to spring
bias the conductive heating probe against the
backcurve mold.

5 6. Apparatus for demolding a mold assembly
as claimed in claim 5, including a spring preload
adjustor for adjusting the preload bias on the spring
of the conductive heating probe.

10 7. Apparatus for demolding a mold assembly
as claimed in claim 1, wherein the conductive heating
probe includes a cartridge electrical heating element.

15 8. Apparatus for demolding a mold assembly
as claimed in claim 1, wherein the conductive heating
probe includes a thermocouple for detecting and
controlling the temperature of the conductive heating
probe.

20 9. Apparatus for demolding a mold assembly
as claimed in claim 1, including a support pallet for
supporting the mold assembly and a separating fixture
positioned between the spaced flanges of the
frontcurve and backcurve molds of the mold assembly.

 10. Apparatus for demolding a mold assembly
as claimed in claim 9, wherein the support pallet
supports a plurality of mold assemblies.

25 11. Apparatus for demolding a mold assembly
as claimed in claim 10, wherein the support pallet
supports an n x m array of mold assemblies.

30 12. Apparatus for demolding a mold assembly
as claimed in claim 11, including a conductive heating
probe assembly, having an n x m array of conductive
heating probes therein, which contact each backcurve

This Sheet Has Been Replaced



35



THIS SHEET HAS BEEN
REPLACED

mold of the $n \times m$ array of mold assemblies, for
conductively heating the array of mold assemblies.

1 13. Apparatus for demolding a mold assembly
as claimed in claim 12, including a lift cylinder for
raising and lowering the conductive heating probe
assembly relative to the support pallet, and wherein
5 the weights of the individual conductive heating
probes are maintained on the array of mold assemblies
during demolding to maintain the array of mold
assemblies properly positioned in the support pallet
during demolding.

10 14. Apparatus for demolding a mold assembly
as claimed in claim 13, including a conductive probe
assembly lifting cam which lifts the conductive probe
assembly from the pallet after demolding as an
indexing means conveys the pallet past the conductive
15 probe assembly lifting cam.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

ABSTRACT OF THE DISCLOSURE

Demolding apparatus for reliably and
1 repeatedly mechanically separating contact lens mold
assemblies without damaging the contact lens formed
therebetween. The mold assembly includes a frontcurve
mold having a central mold section with a surrounding
5 flange, and a corresponding backcurve mold also
having a central mold section with a surrounding
flange, with a contact lens being molded therebetween.
The demolding apparatus includes a conductive heating
probe which contacts the backcurve mold of the lens
10 mold assembly to conductively heat the backcurve mold.
Heat is conducted by the backcurve mold to cause a
temperature gradient between the backcurve mold and
the lens being demolded. The temperature gradient
causes a differential expansion and shifting of the
15 surface of the backcurve mold relative to the surface
of the lens to lessen the adhesion therebetween to
assist in separation of the molds, while leaving the
lens in the frontcurve mold.
The conductive heating probe includes a convex heating
20 surface which contacts and is the same general shape
as a concave surface on the backcurve mold, and can
also include a compliant heat conductor to conform to
the concave surface on the backcurve mold. In one
embodiment, the apparatus includes a conductive
25 heating probe assembly having an $n \times m$ array of
conductive heating probes which contact each backcurve
mold of an $n \times m$ array of molds assemblies positioned
in a support pallet.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

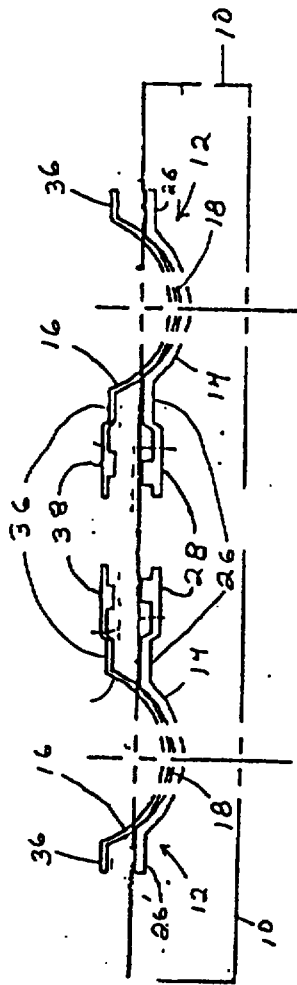


Fig. 1


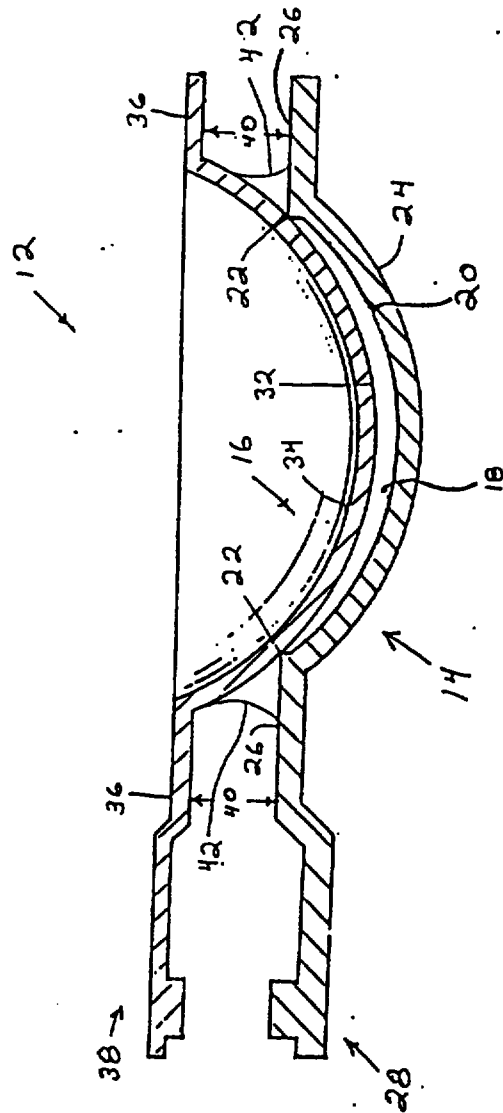


Fig. 2

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

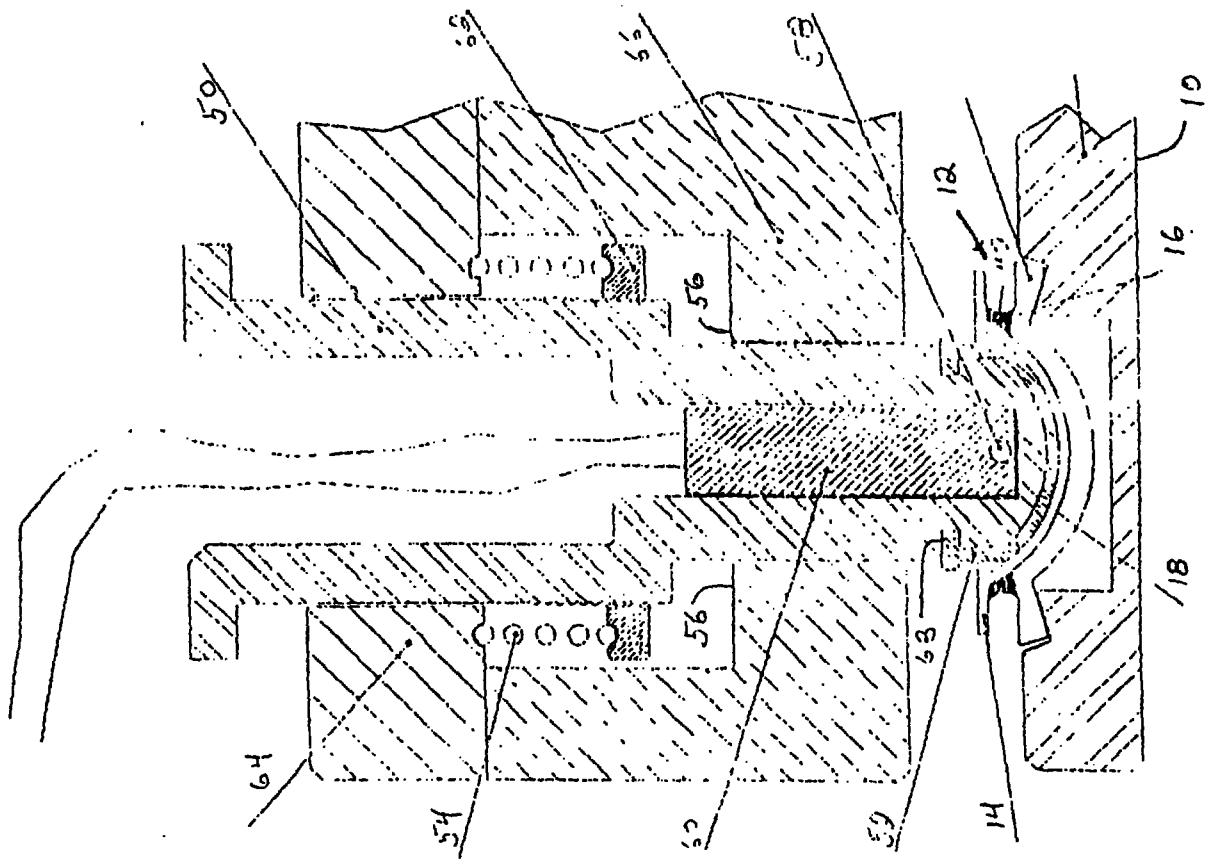


Fig. 4

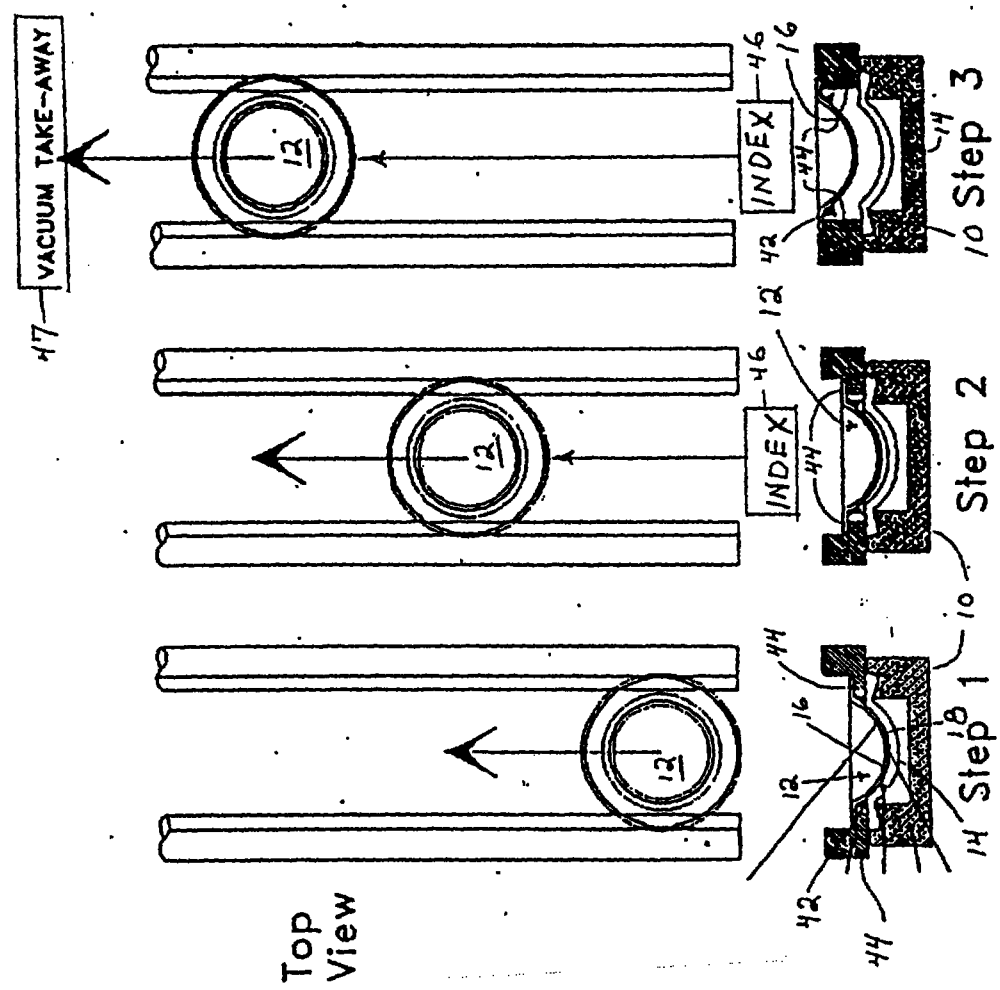


Fig. 3

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED



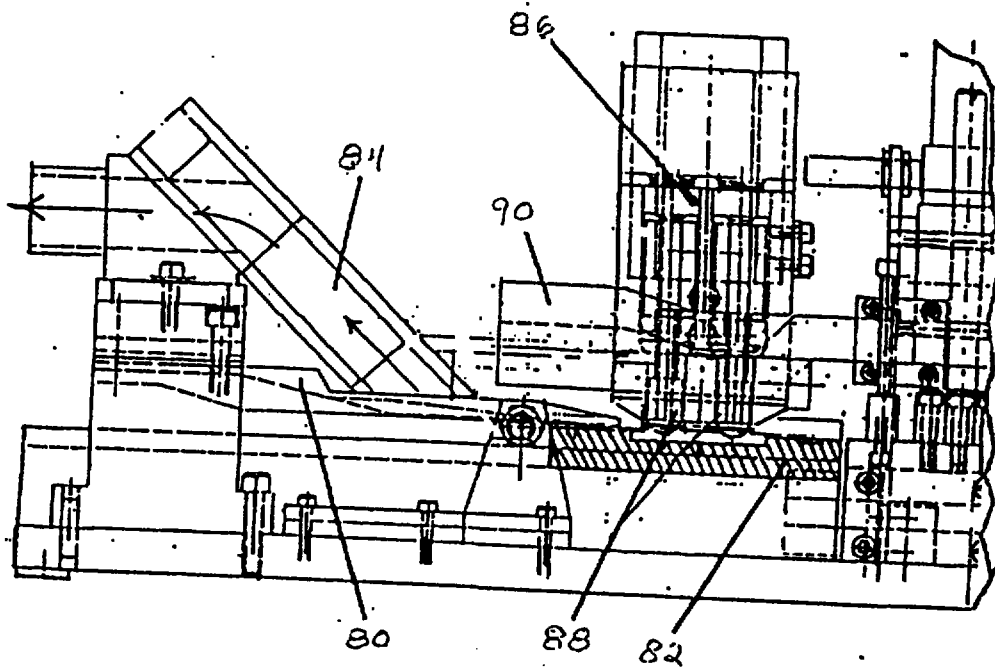


Fig. 6

This Sheet Has Been Replaced

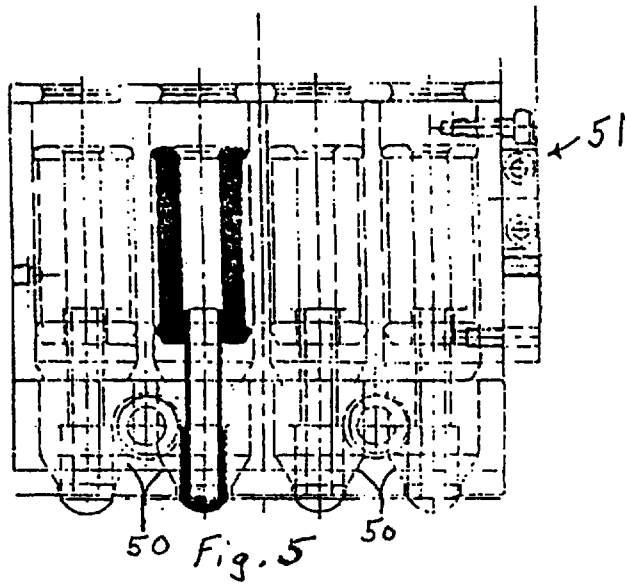

THIS SHEET HAS BEEN
REPLACED

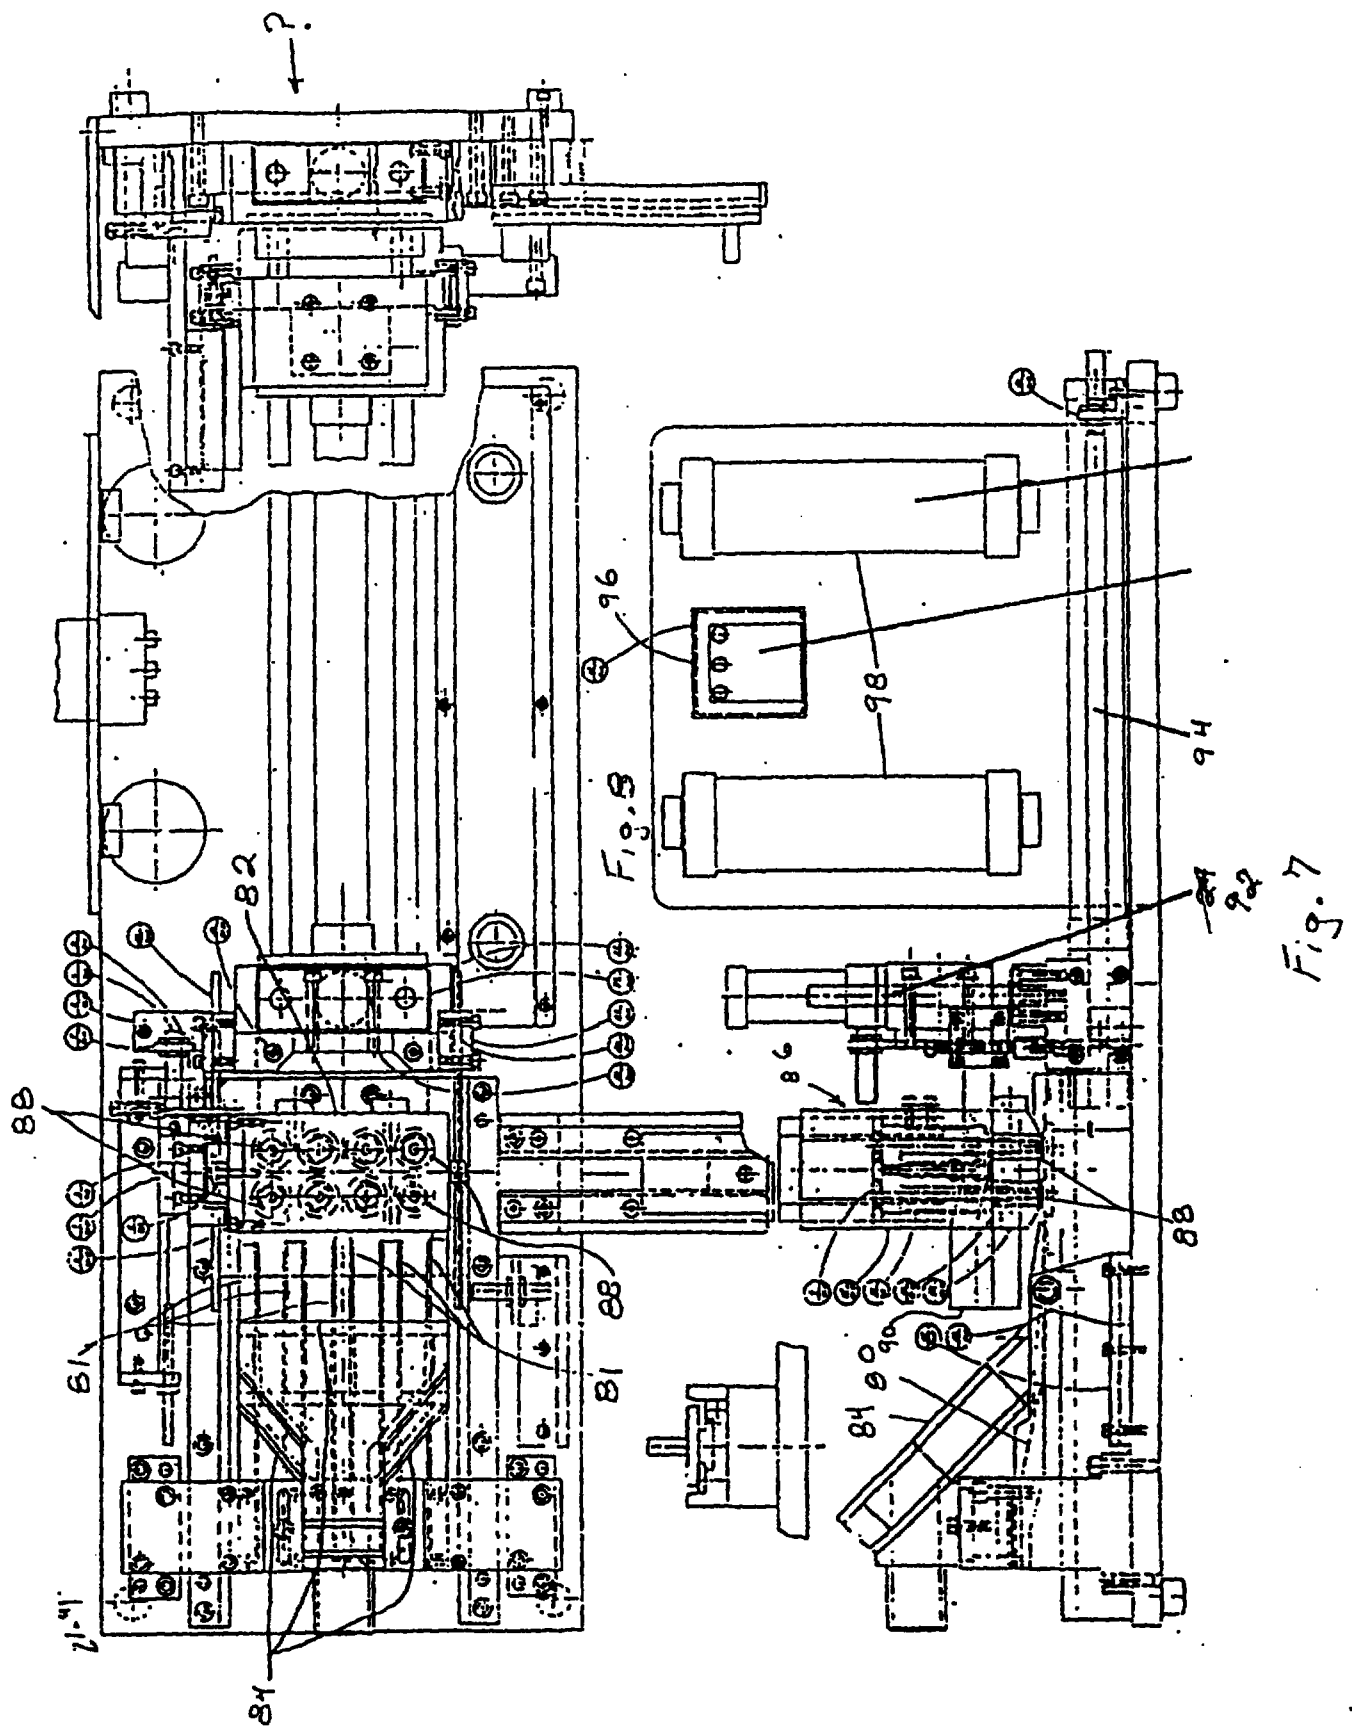

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

CONDUCTIVE PROBE FOR HEATING CONTACT LENS MOLD
ASSEMBLIES DURING DEMOLDING

1

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates generally to a demolding arrangement for demolding cast lens mold assemblies wherein a molded assembly, comprising a frontcurve, a spaced backcurve, and a molded lens formed therebetween, are separated or demolded in a manner which improves the simplicity and efficiency of
10 the demolding operation.

More particularly, the subject invention pertains generally to an arrangement for producing ophthalmic contact lenses in cast contact lens mold assemblies, and providing for the improved removal of
15 molded ophthalmic contact lenses from the molds in which they are cast. The present invention is particularly well suited to molded ophthalmic lenses such as hydrogel contact lenses, although it also has applicability to other small, high-precision
20 ophthalmic lenses such as intraocular lenses.

Prior to the demolding operation in the casting of soft contact lenses, typically one of the lens mold surfaces is heated so as to cause the mold to release easily from the lens. The present
25 invention describes a conductive method of heating the noncritical side of a backcurve mold. The method entails the use of a convex contoured heated probe, either rigid or compliant, which contacts the noncritical side of a backcurve mold having a
30 similarly contoured concave shape. The present invention introduces a well defined heat pattern with

0 5 AUG 1997

1 a favorable temperature gradient which represents an
advantage over other known prior art heated demolding
approaches.

2. Discussion of the Prior Art

5 As the ophthalmic lens industry has grown,
and in particular the industry related to supplying
contact lenses which are provided for periodic
frequent replacement, the number of contact lenses
required to be produced has increased dramatically.
This has spurred manufacturers to strive for automated
methods and apparatus which are adaptable to automated
practices and consistent performance.

10 It is generally known in the prior art to
make ophthalmic lenses, such as soft hydrogel contact
lenses, by molding a monomer or monomer mixture in a
mold such as one made from polystyrene or
polypropylene.

15 Examples of this prior art can be found in
U.S. Patents 5,039,459, 4,889,664 and 4,565,348.
These patents discuss therein the requirement for a
polystyrene mold in which the materials, chemistry and
processes are controlled such that the mold portions
do not require undue force to separate by sticking to
the lens or to each other. In contrast to the above
polystyrene molds, another example is the use of
polypropylene or polyethylene molds as described in
U.S. Patent 4,121,896.

20 The mold assembly to mold an ophthalmic
contact lens typically includes a lower concave mold
portion referred to as a frontcurve and an upper
convex mold portion referred to as a backcurve. The
concave surface of the lower frontcurve and the convex
surface of the upper backcurve define therebetween a

1 mold cavity for a contact lens. A particular problem
in the prior art is that the frontcurve and backcurve
molds are usually surrounded by a flange, and the
monomer or monomer mixture is supplied in excess to
the concave frontcurve mold prior to the assembly of
the molds. As the molds are placed together, defining
5 the lens and forming an edge, the excess monomer or
monomer mixture is expelled from the mold cavity and
rests on or between the flange of one or both mold
portions. Upon polymerization, this excess material
forms an annular ring around the mold assembly which
10 resists separation of the mold portions during a
demolding operation.

In such contact lens manufacturing
processes, lens defects such as chips and tears as
well as missing lenses are believed to result, in
15 part, from the demolding operation. Much development
has been taken place on different mechanical
approaches for separating the mold halves. However,
the mechanical technique is only part of the process.
The method of heating the backcurve mold prior to
20 separation of the mold halves is also very critical.
In an ideal case, one wants to have concentrated heat
at the backcurve mold/lens interface and reduced heat
at the backcurve mold flange/polymer ring interface
and reduced heat at the frontcurve mold/lens
25 interface. Because the polymer (lens material)
releases easier from the polystyrene mold when heated,
an ideal system has the excess polymer ring attached
to the removed backcurve mold and the undisturbed lens
attached to the frontcurve mold.

30 One known prior art process for separating
the mold portions applies heat to the backcurve mold

05 AUG 1997

by a heated air stream. The heated air stream is directed against the exterior of the backcurve mold, from which heat is conducted to the upper surface of the lens. Heat is transferred by thermal conduction through the backcurve mold, the molded lens, and the frontcurve mold. The heating of the backcurve mold can be performed in two sequential steps, a preheat stage and a heat/pry stage. In the heat/pry stage the mold is clamped in place, and pry fingers are inserted under the flange of the backcurve mold. A force is then applied to the backcurve mold by the pry fingers during a heating cycle. When the required temperature has been reached, the backcurve mold breaks free and one end thereof is lifted by the pry fingers. After the backcurve mold portion has been detached from the frontcurve mold portion on at least one side, the mold exits the heater. The backcurve mold and annular flashing are then totally removed. Several notable disadvantages of this approach are a slow heat up time, a poorly defined application zone, and an inconsistent, inaccurate cavity-to-cavity energy transfer rate.

While the aforementioned method has some efficacy in assisting in the removal of a lens from between opposed mold portions, the temperature gradient achieved from the heated backcurve mold across the lens to the frontcurve mold is relatively small. This prior art method has not been entirely satisfactory because the induced thermal gradient is not sufficient to fully and repeatedly separate the mold portions.

Accordingly, a second prior art method has also been developed wherein the backcurve mold portion

0 5 AUG 1997

is irradiated with electromagnetic radiation emanating from a laser, which is absorbed thereby to cause a substantial temperature gradient between the backcurve mold portion and the contact lens being demolded. The temperature gradient causes a differential expansion and shifting of the surface of the heated backcurve mold portion relative to the surface of the lens to lessen the adhesion therebetween to assist in the separation of the mold portions, while leaving the lens in the frontcurve mold portion. The backcurve mold portion is preferably irradiated by a laser producing radiation with a wavelength between 1 μm and 20 μm . The separating fingers are joined together to form a U-shaped separator, and the laser beam is directed through the U opening in the U-shaped separator to irradiate the backcurve mold portion. The one notable disadvantage of this approach is the cost of the laser units.

Steam heated demolding was also previously used in a production process. Notable disadvantages of this approach were issues surrounding the handling of condensate on the backcurve mold and in the equipment, a long equipment heat up time, and complexity.

SUMMARY OF THE INVENTION

Accordingly, it is a primary object of the present invention to provide an improved demolding arrangement for cast lens mold assemblies which can easily and repeatedly separate the lens mold portions without damaging the lens formed therebetween.

A further object of the subject invention is the provision of an arrangement for separating a backcurve mold from a frontcurve mold of a contact

lens mold assembly which improves the simplicity and efficiency of the demolding operation. In a preferred embodiment, a substantial temperature gradient is created between the backcurve mold and the contact lens formed in the cavity of the contact lens mold assembly.

Another object of the present invention is to provide an automated apparatus and method for demolding contact lens mold assemblies in a consistent and reliable manner, to thereby enhance the production of defect-free contact lenses, and minimize tearing of the lens and breakage of the lens mold parts.

The present invention presents a simple, easy to clean, low-cost, very repeatable, and unique conductive probe heating approach for assisting in separating or demolding cast contact lens mold assemblies. The conductive heating arrangement for contact lens demolding represents a distinctly unique approach relative to other prior art approaches used for similar purposes. Hot air and steam heating represent a convective heat transfer principle. Laser and infrared heating represent a radiation heat transfer principle. Thus, a concept representing a conductive heat transfer principle is unique.

In accordance with the teachings herein, the present invention provides apparatus for demolding a mold assembly, which includes a frontcurve mold having a central mold section with a surrounding flange, and a corresponding backcurve mold also having a central mold section with a surrounding flange, with a contact lens being molded therebetween. The flanges of the frontcurve and backcurve molds are spaced apart and parallel to each other. The demolding apparatus

05 AUG 1997

includes a conductive heating probe which contacts the backcurve mold of the lens mold assembly to

1 conductively heat the backcurve mold. Heat is
conducted by the backcurve mold to cause a temperature
gradient between the backcurve mold and the lens being
demolded. The temperature gradient causes a
5 differential expansion and shifting of the surface of
the backcurve mold relative to the surface of the lens
to lessen the adhesion therebetween to assist in
separation of the molds, while leaving the lens in the
frontcurve mold.

10 In greater detail, The conductive heating
probe includes a convex heating surface which contacts
and is the same general shape as a concave surface on
the backcurve mold. The conductive heating probe can
also include a compliant heat conductor to conform to
15 the concave surface on the backcurve mold. The
compliant heat conductor can comprise a thin element
positioned on the end of the conductive heating probe.
The conductive heating probe can be spring mounted in
a support plate to spring bias the conductive heating
20 probe against the backcurve mold. Moreover, a spring
preload adjustor can be provided for adjusting the
preload bias on the spring of the conductive heating
probe. Alternatively, the free weight of the
conductive heating probe can provide the force to bias
25 the conductive heating probe against the backcurve
mold. The conductive heating probe can also include a
cartridge electrical heating element and a
thermocouple for detecting and controlling the
temperature of the conductive heating probe.

30 The demolding apparatus can include a
support pallet for supporting the mold assembly and a

05 AUG 1997

1 separating fixture for providing a separation force
between the spaced flanges of the frontcurve and
backcurve molds of the mold assembly.

5 The support pallet preferably supports a
plurality of mold assemblies arranged in an $n \times m$
array of mold assemblies. In those embodiments, the
apparatus can include a conductive heating probe
assembly having an $n \times m$ array of conductive heating
probes which contact each backcurve mold of the $n \times m$
array of mold assemblies, for conductively contacting
and heating the array of mold assemblies. A lift
10 cylinder raises and lowers the conductive heating
probe assembly relative to the support pallet. During
operation, the weights of the individual conductive
heating probes are maintained on the array of mold
assemblies during demolding to maintain the array of
15 mold assemblies properly positioned in the support
pallet during demolding. A lifting cam is provided to
lift the conductive probe assembly from the pallet
following demolding as an indexer conveys the pallet
past the assembly lifting cam.

20 BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing objects and advantages of the
present invention for a wedge demolding apparatus and
method may be more readily understood by one skilled
in the art with reference being had to the following
25 detailed description of several preferred embodiments
thereof, taken in conjunction with the accompanying
drawings wherein like elements are designated by
identical reference numerals throughout the several
views, and in which:

30 Figure 3 is a diagrammatic
representation of a wedge type demolding arrangement

05 AUG 1997

which utilizes a double-sided removal of a backcurve mold;

1 Figure 4 illustrates a first embodiment of a conductive heat probe for conductive contact heating of the backcurve of a lens mold assembly during demolding;

5 Figure 5 illustrates an embodiment of a free-weighted conductive heat probe assembly pursuant to the teachings of the subject invention;

10 Figure 6 illustrates a front elevational view of another embodiment of a conductively heated demolding apparatus; and

 Figures 7 and 8 are respectively front elevational and top plan views of the same embodiment of Figure 6 presented in an overall assembly view of the apparatus.

15 DETAILED DESCRIPTION OF THE DRAWINGS

 Referring to the drawings in detail, and in particular initially to Figures 1 and 2, Figure 1 illustrates a front elevational view of a support pallet 10 which supports thereon an array, typically a two by four array, of contact lens mold assemblies 12, one of which is illustrated in further detail in Figure 2.

25 Figure 2 is an enlarged side elevational and sectional view of one contact lens mold assembly 12 which consists of a lower frontcurve mold 14 and an upper backcurve mold 16, which define therebetween a mold cavity for a contact lens 18.

30 The frontcurve and backcurve mold halves 14 and 16 are preferably formed of polystyrene but could be any suitable thermoplastic polymer which is sufficiently transparent to ultraviolet light to allow

0 5 AUG 1997

10

irradiation therethrough with light to promote the subsequent polymerization of a soft contact lens. A
1 suitable thermoplastic such as polystyrene also has other desirable qualities such as being moldable to surfaces of optical quality at relatively low
temperatures, having excellent flow characteristics
5 and remaining amorphous during molding, not crystallizing, and have minimal shrinkage during cooling.

The frontcurve mold half 14 defines a central curved section with an optical quality concave
10 surface 20, which has a circular circumferential knife edge 22 extending therearound. The knife edge 22 is desirable to form a sharp and uniform plastic radius parting line (edge) for the subsequently molded soft contact lens 18. A generally parallel convex surface
15 24 is spaced from the concave surface 20, and an annular essentially uniplanar flange 26 is formed extending radially outwardly from the surfaces 20 and 24. The concave surface 20 has the dimensions of the frontcurve (power curve) of a contact lens to be
20 produced by the mold assembly, and is sufficiently smooth such that the surface of a contact lens formed by polymerization of a polymerizable composition in contact with the surface is of optically acceptable quality. The frontcurve mold half is designed with a
25 thinness, typically 0.8 mm, and rigidity effective to transmit heat therethrough rapidly and to withstand prying forces applied to separate the mold half from the mold assembly during a demolding operation. The frontcurve mold half 14 further defines a generally
30 triangular tab 28, integral with the flange 26 which projects from one side of the flange. Tab 28 is

35

essentially uniplanar and extends to an injection hot
tip which supplies molten thermoplastic to form the
1 frontcurve mold half.

The backcurve mold half 16 defines a central
curved section with an optical quality convex surface
32, a generally parallel concave surface 34 spaced
5 from the convex surface 32, and an annular essentially
uniplanar flange 36 formed extending radially
outwardly from the surfaces 32 and 34. The convex
surface 32 has the dimensions of the rear curve (which
rests upon the cornea of the eye) of a contact lens to
10 be produced by the backcurve mold half, and is
sufficiently smooth such that the surface of a contact
lens formed by polymerization of a polymerizable
composition in contact with the surface is of
optically acceptable quality. The backcurve mold half
15 is designed with a thinness, typically 0.6 mm, and
rigidity effective to transmit heat therethrough
rapidly and to withstand prying forces applied to
separate the mold half from the mold assembly during
demolding. The backcurve mold half 16 also defines a
20 generally triangular tab 38, similar to the triangular
tab 28, integral with the flange which projects from
one side of the flange. The tab 38 extends to an
injection hot tip which supplies molten thermoplastic
to form the backcurve mold half.

25 During the process of molding a contact
lens, an excess amount of polymer or polymer mixture
is initially deposited in a frontcurve mold, and then
a backcurve mold is placed over the frontcurve mold
and pressed thereagainst. This results in excessive
30 polymer in the mold cavity being displaced and

0 5 AUG 1997

12

discharged therefrom and forming an excess polymer ring 42 outside of the knife edge 22.

1 The flanges 26 and 36 are designed to assist
in demolding and part handling, and also protect the
optical surfaces and the knife edge. The geometry of
the triangular tabs 28 and 38 serves an additional
5 function in straightening and orienting the assembled
frontcurve/backcurve assembly 12 prior to demolding.
When a frontcurve mold half or curve 14 is assembled
with a backcurve mold half or curve 16, a gap 40 is
formed between the two spaced flanges and projecting
10 tabs which is important for demolding. The gap
between the tabs is preferably in the range of 1.0 mm-
3.0 mm, and is required to assist in the demolding
operation, as explained in greater detail hereinbelow.

Referring to Figures 1 and 2, the contact
15 lens mold assemblies 12 are supported in the pallet 10
with the annular flanges 26 and tabs 28 of the
frontcurve mold 14 recessed slightly below the upper
surface of the pallet 10. The annular flanges 36 and
tabs 38 of the backcurve mold 16 are raised above the
20 upper surface of the pallet, to allow a mechanical
separating member to be inserted between the spaced
flanges 26, 36 of the frontcurve and backcurve.

Figure 3 is a diagrammatic representation of
a wedge type demolding apparatus which utilizes a
25 double-sided removal of the backcurve mold. The
demolding apparatus illustrated in Figure 3 includes a
schematically illustrated mold pallet 10, a frontcurve
mold 14, a backcurve mold 16, and a demolding cam
wedge 44.

30 The demolding apparatus and process of
Figure 3 operates as follows.

05 AUG 1997

13

STEP 1: The mold assembly 12, which includes the backcurve mold 16, the frontcurve mold 14, the lens 18 and the excess polymer ring 42, is heated (preferably from the top) at or immediately prior to step 1. The heating process can occur exclusively at step 1, or it may continue throughout the entire demolding operation. At the point illustrated in step 1, the wedge 44 does not stress the backcurve mold 16 and frontcurve mold 14, but is fully engaged in between the flanges 26 and 36 of the backcurve and frontcurve molds. Note that the wedge 44 does not interfere with the excess polymer ring 42 as such interference would cause a fouling condition which would render the process ineffective.

STEP 2: As shown in the top view, the pallet 10 and mold assembly 12 are moved by a product indexer or drive 46 to proceed along the wedges 44. The slope or cam angle of the wedge and/or the feed rate determine the rate of backcurve removal. A nonlinear wedge slope or cam angle and/or feed rate results in a nonlinear backcurve removal rate. The heating process also affects the acceptable removal rate. The amount of excess polymer 42 also influences the process conditions.

STEP 3: At this point, the mold assembly has been moved by the product indexer 46 to a point on the wedges 44 such that the backcurve mold 16 with the excess polymer ring 42 is completely separated from the frontcurve mold 14 and lens 18.

The required amount of separation or wedge height for effective demolding is dependent primarily upon the size of the excess polymer ring and the efficiency of the heating operation. A typical

05 AUG 1997

embodiment would allow for more wedge height than is theoretically necessary to ensure complete mold removal. At this point or directly thereafter, the now separated backcurve mold 16 and polymer ring 42 are removed by an overhead vacuum take-away system 47 which deposits the backcurves in a waste container for recycling.

Figure 4 illustrates the basic components of a first embodiment of a conductive backcurve lens mold heater, and illustrates a contact lens mold assembly 12 seated in a typical support pallet 10. A spring loaded heat probe 50 with a compliant heat conductor 52 on the contoured end thereof contacts the mold assembly from above. Figure 4 shows the assembly in the heating mode. However, it should be apparent that when the lens mold assembly 12 and pallet 10 are moved downwardly, the probe 50 will extend downwardly under the bias of spring 54 until it hits internal stops at 56.

Figure 4 illustrates a cured contact lens 18 in a contact lens mold assembly 12 comprised of a frontcurve mold 14 and a backcurve mold 16, and an excess polymer ring 42. The heat probe 50 includes the compliant heat conductor 52, a thermocouple 58, and a cartridge heater 60. The assembly includes a spring pre-load adjustor 62 for spring 54, and is mounted in a top guide plate 64 and bottom guide fixture 66. The pre-load adjustor 62 is threadedly engaged to the probe 50 such that its position thereon, and the amount of pre-load supplied by the spring 54, is adjustable. The compliant heat conductor 52 includes a lower convex curved face having the same general shape as the internal concave

0 5 AUG 1997

15

surface forming the back of the backcurve mold 16. The compliant heat conductor includes an annular inwardly extending projection 68 which fits into a corresponding recessed annular groove 70 near the lower end of the probe 50 to lock those elements together. Alternative embodiments of the heat probe 50 can omit the compliant heat conductor 52, in which case of the relatively rigid end of the heat probe 50 would be shaped to the same general shape as the internal concave surface on the back of the backcurve mold 16.

10 Functional steps

Step 1 The backcurve mold 14 and compliant conductor 52 begin the process not in contact. The cartridge heater 60 is heated by use of an appropriate electric control device and the thermocouple 58.

15 Step 2 As the lens mold assembly pallet 10 is raised, the compliant conductor 52 comes into contact with the backcurve mold 14.

Step 3 The lens mold assembly pallet 10 continues rising until the heat probe 50 has moved a sufficient distance such that spring 54 has supplied a desired contact force between the compliant conductor 52 and the backcurve mold 14.

Step 4 The assembly dwells in that position until such time as sufficient heat has conducted through the heat probe 50, the compliant conductor 52, and the backcurve mold 14 to raise the interface temperature between the backcurve mold and the cured contact lens to the desired level. The desired temperature is sufficiently high to allow easy release of the backcurve mold from the cured contact lens

35

without causing the cured contact lens to release from the frontcurve mold.

1 Step 5 The lens mold pallet 10 is then
lowered until contact between the compliant conductor
52 and the backcurve mold 14 is broken and there is
sufficient clearance to translate the lens mold
5 assembly pallet 10 with the mold assembly to a demold
station. An optional function is to begin the
demolding operation while the assembly is still in
step 4 above.

Key process related features and options

10 Heating In the embodiment described above
the source heat is an electric cartridge heater. In
alternate embodiments, the heat source could be steam,
hot water, RF, etc. Placement of the thermocouple may
be different from that in the illustrated embodiment,
15 and it does not have to be integral with the heater
cartridge. The method of controlling the heating is
important. It is believed that optimal demold
conditions exist in fairly narrow time/temperature
profiles. Therefore, for process consistency, a true
20 proportional fractional wave control may be
appropriate for the cartridge heater. For consistent
heat flow, potting of the heater cartridge may also be
appropriate. To minimize the temperature loss in the
heat probe between cycles, the thermal mass ($C_p \times$
25 Mass) of the heat probe should be maximized. Also,
the heat probe material should have a moderate to high
thermal conductivity.

A preferred embodiment of the compliant
conductor 52 comprises a high temperature molded
30 silicone piece with a contour on the external
contacting surface which closely matches the contour

of the noncritical core side of the backcurve mold. Other embodiments can include materials other than
1 silicone. The criteria for this component is that it have a sufficiently high thermal conductivity and sufficiently high resistance to thermal degradation to transfer heat to the lens mold assembly effectively
5 while maintaining compliance and dimensional stability. The degree to which the dimensional stability and compliance are required is dependent upon the amount of contact force used. The higher the contact force, the more important the contour of the
10 machined surface on the heat probe 50 becomes and the less important the contour of the compliant conductor becomes. To this end, an alternate embodiment can utilize a rigid conductor in which the lower end of the heat probe 50 is machined to directly match the
15 core side contour of the backcurve mold. If sufficient contact force is utilized, sufficient compliance exists in the backcurve mold itself to assure a low thermal resistance contact. Thus, a compliant conductor is not necessary in this
20 embodiment.

The diameter of the contacting end of the heat probe 50, either compliant or rigid, is an important design variable in that the heat should ideally be directed to the lens 18 and not to the
25 excess polymer ring 42. If the polymer ring receives too much heat it will tend to release from the backcurve mold during the demolding process which is undesirable. If the lens edge receives too much heat, it will tend to separate from the frontcurve during
30 demolding and cause edge defects and/or missing lenses. Optimization of the diameter along with other

05 AUG 1997

process variables can maximize polymer ring removal rates while minimizing edge related defects in lenses and missing lenses.

Accordingly, the diameter of the contacting end of the heat probe 50 might be selected to be less than the diameter of a lens being demolded in some embodiments, and in other embodiments the diameter of the contacting end of the heat probe 50 might be greater than the diameter of a lens being demolded. Moreover, the geometry of the contacting end of the heat probe 50 might be selected to achieve particular heat transfer patterns. For instance, the end of the heat probe 50 might be annular shaped, such that heat is selectively transferred from the annular end to an annular area of the backcurve mold around the edge of the lens. Moreover, the heat probe might have a complex construction of several different materials, each having a selected thermal mass and thermal conductivity, to achieve different heating patterns and profiles across the backcurve mold and lens. For instance, the heat probe might be constructed with concentric rings of different materials of different thermal masses and thermal conductivities to achieve a desired complex heating pattern of the backcurve mold and lens.

Figure 5 illustrates an embodiment of a rigid conductor, free-weighted contact lens mold heater assembly 51 without springs 54. The heat probe 50 illustrated in Figure 4 is normally mounted in an assembly which includes an array of such heat probes mounted and positioned to correspond to an array of contact lens mold assemblies positioned in a support pallet, with such a heat probe assembly being

05 AUG 1997

illustrated in alternative embodiments in Figures 5 and 6-8. In the embodiment of Figure 5, the heat probes 50 are mounted free-weighted with a degree of lateral movement because the unit is designed to work with 8-cavity frame molds which preferably have large center-to-center tolerances.

Figure 6 illustrates a front elevational view of a conductively heated embodiment of a one sided wedge type demolding apparatus designed to utilize molds with reduced excess polymer rings 42. Figures 7 and 8 are respectively front elevational and top plan views of the same embodiment of Figure 6 presented in an overall assembly view of the apparatus.

The demolding arrangement illustrated in Figures 6, 7 and 8 includes a wedge assembly or fixture 80, comprised of a plurality of separating wedges 81, a moving support pallet 82, a vacuum take-away hood 84, a heat conductive probe assembly 86 having a 2 x 4 array of heat conductive probes 88, a heat conductive probe lifting cam 90, a conductive probe assembly lift cylinder 92, a pallet drive hydraulic cylinder 94, a process controller/timer 96, and hydraulic fluid reservoirs 98.

In operation, the heat conductive probe assembly 86 is lifted vertically by the lift cylinder 92 via the lifting cam 90 such that a mold frame assembly 64 can be placed into the support pallet 82 without interfering with the conductive probes 88. The conductive probe assembly 86 is then lowered by the lift cylinder 92 via the lifting cam 90 so that the conductive probes 88 are resting under their own

05 AUG 1997

20

weight on the lens portions of the noncritical side of the backcurve molds 16.

1 At this point, heat is conducted through the
conductive probes 88 into the lens mold assemblies.
In operation, the conductive probes 88 have cartridge
5 heaters which are maintained at a specific
temperature. After a period of time programmed into
the process controller/timer 96 has elapsed, the
pallet 82 is moved in a right to left direction by the
hydraulic cylinder 94 which is fed from the reservoirs
98. The conductive probe assembly 86 is moved
10 simultaneously with the pallet 82 such that the weight
of the conductive probe assembly 86 remains fully on
the backcurve molds 16. After a given travel
distance, the backcurve mold excess polymer rings
begin separating by the cam or wedge profiling
15 associated with the wedge assembly 80. At a point
before full backcurve mold separation, the cam profile
on the conducting probe assembly lifting cam 90 lifts
the conductive probe assembly 86 and conductive probes
88 clear of the mold assemblies. As the pallet 82
20 continues leftward, the backcurves 16 separate
completely from the frontcurve frame 64 and are
vacuumed away by the vacuum take-away hood 84. The
pallet 82 then reaches its leftmost point and the
frontcurve mold frame 64 with lenses 18 is removed.
25 The unit is then reset and is ready for the next cycle
of operation.

One purpose of maintaining the conductive
probes 88 in contact with the backcurve molds 16
while the molds 16 are engaging the wedge assembly 80
30 is to provide and maintain a normal force on each
backcurve mold 16 to counteract a shear force

35

generated by the profiling angle on the wedge and
acting on the partially released lens. The hydraulic
1 drive cylinder 94 functions and is used to maintain a
constant maximum force on the pallet in the direction
of travel thereof. This constant maximum force allows
the pallet 82 to slow down or speed up depending upon
5 how much resistance is encountered during the
separation of the backcurve. This feature helps to
compensate for process variations due to temperature
variations, excess polymer ring sizes, etc.

While several embodiments and variations of
10 the present invention for conductive probes for
heating contact lens mold assemblies during demolding
are described in detail herein, it should be apparent
that the disclosure and teachings of the present
invention will suggest many alternative designs to
15 those skilled in the art.

20

25

30

35

0 5 AUG 1997

22

WHAT IS CLAIMED IS:

1 1. Apparatus for demolding a lens mold
assembly, comprising a frontcurve mold which has a
central lens mold section with a surrounding flange,
and a corresponding backcurve mold which has a
5 central lens mold section with a surrounding flange,
and a molded ophthalmic lens which is formed between
the frontcurve and backcurve molds, and wherein the
flanges of the frontcurve and backcurve molds are
spaced apart relative to each other, comprising a
10 conductive heating probe which contacts the backcurve
mold of the lens mold assembly to conductively heat
the backcurve mold, in which heat is conducted by the
backcurve mold to cause a temperature gradient between
the backcurve mold and the lens being demolded, with
15 the temperature gradient causing a differential
expansion and shifting of the surface of the backcurve
mold relative to the surface of the lens to lessen the
adhesion therebetween to assist in separation of the
molds, while leaving the lens in the frontcurve mold.

20 2. Apparatus for demolding a mold assembly
as claimed in claim 1, wherein the conductive heating
probe includes a convex heating surface which contacts
and is the same general shape as a concave surface on
the backcurve mold.

25 3. Apparatus for demolding a mold assembly
as claimed in claim 2, wherein the conductive heating
probe includes a compliant heat conductor to conform
to the concave surface on the backcurve mold.

30 4. Apparatus for demolding a mold assembly
as claimed in claim 3, wherein the compliant conductor
comprises a thin element positioned on the end of the
conductive heating probe.



1 5. Apparatus for demolding a mold assembly
as claimed in claim 1, wherein the conductive heating
probe is spring mounted in a support plate to spring
bias the conductive heating probe against the
backcurve mold.

5 6. Apparatus for demolding a mold assembly
as claimed in claim 5, including a spring preload
adjustor for adjusting the preload bias on the spring
of the conductive heating probe.

10 7. Apparatus for demolding a mold assembly
as claimed in claim 1, wherein the conductive heating
probe includes a cartridge electrical heating element.

15 8. Apparatus for demolding a mold assembly
as claimed in claim 1, wherein the conductive heating
probe includes a thermocouple for detecting and
controlling the temperature of the conductive heating
probe.

20 9. Apparatus for demolding a mold assembly
as claimed in claim 1, including a support pallet for
supporting the mold assembly and a separating fixture
positioned between the spaced flanges of the
frontcurve and backcurve molds of the mold assembly.

25 10. Apparatus for demolding a mold assembly
as claimed in claim 9, wherein the support pallet
supports a plurality of mold assemblies.

30 11. Apparatus for demolding a mold assembly
as claimed in claim 10, wherein the support pallet
supports an n x m array of mold assemblies.

35 12. Apparatus for demolding a mold assembly
as claimed in claim 11, including a conductive heating
probe assembly, having an n x m array of conductive
heating probes therein, which contact each backcurve



* C L M S *

05 AUG 1997

24

mold of the $n \times m$ array of mold assemblies, for
conductively heating the array of mold assemblies.

1 13. Apparatus for demolding a mold assembly
as claimed in claim 12, including a lift cylinder for
raising and lowering the conductive heating probe
assembly relative to the support pallet, and wherein
5 the weights of the individual conductive heating
probes are maintained on the array of mold assemblies
during demolding to maintain the array of mold
assemblies properly positioned in the support pallet
during demolding.

10 14. Apparatus for demolding a mold assembly
as claimed in claim 13, including a conductive probe
assembly lifting cam which lifts the conductive probe
assembly from the pallet after demolding as an
indexing means conveys the pallet past the conductive
15 probe assembly lifting cam.

20



25

30

35

05 AUG 1997

25

CONDUCTIVE PROBE FOR HEATING CONTACT LENS MOLD
ASSEMBLIES DURING DEMOLDING

ABSTRACT OF THE DISCLOSURE

Demolding apparatus for reliably and
1 repeatedly mechanically separating contact lens mold
assemblies without damaging the contact lens formed
therebetween. The mold assembly includes a frontcurve
mold having a central mold section with a surrounding
5 flange, and a corresponding backcurve mold also
having a central mold section with a surrounding
flange, with a contact lens being molded therebetween.
The demolding apparatus includes a conductive heating
probe which contacts the backcurve mold of the lens
10 mold assembly to conductively heat the backcurve mold.
Heat is conducted by the backcurve mold to cause a
temperature gradient between the backcurve mold and
the lens being demolded. The temperature gradient
causes a differential expansion and shifting of the
15 surface of the backcurve mold relative to the surface
of the lens to lessen the adhesion therebetween to
assist in separation of the molds, while leaving the
lens in the frontcurve mold.
The conductive heating probe includes a convex heating
20 surface which contacts and is the same general shape
as a concave surface on the backcurve mold, and can
also include a compliant heat conductor to conform to
the concave surface on the backcurve mold. In one
embodiment, the apparatus includes a conductive
25 heating probe assembly having an $n \times m$ array of
conductive heating probes which contact each backcurve
mold of an $n \times m$ array of molds assemblies positioned
in a support pallet.

30

Figure 1

This Sheet Has Been Replaced



35

THIS SHEET HAS BEEN

11

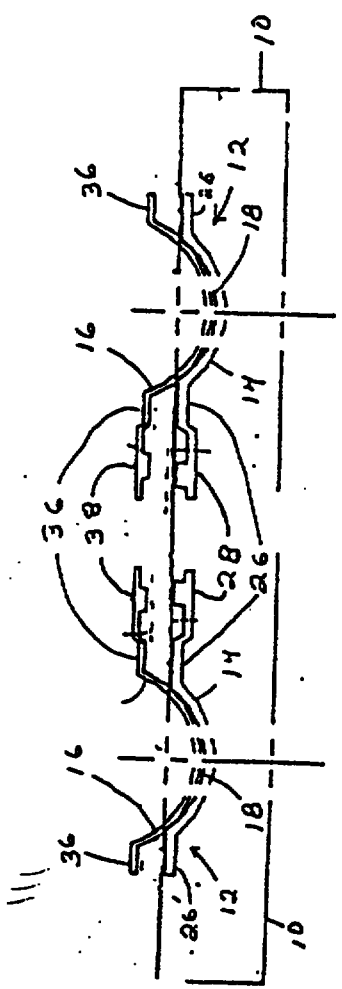


Fig. 1


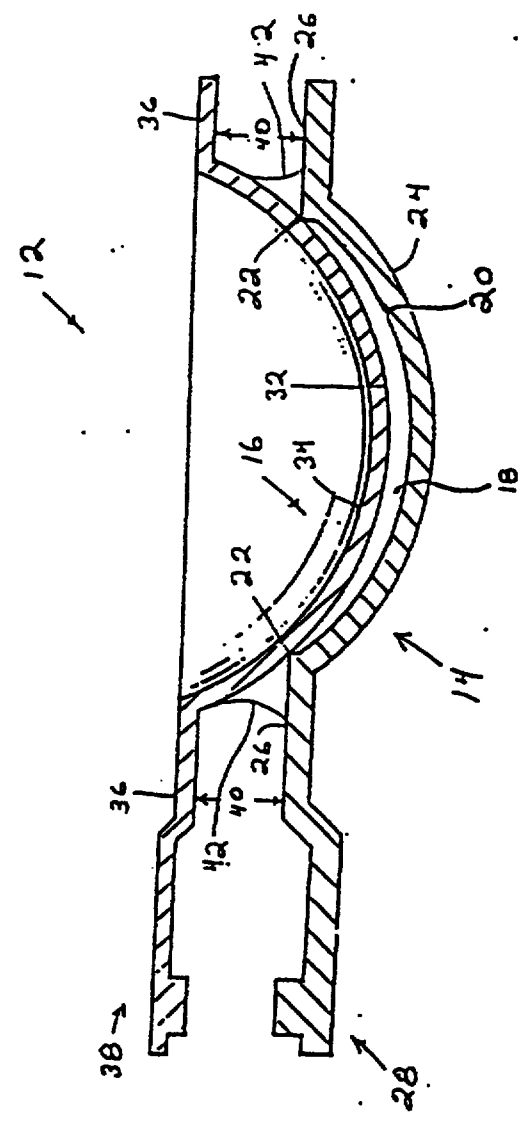


Fig. 2

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

0 5 AUG 1997

2

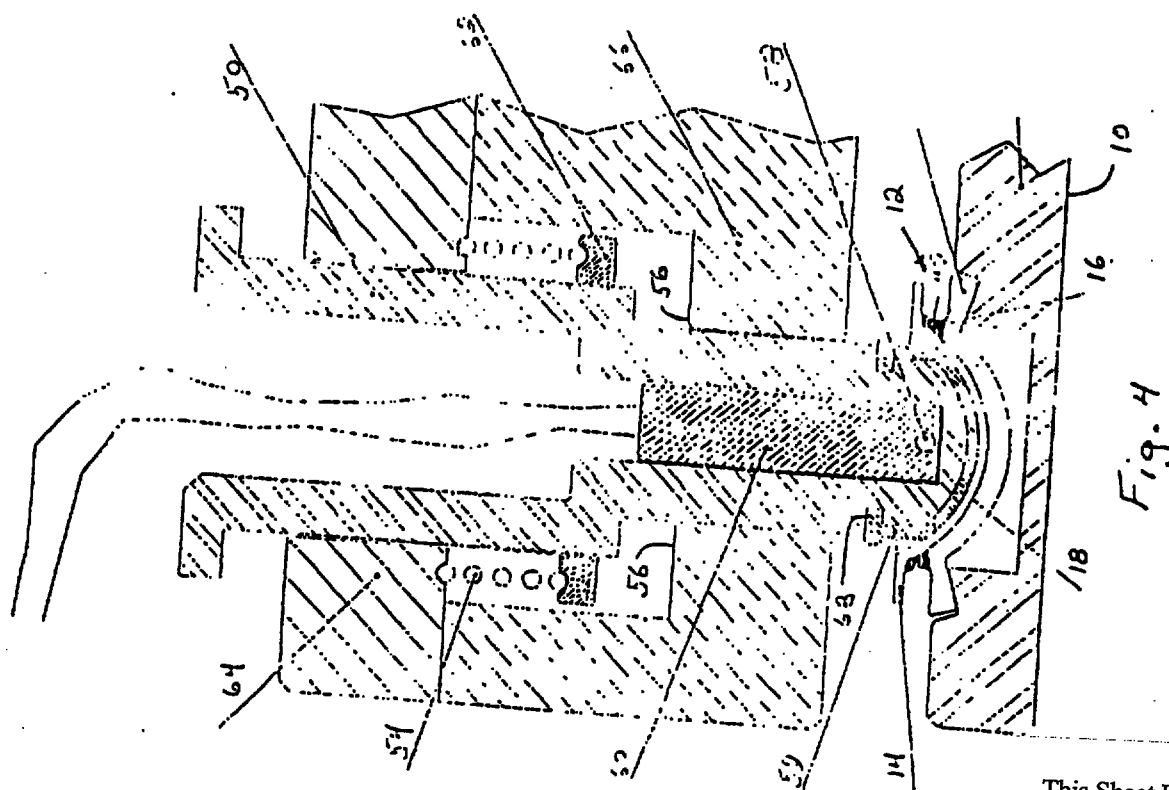


Fig. 4

This Sheet Has Been Replaced


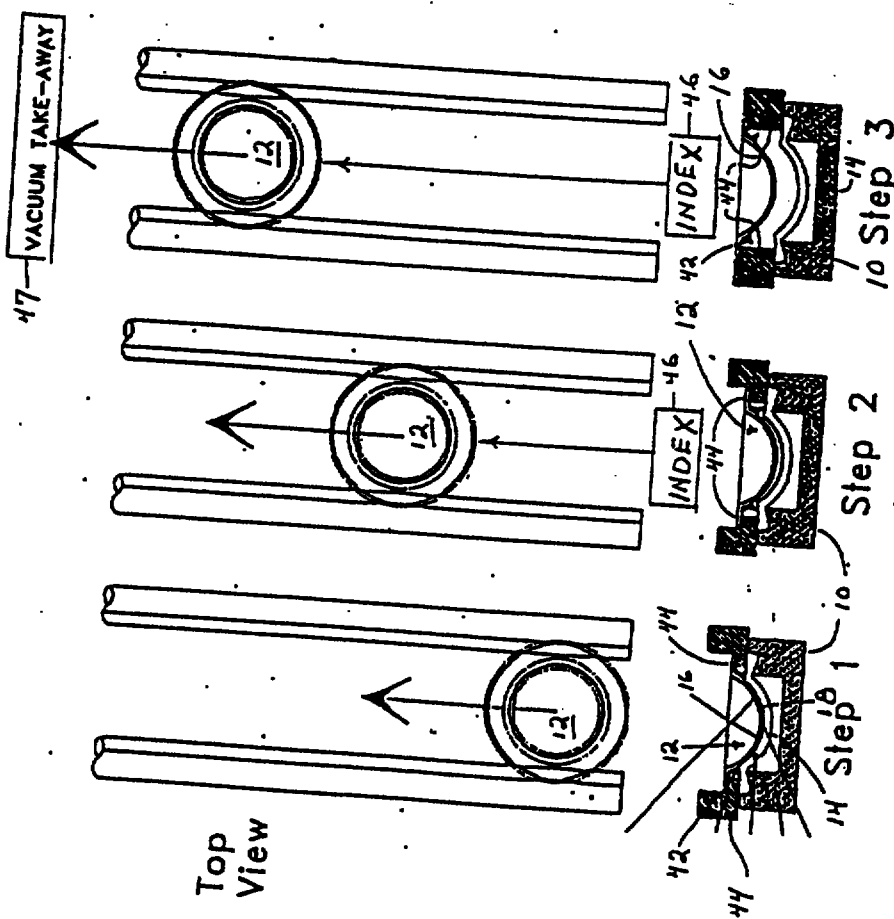


Fig. 3

Top View

THIS SHEET HAS BEEN REPLACED

05 AUG 1997

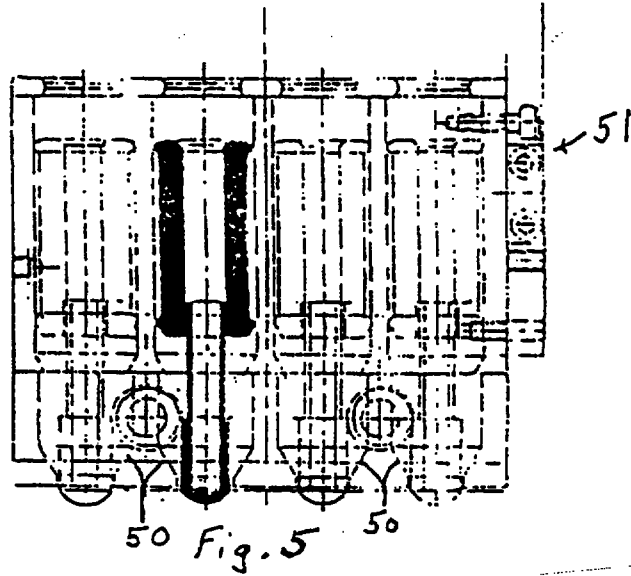

This Sheet Has Been Replaced



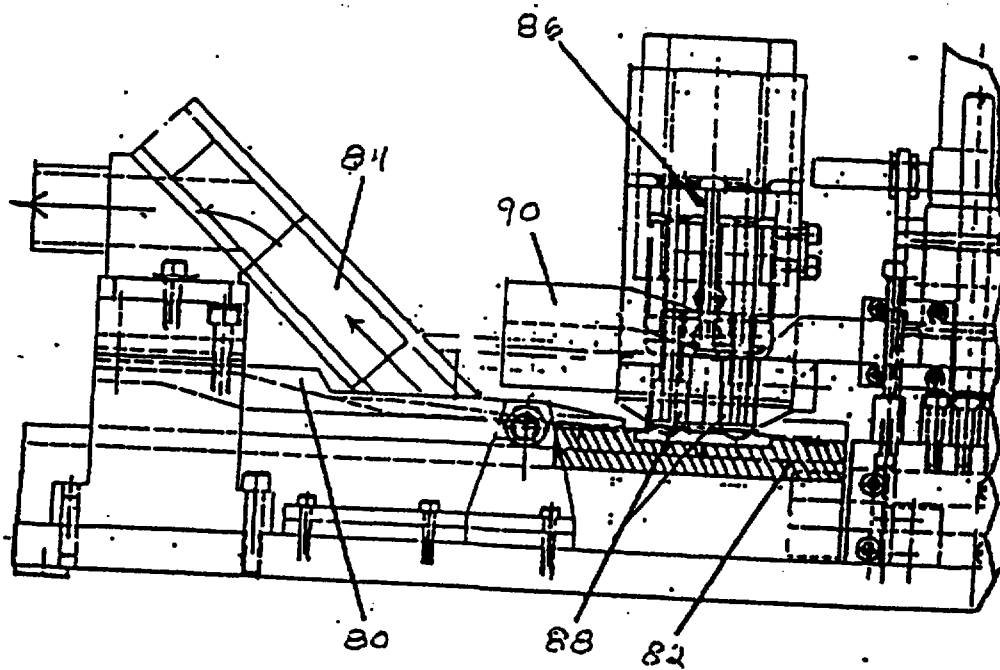


Fig. 6

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced

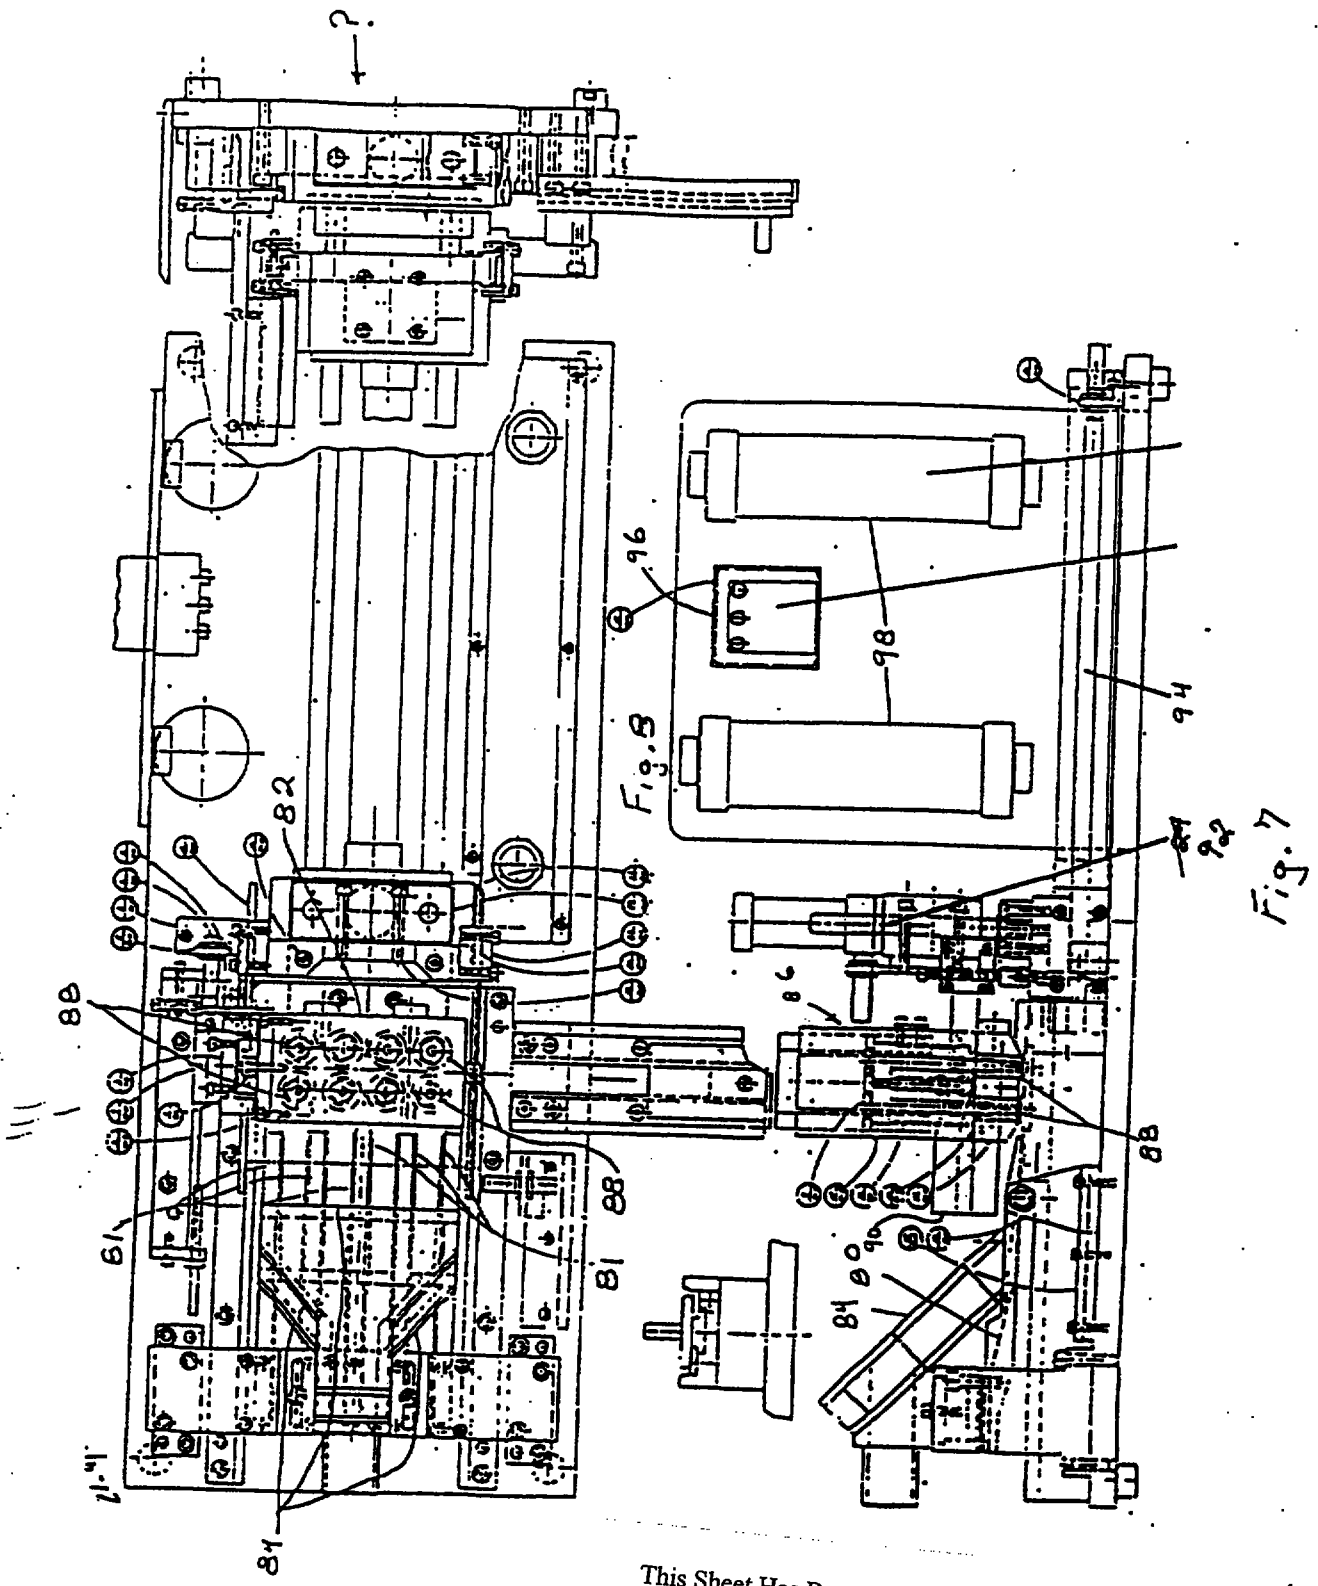

CONDUCTIVE PROBE FOR HEATING CONTACT LENS MOLD
ASSEMBLIES DURING DEMOLDING

ABSTRACT OF THE DISCLOSURE

Demolding apparatus for reliably and
1 repeatedly mechanically separating contact lens mold
assemblies without damaging the contact lens formed
therebetween. The mold assembly includes a frontcurve
mold having a central mold section with a surrounding
5 flange, and a corresponding backcurve mold also
having a central mold section with a surrounding
flange, with a contact lens being molded therebetween.
The demolding apparatus includes a conductive heating
probe which contacts the backcurve mold of the lens
10 mold assembly to conductively heat the backcurve mold.
Heat is conducted by the backcurve mold to cause a
temperature gradient between the backcurve mold and
the lens being demolded. The temperature gradient
causes a differential expansion and shifting of the
15 surface of the backcurve mold relative to the surface
of the lens to lessen the adhesion therebetween to
assist in separation of the molds, while leaving the
lens in the frontcurve mold.
The conductive heating probe includes a convex heating
20 surface which contacts and is the same general shape
as a concave surface on the backcurve mold, and can
also include a compliant heat conductor to conform to
the concave surface on the backcurve mold. In one
embodiment, the apparatus includes a conductive
25 heating probe assembly having an $n \times m$ array of
conductive heating probes which contact each backcurve
mold of an $n \times m$ array of molds assemblies positioned
in a support pallet.

30 Figure 2

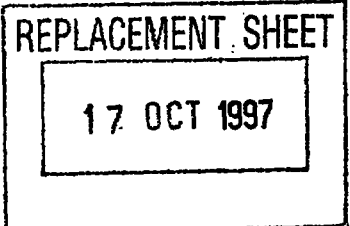


FIG. 1

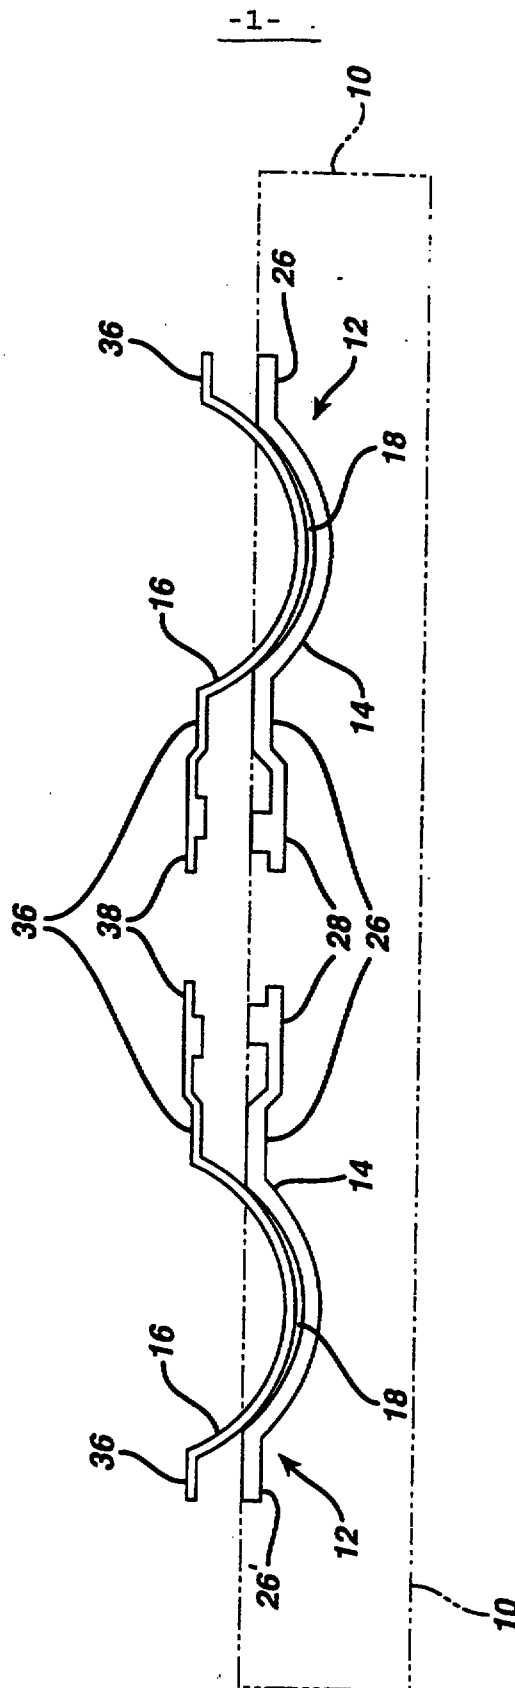


FIG. 2

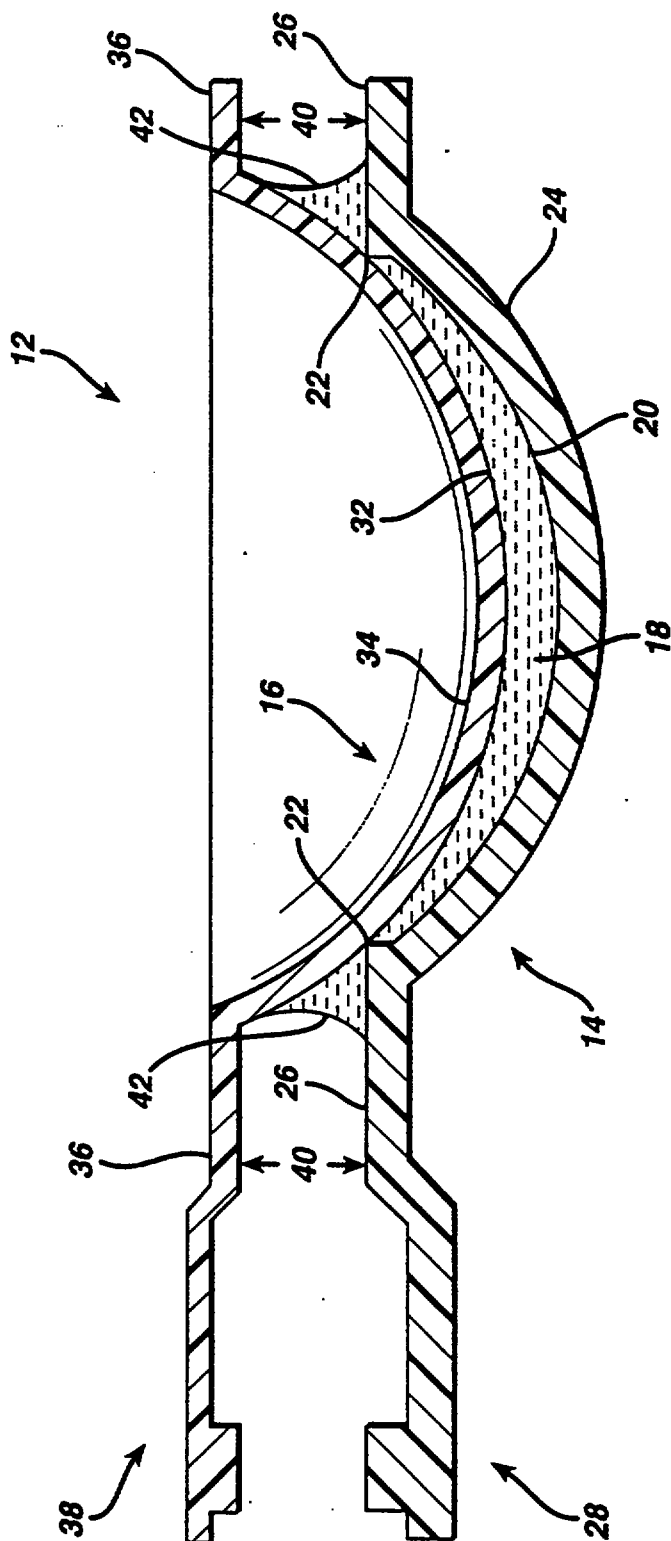


FIG. 3

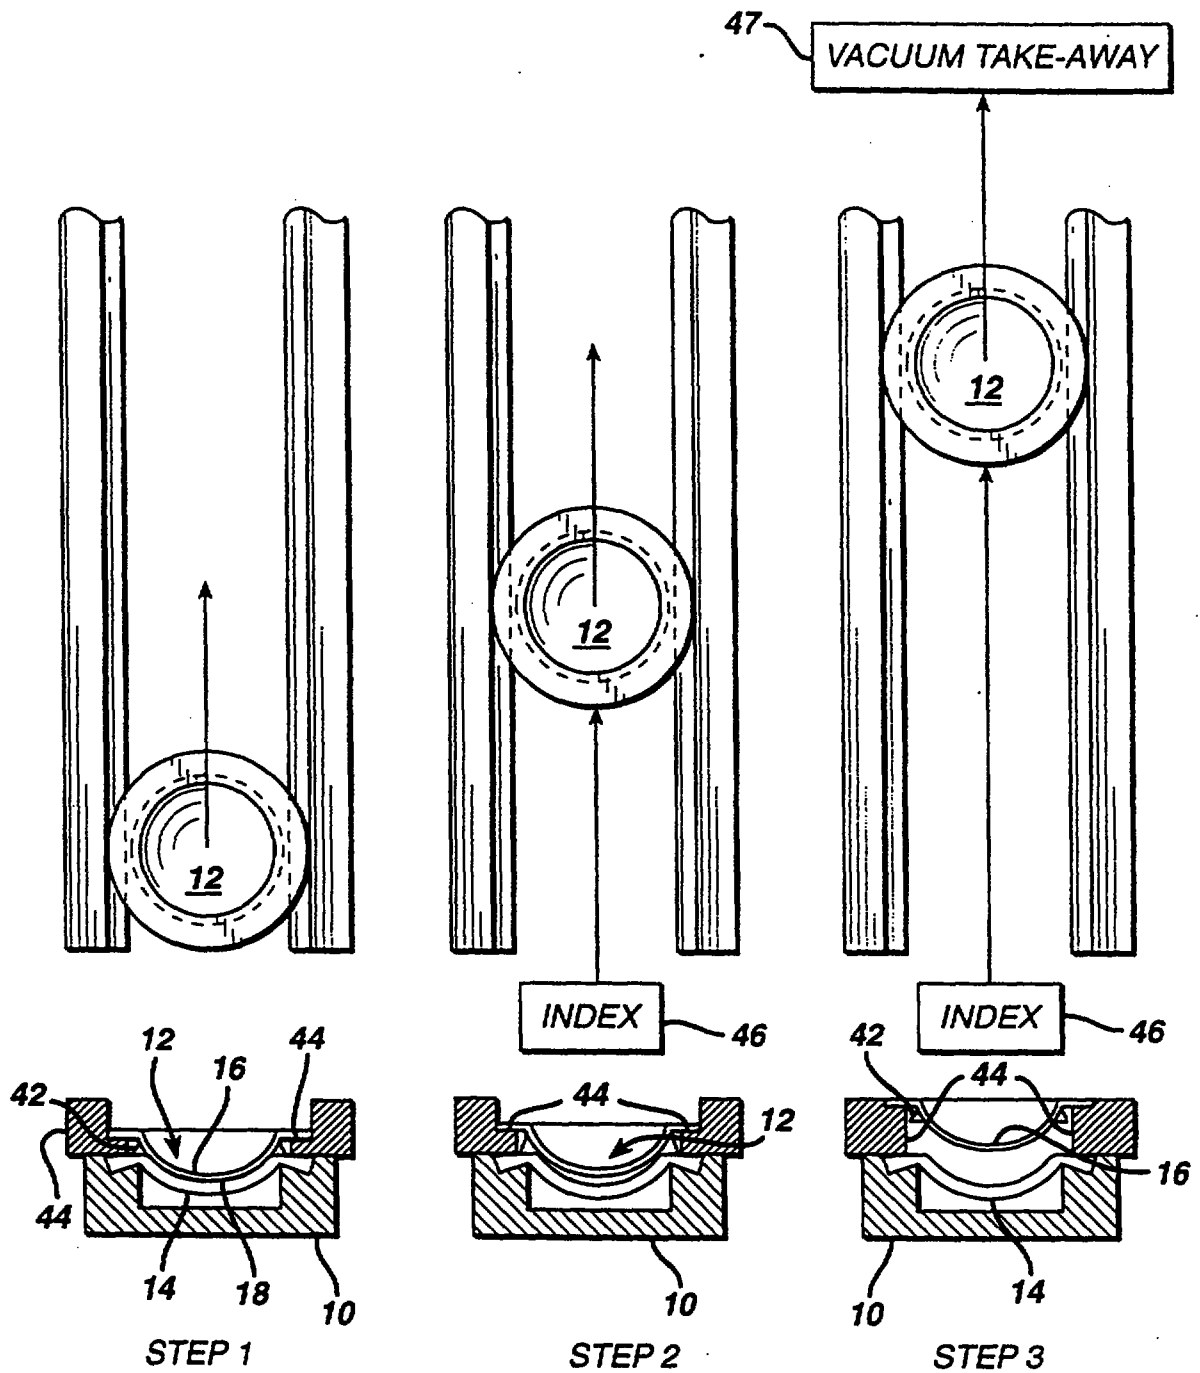


FIG. 4


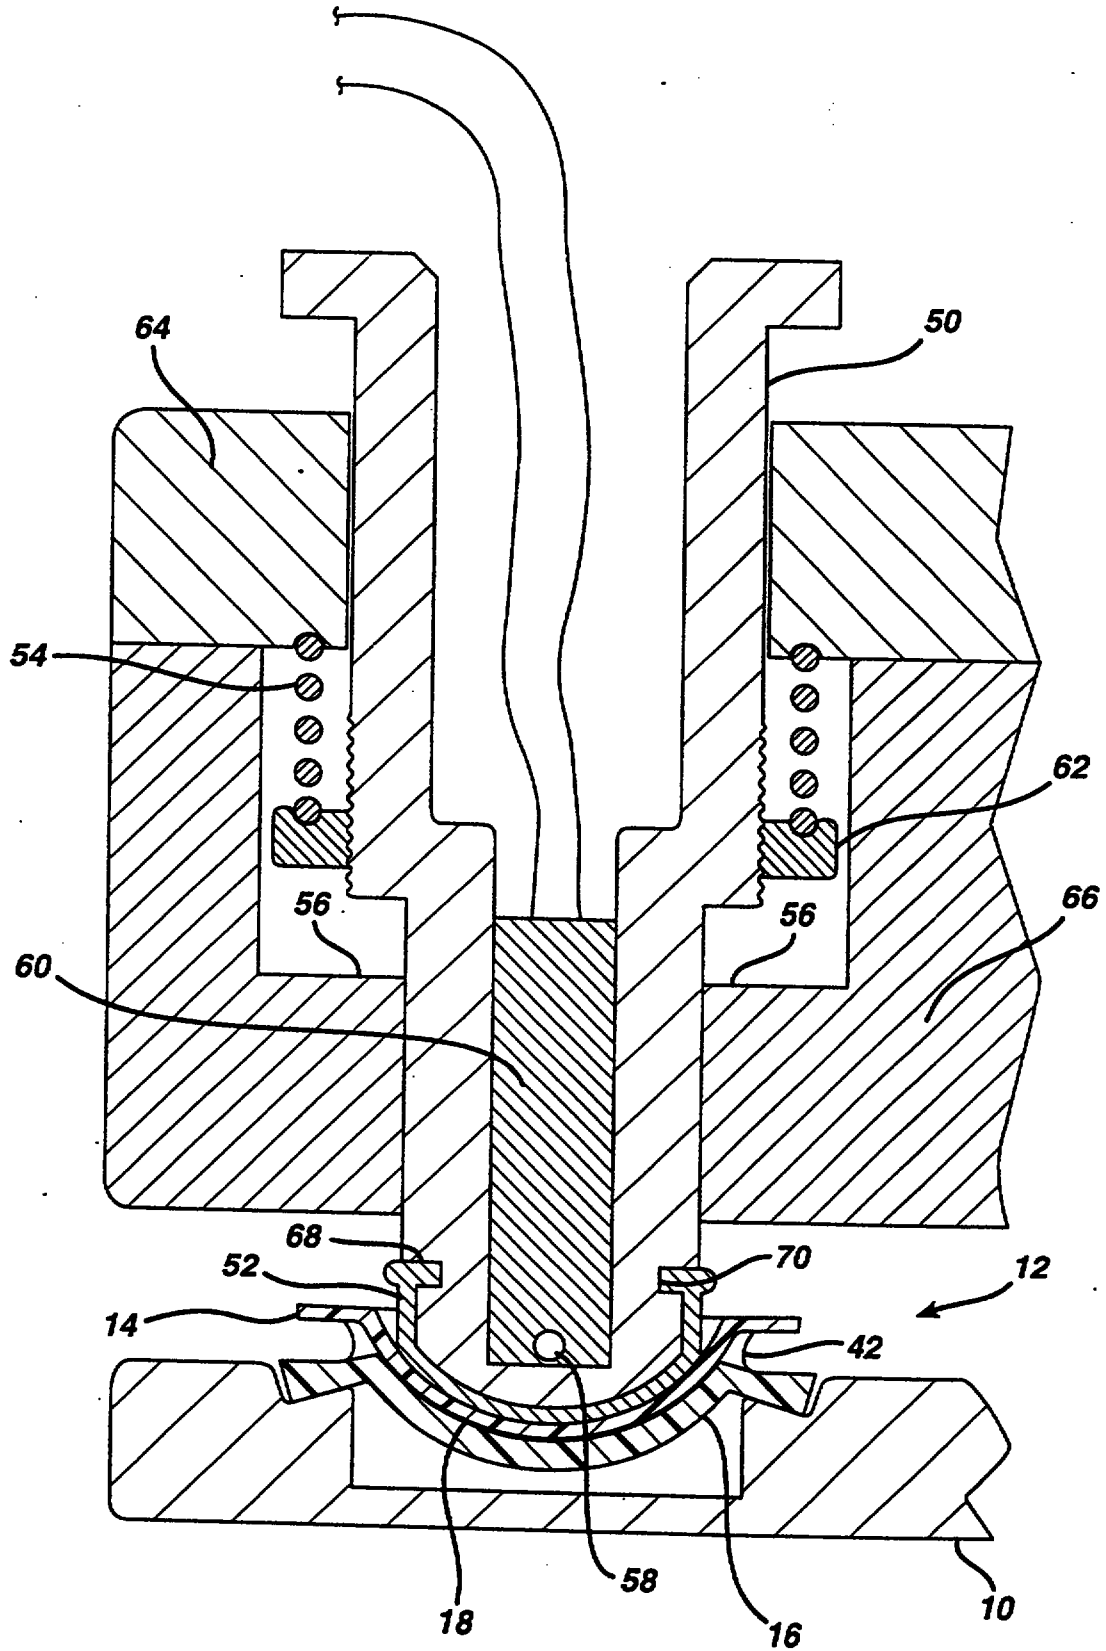


FIG. 5

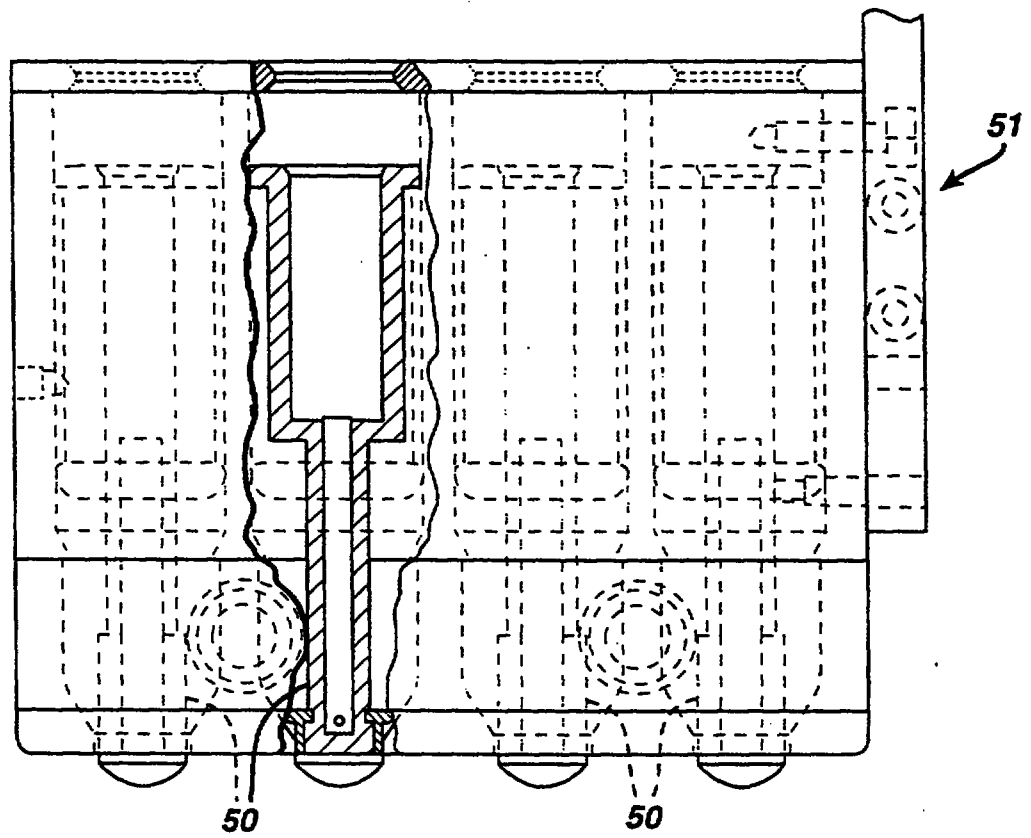

17 OCT 1997

- 6 -

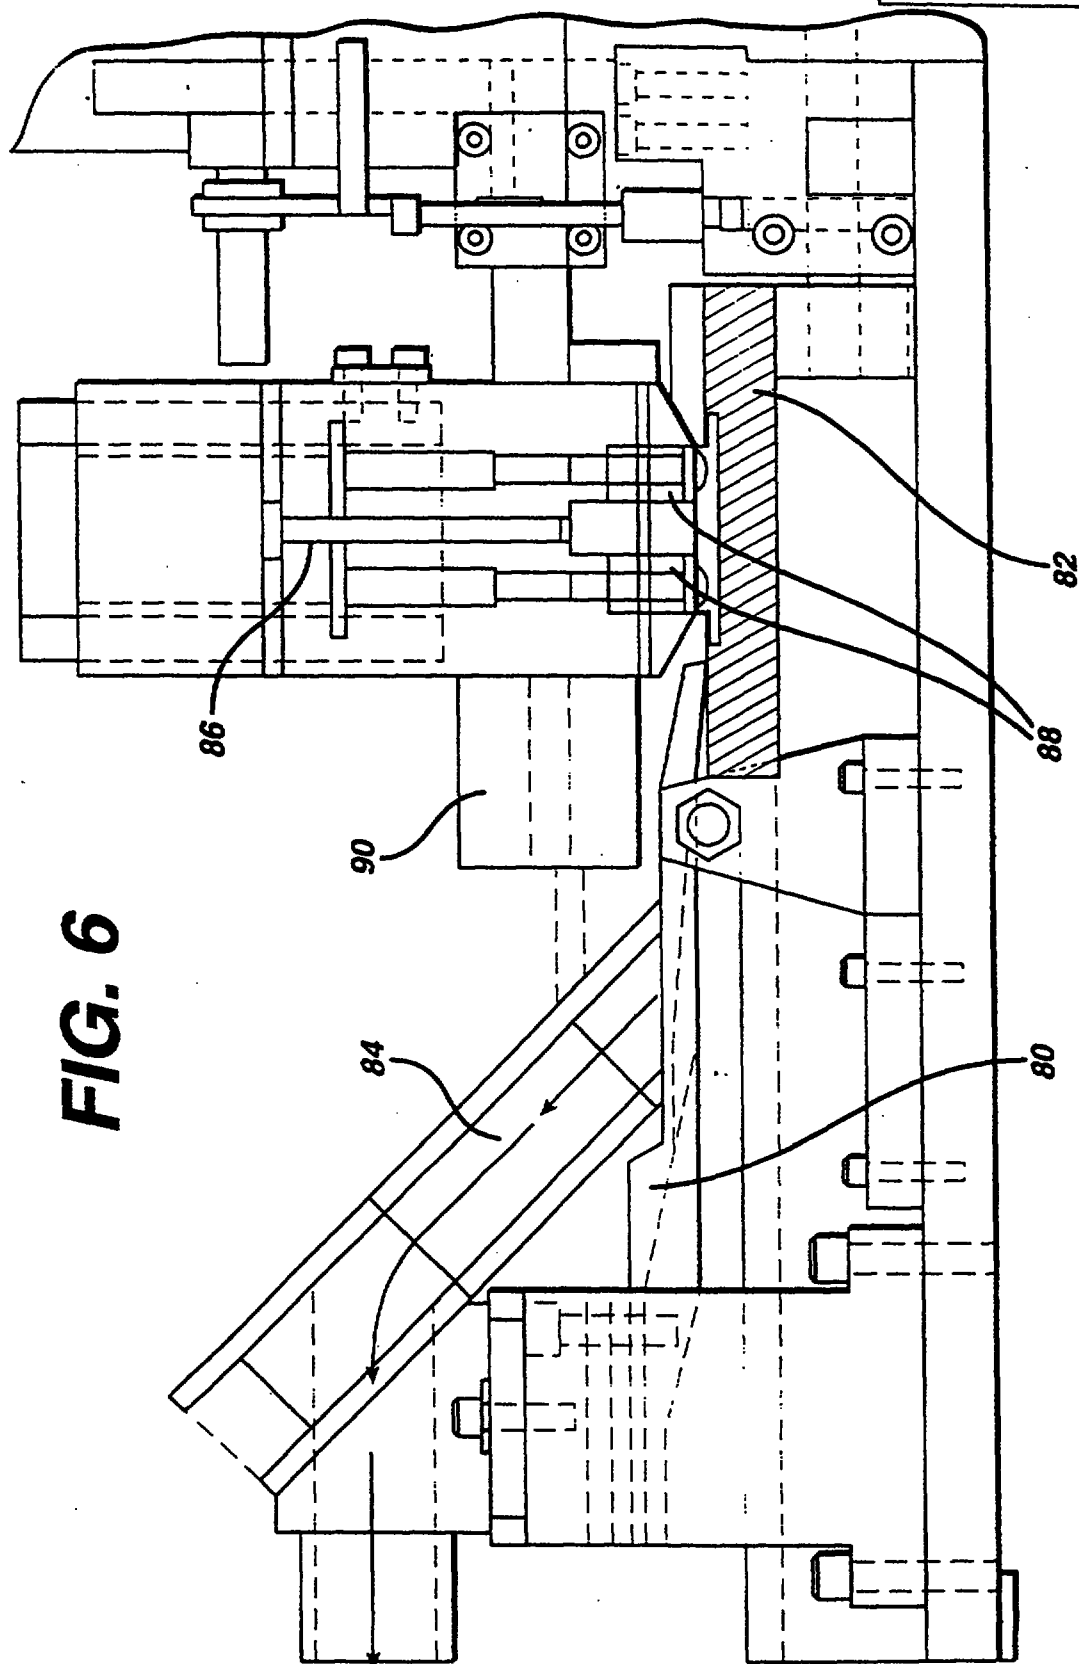


FIG. 6

FIG. 7

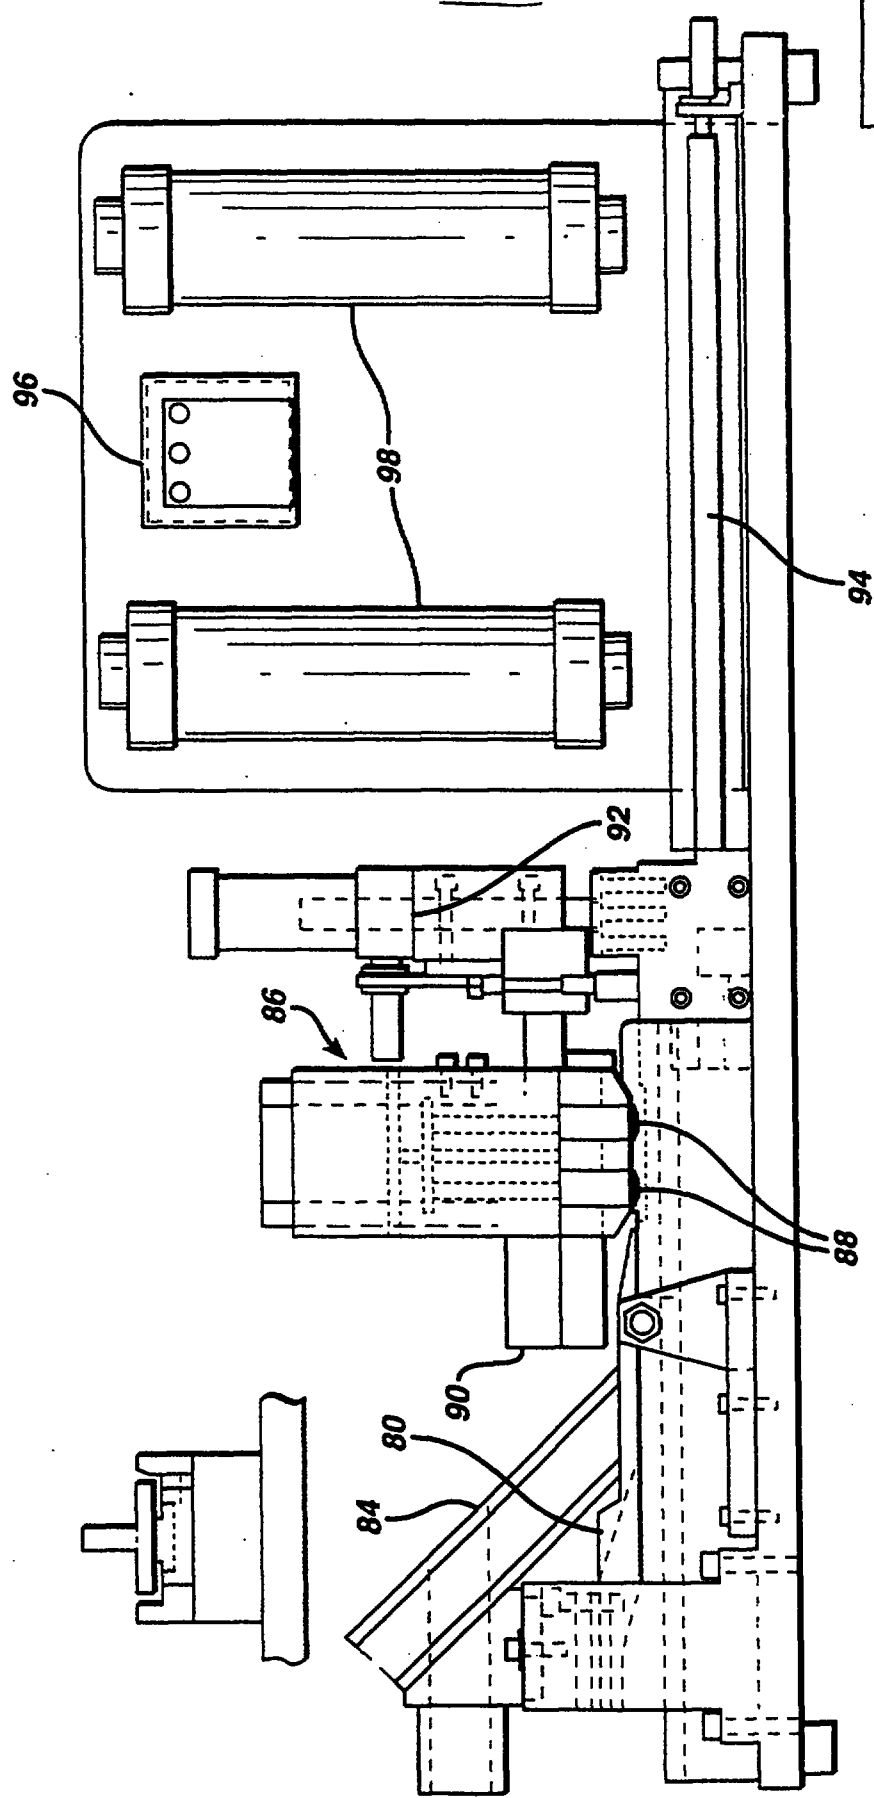


FIG. 8

