



(51) International Patent Classification:

A61B 17/58 (2006.01) A61B 17/88 (2006.01)
A61B 17/86 (2006.01)

(21) International Application Number:

PCT/IB2014/060993

(22) International Filing Date:

24 April 2014 (24.04.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1307521.3 25 April 2013 (25.04.2013) GB
1323173.3 31 December 2013 (31.12.2013) GB

(71) Applicant: MID CORP. [US/US]; Carteret Street, West Orange, New Jersey 07052 (US).

(72) Inventor; and

(71) Applicant (for KZ only): SANDERS, Daniel [IL/IL]; 22 Hatzlil Street, 43396 Ra'anana (IL).

(74) Agent: FISHER, Zeev; 32B Habarzel Street, 6971048 Tel Aviv (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,


BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: TOOL DEVICES FOR SECURING CONNECTOR ELEMENTS

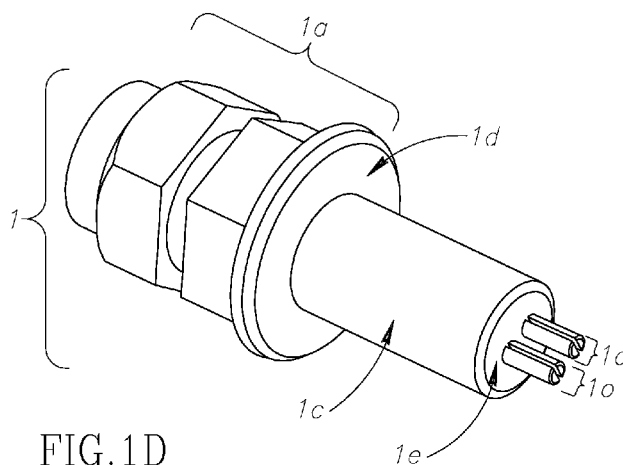

(57) Abstract: A driver tool apparatus is provided for the secure gripping, driving insertion, and release of a broad range of connect- or and/or fixation elements such as screws or bolts. These driver devices can be utilized for a broad range of applications in many fields. The driver tool, in some embodiments, may include a driver shaft; one or more driver elements protruding from the driver shaft and having a base region proximate the driver shaft and a distal region away from the driver shaft, wherein each driver element includes one or more pins suitable for inserting into a socket having one or more inside walls; and one or more securing features on each driver element.