(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
26 May 2005 (26.05.2005)

PCT

(10) International Publication Number
WO 2005/046737 A2

(51) International Patent Classification[7]: A61L

(21) International Application Number:
PCT/US2004/036897

(22) International Filing Date:
4 November 2004 (04.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/701,588 5 November 2003 (05.11.2003) US

(71) Applicant *(for all designated States except US)*: **ETHICON ENDO-SURGERY, INC.** [US/US]; 4545 Creek Road, Cincinnati, OH 45242 (US).


(71) Applicants and
(72) Inventors: **STULEN, Foster, B.** [US/US]; 6245 Bridgewater Court, Mason, OH 45040 (US). **NEUENFELDT, Steven, K.**; 8233 Glenmill Court, Cincinnati, OH 45249 (US). **HOUSER, Kevin, L.**; 570 Foliage Lane, Springboro, OH 45066 (US).

(74) Agents: **JOHNSON, Phillip, S.** et al.; Johnson & Johnson, 1 Johnson & Johnson Plaza, New Brunswick, NJ 08933 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: ULTRASONIC SURGICAL BLADE AND INSTRUMENT HAVING A GAIN STEP

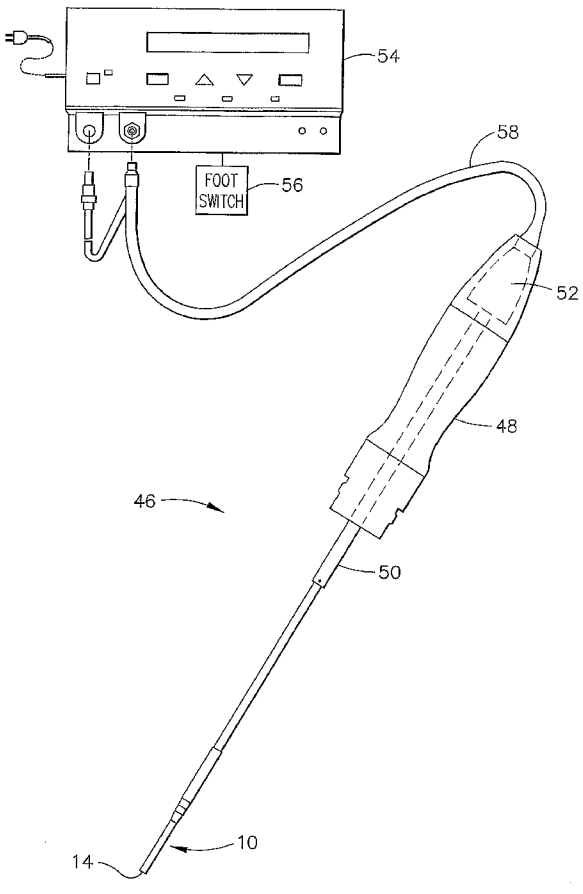

(57) Abstract: An ultrasonic surgical blade, and an instrument, having a gain step. The blade body has, in any half wave length of the ultrasonic-surgical-blade body, a first vibration antinode, a vibration node, a second vibration antinode, and a gain step. The gain step is located between the second vibration antinode and the first vibration antinode. The gain step is spaced apart from the vibration node by a gain-step distance greater than 5% of the distance between the second vibration antinode and the first vibration antinode. The instrument includes the blade, a handpiece having an ultrasonic transducer, and an ultrasonic transmission rod whose proximal end is operatively connected to the ultrasonic transducer and whose distal end activates the blade. In one option, the first vibration antinode is the distal tip, and the gain step is located between the vibration node and the distal tip, resulting in an increased active length of the blade.

WO 2005/046737 A2

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.