



(51) International Patent Classification:
F25D 31/00 (2006.01)

(21) International Application Number:
PCT/IL2010/000740

(22) International Filing Date:
7 September 2010 (07.09.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/240,710 9 September 2009 (09.09.2009) US

(71) Applicant (for all designated States except US):
STRAUSS WATER LTD [IL/IL]; 49 Ha'Sivim Street,
Petach Tikva 49517 (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WILDER, Haim**
[IL/IL]; 7 Yehuda Halevi Street, 43555 Raanana (IL).
RONEN, Rami [IL/IL]; 12 HaGichon Street, 47204 Ra-
mat HaSharon (IL). **KRYSTAL, Eyal** [IL/IL]; 19/17
Hatchia Street, 44250 Kfar Saba (IL). **BAR-ON, Omri**
[IL/IL]; Hachalutz 24 Street, Beit Hakerem, 96222
Jerusalem (IL).

(74) Agent: **REINHOLD COHN AND PARTNERS**; P.O.B.
13239, 61131 Tel Aviv (IL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: TEMPERATURE CONTROL SYSTEM FOR A LIQUID

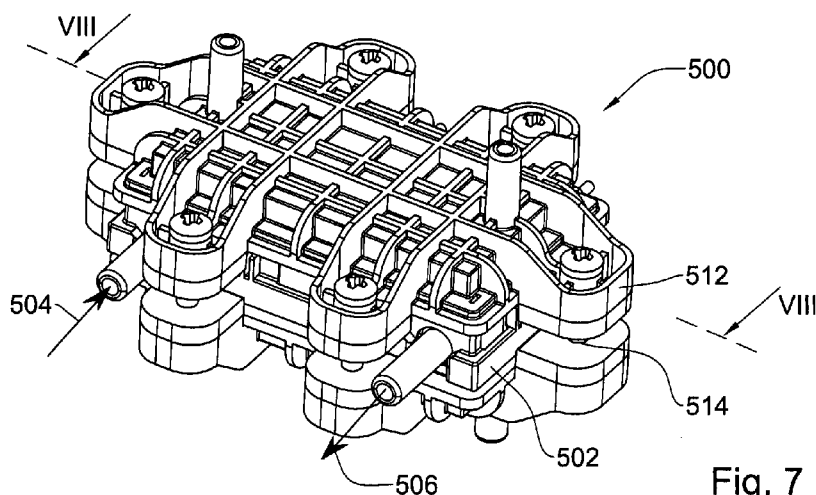


Fig. 7

(57) Abstract: A temperature control system for a liquid comprises two sets of temperature control elements oppositely disposed to one another and define between them a temperature control zone. A conduit system within the temperature control zone defines a liquid flow path that is configured to have one or more first segments in proximity to and in heat-conducting association with one of the two sets and one or more second segments in proximity to and in heat-conducting association with the other of the two sets. The temperature control system may be used as a liquid cooling or heating module in a cold liquid dispensing device or system, such as a drinking water or other beverage dispensing device.

