



- (51) **International Patent Classification:**
E04B 1/19 (2006.01) *G09B 9/00* (2006.01)
- (21) **International Application Number:**
PCT/SG2012/000410
- (22) **International Filing Date:**
31 October 2012 (31.10.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
201210130335.6 28 April 2012 (28.04.2012) CN
- (72) **Inventor; and**
- (71) **Applicant : HOCK PHENG, Tan** [SG/SG]; 8 Boon Lay Way, #10-10 Trade Hub 21, Singapore 609964 (SG).
- (74) **Agent: ALPHA & OMEGA LAW CORPORATION;** 24 Peck Seah Street, #02-12 Nehsons Building, Singapore 079314 (SG).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,


BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** A NARROW SPACE RESCUE TRAINING DEVICE

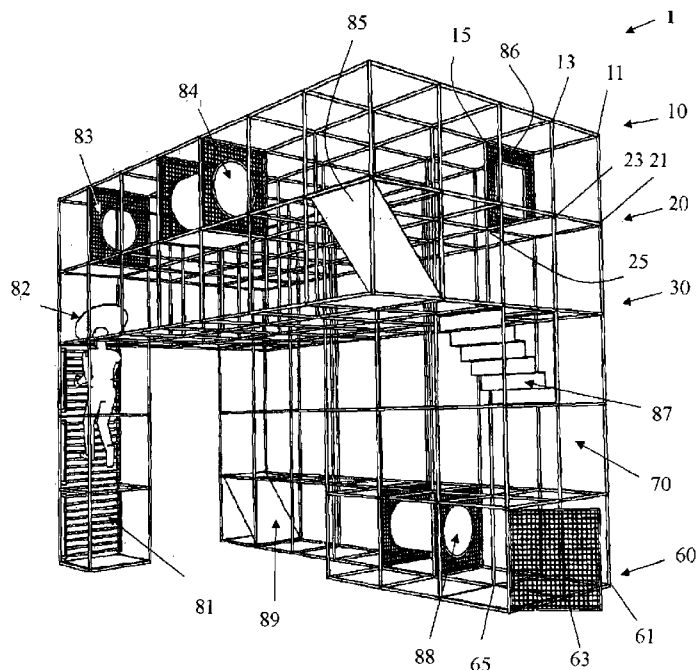

(57) **Abstract:** The present invention provides a narrow space rescue training device (1) in the form of a three dimensional grid framework. This three dimensional grid framework is constructed in layers (10, 20, 30, 60) using multidirectional connectors (11, 13, 15, 33, 35) to plug connect horizontal frame pipes (14, 16, 36, 38) disposed in each layer and plug connect erect frame pipes (40) disposed between two adjacent layers. Barriers (81, 82, 83, etc) are disposed within the framework's space units (70) to create obstacles whilst mesh plates are disposed on floors or walls of the space units to form channels in the training device (1). The training device (1) is reconfigurable to simulate different obstacles and modes of rescue training in narrow spaces. The training device (1) can be disassembled and reassembled into frameworks of various shapes.