



(51) International Patent Classification:

A44B 99/00 (2010.01) A61M 39/12 (2006.01)
F16G 11/12 (2006.01) F16L 3/02 (2006.01)

(21) International Application Number:

PCT/SG2008/000399

(22) International Filing Date:

16 October 2008 (16.10.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(72) Inventor; and

(71) Applicant : PANG, Ah San [SG/SG]; 52 Gardenia Road, Singapore 578842 (SG).

(74) Agent: YU SARN AUDREY & PARTNERS; 17 Upper Circular Road, #03-00 Jura Building, Singapore 058415 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,

EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: A DEVICE FOR SECURING RESILIENT CORD

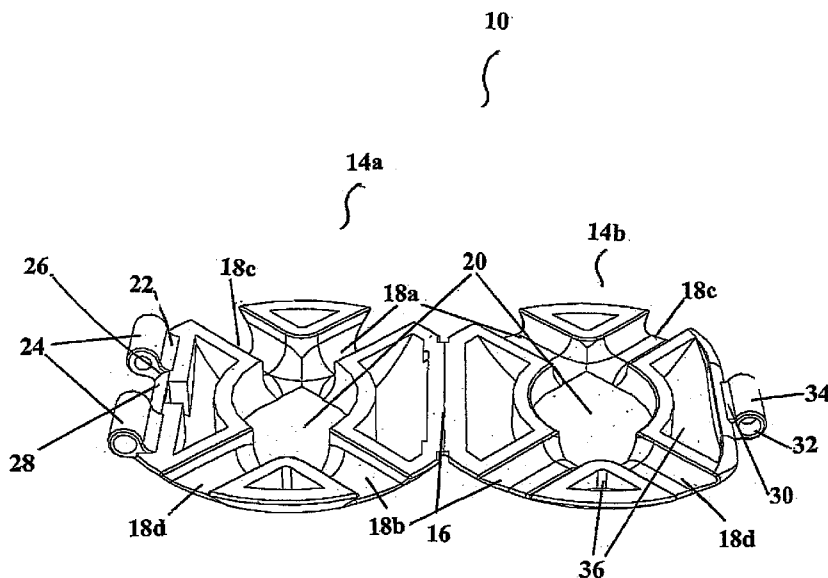


Figure 2

[Continued on next page]



Published:

— *with international search report (Art. 21(3))*

(57) Abstract: The invention provides a device for securing resilient cord and a method for using the same. The device comprising a channel for housing a cord whereby the channel has a wall and is curved to provide a path for the cord that is neither straight nor constricting such that when the device is used to secure the cord the wall of the channel provides a frictional force on the cord under tension.