



(51) International Patent Classification:
A62C 37/11 (2006.01)

(21) International Application Number:

PCT/US2013/061017

(22) International Filing Date:

20 September 2013 (20.09.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/704,430 21 September 2012 (21.09.2012) US
61/724,843 9 November 2012 (09.11.2012) US

(71) Applicant: TYCO FIRE PRODUCTS LP [US/US]; 1400
Pennbrook Parkway, Lansdale, PA 19446 (US).

(72) Inventors: MILLER, Lyle; 18 Bryan Hill Road, Milford,
CT 06460 (US). ANCONE, Mathew, R.; 39 Craig Road,
Warwick, RI 02886 (US).

(74) Agent: LAUB, David, W.; Perkins Coie LLP, 700 Thirteenth
Street, N.W., Suite 600, Washington, DC 20005
(US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: SPRINKLER DEFLECTOR

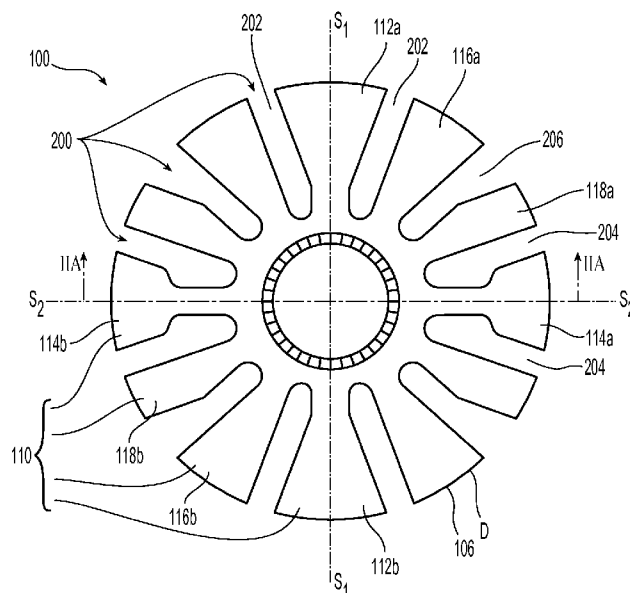


Fig. 2

[Continued on next page]



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

(57) Abstract: A sprinkler assembly including a fluid deflecting structure including a plurality of spaced apart tines defining a plurality of slots. The tines include a first pair of symmetric tines and a second pair of symmetric tines disposed orthogonally to the first pair of symmetric tines. The plurality of slots includes a group of asymmetric slots each having a first portion with a constant width and a second portion with a variable width radially outward of the first portion of the asymmetric slot.