



(51) International Patent Classification:

C04B 37/00 (2006.01) *C09J 161/06* (2006.01)
C08K 3/34 (2006.01) *C09J 171/14* (2006.01)

(21) International Application Number:

PCT/NO2010/000158

(22) International Filing Date:

30 April 2010 (30.04.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20091852 11 May 2009 (11.05.2009) NO

(71) Applicant (for all designated States except US): **ELKEM CARBON AS** [NO/NO]; Hofføveien 65B Majorstua, N-0377 Oslo (NO).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **EGELAND, Bjørn** [NO/NO]; Østskogen Terrasse 17, N-3470 Slemmestad (NO). **HÅBERG, Alf** [NO/NO]; Wolframveien 92, NO-4629 Kristiansand (NO). **JOHANSEN, Johan, Arnold** [NO/NO]; Auglandslia 18C, N-4620 Kristiansand

(NO). **MADSHUS, Stian** [NO/NO]; Kirkeveien 12C, N-4631 Kristiansand (NO).

(74) Agent: **VINDENES, Magne**; c/o Elkem Solar AS Research, IP Department, P.O. Box 8040 Vågsbygd, N-4675 Kristiansand (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: GLUE AND COATING FOR REFRACTORY MATERIALS AND CERAMICS

(57) Abstract: The present invention relates to a heat crucible glue or coating for use in connection with refractory materials and ceramics. The glue or coating comprises 25 to 50 weight % silicon powder, 5 to 20 weight % SiC powder, 20 to 60 weight % formaldehyde resin or polyfurfuryl alcohol and 10 to 30 weight % of an organic solvent.

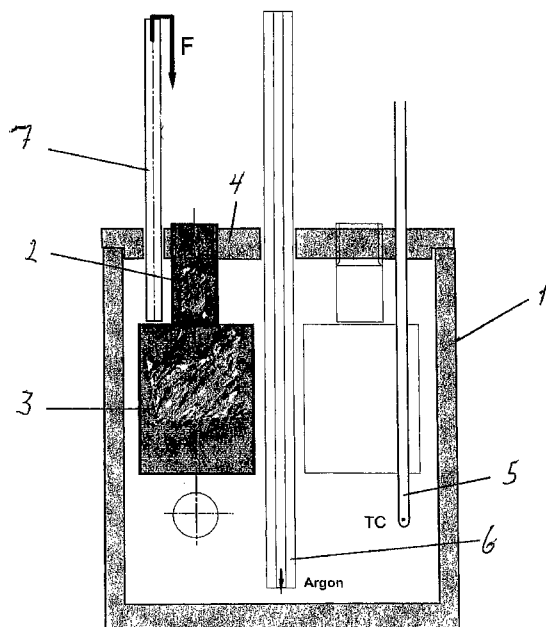


Figure 1



MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, **Published:**
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, — *with international search report (Art. 21(3))*
ML, MR, NE, SN, TD, TG).