

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 April 2005 (28.04.2005)

PCT

(10) International Publication Number
WO 2005/037471 A1

(51) International Patent Classification⁷: **B23B 29/034**,
51/10

(21) International Application Number:
PCT/IL2004/000888

(22) International Filing Date:
22 September 2004 (22.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
158498 20 October 2003 (20.10.2003) IL

(71) Applicant (for all designated States except US): **ISCAR LTD.** [IL/IL]; P.O. Box 11, 24959 Tefen (IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HECHT, Gil** [IL/IL];
30/18 Ahad Ha'am Street, 22443 Nahariya (IL).

(74) Agent: **ISCAR LTD., PATENT DEPARTMENT**;
P.O.Box 11, 24959 Tefen (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ADJUSTABLE DEBURRING TOOL**

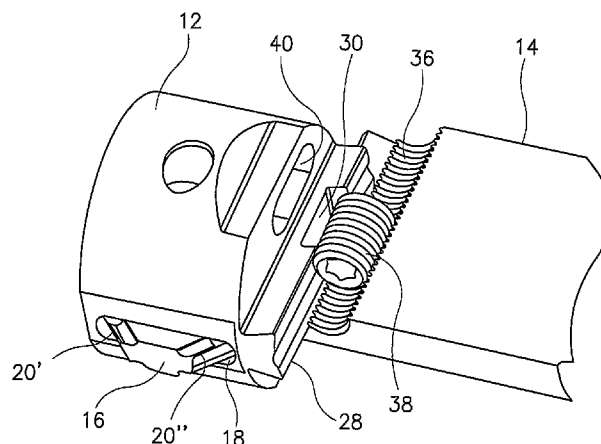

(57) **Abstract:** An adjustable deburring tool has a cutting head (12) and a shank (14). The cutting head has a projecting ridge (28) with a recessed portion (30). The shank has a groove (34) that communicates with an open ended and open sided threaded bore. The ridge is slidably located in the groove with an adjusting screw screw-threaded in the threaded adjusting bore and partially located in the recessed portion of the ridge so that rotation of the adjusting screw causes lateral movement of the cutting head thereby adjusting the cutting diameter of the deburring tool.

WO 2005/037471 A1