



- (51) International Patent Classification:
E21B 23/00 (2006.01)
- (21) International Application Number:
PCT/US2011/043290
- (22) International Filing Date:
8 July 2011 (08.07.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/390,816 7 October 2010 (07.10.2010) US
- (71) Applicant (for all designated States except US): **DRIL-QUIP, INC.** [US/US]; 13550 Hempstead Hwy., Houston, TX 77040 (US).
- (71) Applicant (for US only): **ANTUNES, Denise, A., M.** (executrix for the deceased inventor) [BR/US]; 211 Briar Oaks Cove, Houston, TX 77056 (US).
- (72) Inventor: **REIMERT, Larry** (deceased).
- (74) Agent: **HELMREICH, Loren, G.**; 5851 San Felipe, Suite 975, Houston, TX 77057 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: WEAR BUSHING FOR LOCKING TO A WELLHEAD

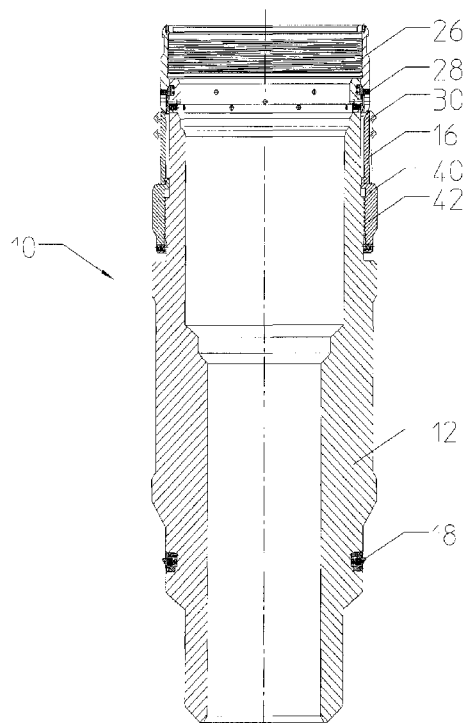


FIGURE 1

(57) Abstract: A wear bushing (10) and a running tool (32) are provided for a subsea wellhead assembly including a wellhead housing and a casing hanger. The wear bushing is landed on the casing hanger, and a connector (16) axially connects the wear bushing and the wellhead housing. The running tool is actuated to connect the wear bushing, such that at least a portion of the connector is received within a corresponding recess in an interior wall of the wellhead housing. A bushing / casing hanger latch (18) axially connects the wear bushing and the casing hanger.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with amended claims (Art. 19(1))*
GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*