



- (51) **International Patent Classification:**
E21B 17/02 (2006.01) *F16L 15/02* (2006.01)
- (21) **International Application Number:**
PCT/US2012/056495
- (22) **International Filing Date:**
21 September 2012 (21.09.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/242,946 23 September 2011 (23.09.2011) US
- (71) **Applicant: CAMERON INTERNATIONAL CORPORATION** [US/US]; 1333 West Loop South, Suite 1700, Houston, Texas 77027 (US).
- (72) **Inventor: GUIDRY, Kirk, P.;** Cameron International Corporation, 4646 W. Sam Houston Parkway N., Houston, Texas 77041 (US).
- (74) **Agent: EUBANKS, Lee, L., IV.;** Eubanks PLLC, 19500 State Highway 249, Suite 465, Houston, TX 77070 (US).

- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** ADJUSTABLE FRACTURING HEAD AND MANIFOLD SYSTEM

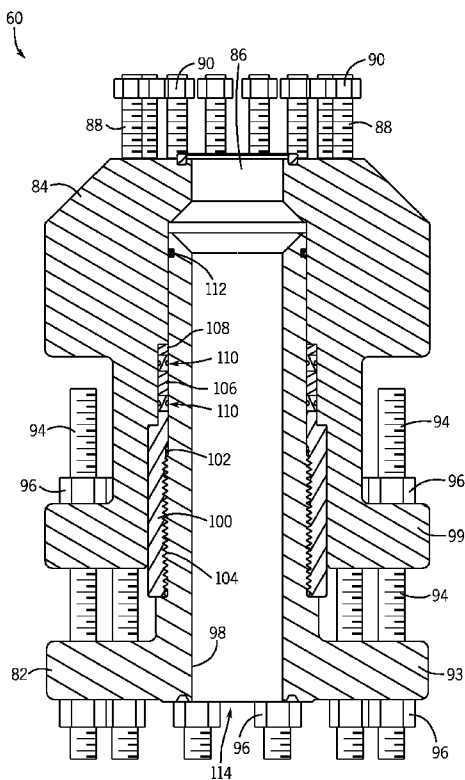


FIG. 5

(57) **Abstract:** An adjustable fracturing system (10) is provided. In one embodiment, the system includes a fracturing head (60, 62, 64) having an adjustable body with a first portion (82) and a second portion (84) that enable variation in a dimension of the fracturing head. The system may also include a fracturing manifold (22) coupled to a fracturing tree (20), and the fracturing head may facilitate connection of the fracturing manifold to the fracturing tree through variation of the dimension of the fracturing head. Additional systems, devices, and methods are also disclosed.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*