(2004068474)
24/11/04

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
4 December 2003 (04.12.2003)

PCT

(10) International Publication Number
WO 03/100391 A1

(51) International Patent Classification[7]: G01N 21/00

(21) International Application Number: PCT/US03/16440

(22) International Filing Date: 23 May 2003 (23.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/383,024 24 May 2002 (24.05.2002) US

(71) Applicant *(for all designated States except US)*: **MYKROLIS CORPORATION** [US/US]; 129 Concord Road, Billerica, MA 01821-4600 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **TISON, Stuart, A.** [US/US]; 1513 West Mont Drive, McKinney, TX 75070 (US). **LU, Shiliang** [US/US]; 3325 Spring Mountain Drive, Plano, TX 75025 (US).

(74) Agent: **BERRIER, Mark, L.**; Gray Cary Ware & Freidenrich LLP, 1221 S. MoPac Expressway, Suite 400, Austin, TX 78746-6875 (US).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR MASS FLOW DETECTION DEVICE CALIBRATION

(57) Abstract: A system and method for detecting a fluid flow where a fluid passing through a conduit (310) passes through detection electronics (330, 320, and 340) producing signals indicative of the fluid flow in sensor electronic control means (350).

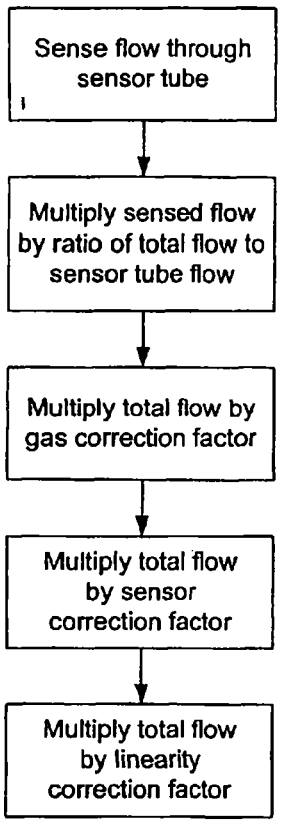

WO 03/100391 A1





Published:
— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.