

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
01 May 2025 (01.05.2025)



(10) International Publication Number
WO 2025/087811 A1

(51) International Patent Classification:

F16K 1/50 (2006.01) *F16K 27/02* (2006.01)
F16K 11/04 (2006.01)

(21) International Application Number:

PCT/EP2024/079533

(22) International Filing Date:

18 October 2024 (18.10.2024)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

23306861.8 24 October 2023 (24.10.2023) EP

(71) Applicant: **ABB SCHWEIZ AG** [CH/CH]; Brugger-
strasse 66, 5400 BADEN (CH).

(72) Inventors: **CAILLOT, Alexandre**; 95 route d'An-
necy, 74540 VIUZ-LA-CHIESAZ (FR). **LEHONGRE,**
Matthieu; 210 rue des Jardins de Bérénice, 38530
PONTCHARRA (FR).


(74) Agent: **CABINET GERMAIN ET MAUREAU**; 12 rue
Boileau, 69006 LYON (FR).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,

(54) Title: VALVE WITH ANTI-ROTATION SYSTEM

Fig.1

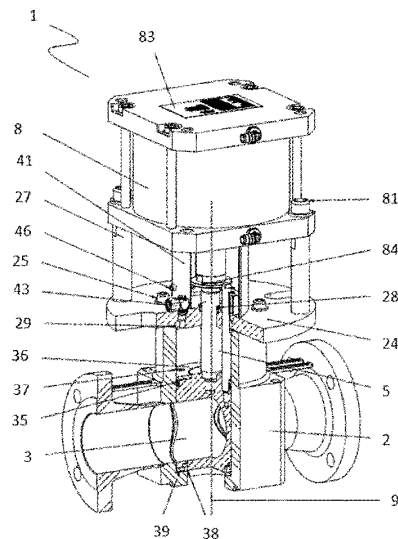

(57) Abstract: Valve (1) for establishing communication between a first pipe and a second pipe, comprising: a stationary body (2) comprising an internal chamber communicating with the first pipe and and with the second pipe, a shut-off element (3) slidably mounted within the internal chamber of the stationary body (2) and being movable in translation along a translation axis (9) between an open position and a close position and an anti-rotation device comprising an anti-rotation element secured to the shut-off element (3) and configured to prevent the shut-off element (3) from rotating around the translation axis (9) within the internal chamber.

[Continued on next page]

LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*