

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 July 2007 (05.07.2007)

PCT

(10) International Publication Number
WO 2007/075756 A3

(51) International Patent Classification:
E21B 47/08 (2006.01)

(21) International Application Number:
PCT/US2006/048549

(22) International Filing Date:
18 December 2006 (18.12.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/751,361 16 December 2005 (16.12.2005) US

(71) Applicant (for all designated States except US): **LOAD-TEST, INC.** [US/US]; 2631 N.W.41st Street, Gainesville, FL 32606 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HAYES, John, A.** [US/US]; 2631 N.W.41st Street, Gainesville, FL 32606 (US).


(74) Agents: **PARKER, James, S.** et al.; Saliwanchik, Lloyd & Saliwanchik, A Professional Association, P.O. Box 142950, Gainesville, FL 32614-2950 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR INVESTIGATING A BOREHOLE WITH A CALIPER

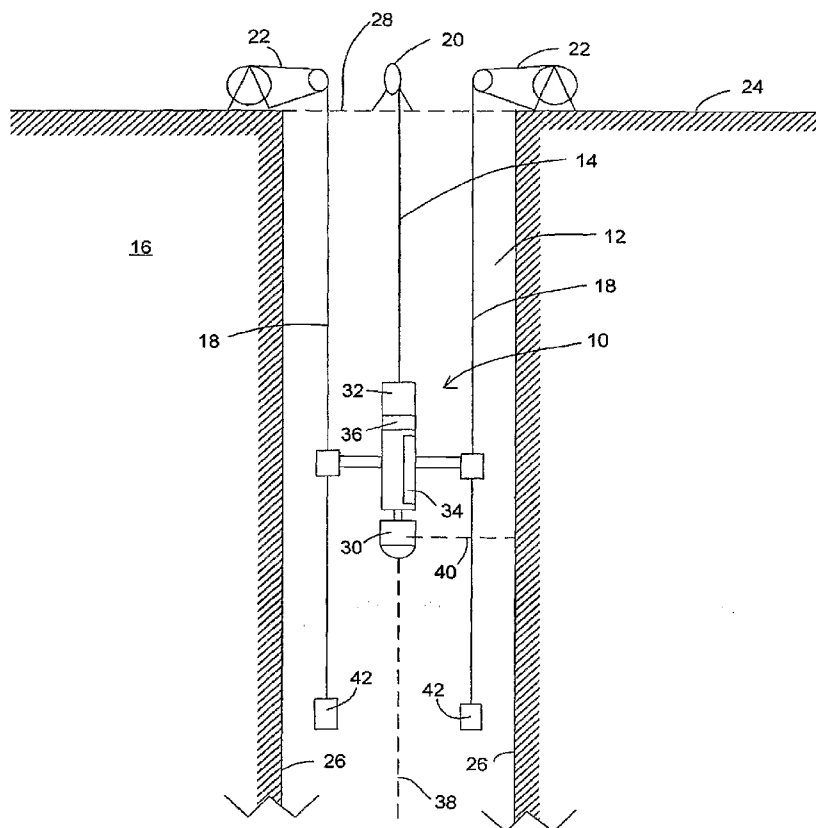

(57) Abstract: An apparatus for investigating a formation, comprises a caliper provided with a transmitter for transmitting a transmitted pulse signal; a detector for detecting a reflected pulse signal, wherein the reflected pulse signal is the transmitted pulse signal reflected from a target location on a surface of the formation onto which the transmitted pulse signal is incident; a means for determining the time interval between the transmission of the transmitted pulse signal and the detection of the reflected pulse signal; a means for rotating the transmitter and the detector with respect to the axis of the caliper, wherein rotation of the transmitter and the detector causes the target location on the surface of the formation onto which the transmitted pulse signal is incident to rotate with respect to the axis of the caliper. A corresponding method is also disclosed.



Published:

— with international search report

(88) Date of publication of the international search report:

30 August 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.