

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2019 年 5 月 23 日 (23.05.2019)



(10) 国际公布号
WO 2019/095220 A1

(51) 国际专利分类号:
H04L 1/00 (2006.01)

(21) 国际申请号: PCT/CN2017/111390

(22) 国际申请日: 2017 年 11 月 16 日 (16.11.2017)

(25) 申请语言: 中文

(26) 公布语言: 中文

(71) 申请人: **OPPO 广东移动通信有限公司 (GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD.)** [CN/CN]; 中国广东省东莞市长安镇乌沙海滨路 18 号, Guangdong 523860 (CN)。

(72) 发明人: **唐海 (TANG, Hai)**; 中国广东省东莞市长安镇乌沙海滨路 18 号, Guangdong 523860 (CN)。


(74) 代理人: 北京派特恩知识产权代理有限公司 (**CHINA PAT INTELLECTUAL PROPERTY OFFICE**); 中国北京市海淀区海淀南路 21 号中关村知识产权大厦 B 座 2 层, Beijing 100080 (CN)。

(81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。

(84) 指定国 (除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ,

(54) **Title:** METHOD AND DEVICE FOR RECEIVING INFORMATION, AND COMPUTER-READABLE MEDIUM

(54) 发明名称: 一种接收信息的方法、设备及计算机可读介质

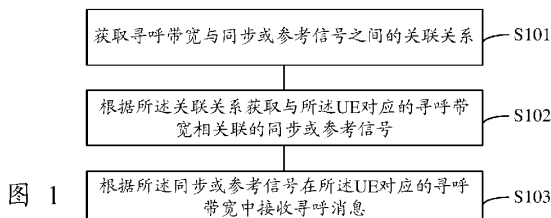

S101 ACQUIRE CORRELATIONS BETWEEN PAGING BANDWIDTHS AND SYNCHRONIZATION OR REFERENCE SIGNALS
S102 ACQUIRE, ON THE BASIS OF THE CORRELATIONS, A SYNCHRONIZATION OR REFERENCE SIGNAL ASSOCIATED WITH A PAGING BANDWIDTH CORRESPONDING TO THE UE
S103 RECEIVE, ON THE BASIS OF THE SYNCHRONIZATION OR REFERENCE SIGNAL, A PAGING MESSAGE IN THE PAGING BANDWIDTH CORRESPONDING TO THE UE

(57) **Abstract:** Provided in embodiments of the present invention are a method and device for receiving information, and a computer-readable medium. The method may comprise: acquiring correlations between paging bandwidths and synchronization or reference signals; acquiring, on the basis of the correlations, a synchronization or reference signal associated with a paging bandwidth corresponding to the UE; and receiving, on the basis of the synchronization or reference signal, a paging message in the paging bandwidth corresponding to the UE. The technical solution of the embodiments of the present invention allows the UE to more accurately receive the paging message, thus increasing the rate of success of the UE in receiving the paging message in the paging bandwidth corresponding to self.

(57) **摘要:** 本发明实施例提供了一种接收信息的方法、设备及计算机可读介质; 该方法可以包括: 获取寻呼带宽与同步或参考信号之间的关联关系; 根据所述关联关系获取与所述UE对应的寻呼带宽相关联的同步或参考信号; 根据所述同步或参考信号在所述UE对应的寻呼带宽中接收寻呼消息。通过本发明实施例的技术方案, 使得UE能够更加准确的接收到寻呼消息, 提高了UE在自身对应的寻呼带宽中接收寻呼消息的成功率。

[见续页]

NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布：

— 包括国际检索报告 (条约第21条(3))。