(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 January 2010 (28.01.2010)

PCT

(10) International Publication Number
WO 2010/011486 A1

(51) International Patent Classification:
E21B 43/04 (2006.01)

(21) International Application Number:
PCT/US2009/049650

(22) International Filing Date:
3 July 2009 (03.07.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/180,105 25 July 2008 (25.07.2008) US

(71) Applicant *(for all designated States except US)*: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 2601 Belt Line Road, Carrollton, TX 75006 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **RICHARDS, William Mark** [US/US]; 2601 Belt Line Road, Carrollton, TX 75006 (US). **GRIGSBY, Tommy F.** [US/US]; 2601 Belt Line Road, Carrollton, TX 75006 (US).

(74) Agent: **SMITH, Marlin R.**; Smith Ip Services, P.c., P.o. Box 997, Rockwall, TX 75087 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

[Continued on next page]

(54) Title: SECUREMENT OF LINES TO WELL SAND CONTROL SCREENS

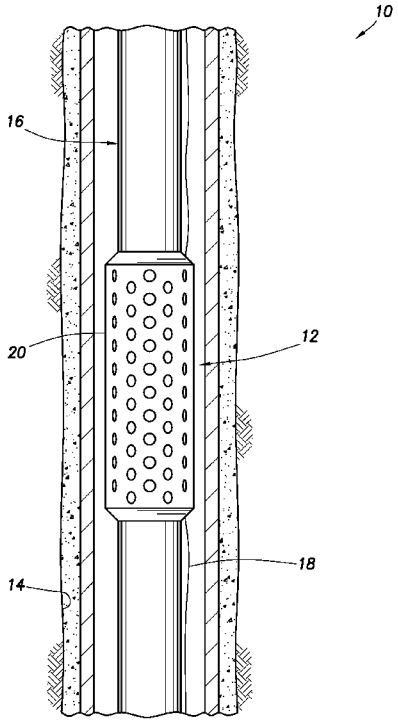


FIG. 1

(57) Abstract: Systems and methods for securing lines to well sand control screens. A method of securing at least one line to a tubular string includes connecting together longitudinal ends of longitudinal sections of the tubular string; then wrapping a shroud circumferentially about the connected tubular string sections; and securing the line to the shroud. A well screen assembly includes a generally tubular filter portion, a shroud wrapped circumferentially about the filter portion, and a retainer which connects opposite circumferential ends of the shroud to each other without being welded to at least one of the shroud ends, with the retainer being positioned on an interior of the shroud. Another well screen assembly includes multiple longitudinal sections of a tubular string, at least one of the longitudinal sections comprising a well screen, and a shroud wrapped circumferentially about the tubular string sections and rotationally secured to the tubular string.

WO 2010/011486 A1

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*