

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 March 2006 (09.03.2006)

PCT

(10) International Publication Number
WO 2006/026415 A3

(51) International Patent Classification:

H01M 4/02 (2006.01) *H01M 10/36* (2006.01)
H01M 4/58 (2006.01) *H01M 6/16* (2006.01)
H01M 10/40 (2006.01)

(21) International Application Number:

PCT/US2005/030379

(22) International Filing Date: 25 August 2005 (25.08.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

10/928,943 27 August 2004 (27.08.2004) US
10/943,169 16 September 2004 (16.09.2004) US
11/204,694 16 August 2005 (16.08.2005) US

(71) Applicant (for all designated States except US): **EVEREADY BATTERY COMPANY, INC.** [US/US]; 533 Maryville University Drive, St. Louis, MO 63141 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WEBBER, Andrew, A.** [GB/US]; 32611 Greenwood Dr., Avon Lake, OH 44012 (US). **KAPLIN, David, A.** [US/US]; 1167 Bonnie Lane, Mayfield Heights, OH 44124 (US).

(74) Agent: **TOYE, Russell, H, Jr.**; Eveready Battery Company, Inc., 25225 Detroit Road, Westlake, OH 44145 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: LOW TEMPERATURE Li/FeS₂ BATTERY

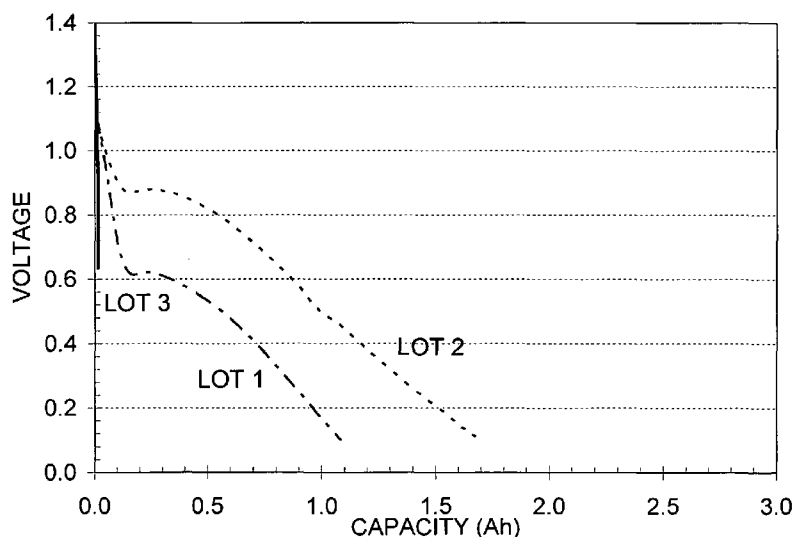

(57) Abstract: The invention is an electrochemical battery cell, such as a Li/FeS₂ cell, with a nonaqueous liquid electrolyte having a solvent with a high ether content and a solute including LiI and one or more additional salts, preferably LiCF₃SO₃, that can avoid a sharp drop in voltage on high rate and high power discharge at low temperatures, while still providing reasonable capacity on high rate and high power discharge at room temperature. The electrolyte solvent includes 1,3-dioxolane and 1,2-dimethoxyethan in a volume ratio greater than 45 : 55 and less than 85 : 15. When the total solute concentration in the electrolyte is low (0.40 to 0.65 mol/l solvent), the solute contains at least 35 mole percent LiI, and when the total solute concentration in the electrolyte is high (greater than 0.65 to 2.0 mol/l solvent), the solute contains less than 35 mole percent LiI.

WO 2006/026415 A3



(88) Date of publication of the international search report:

28 September 2006

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.