



(51) International Patent Classification:
A63C 17/08 (2006.01)

(21) International Application Number:
PCT/DK2009/000028

(22) International Filing Date:
4 February 2009 (04.02.2009)

(25) Filing Language: Danish

(26) Publication Language: English

(30) Priority Data:
PA 2008 00208 14 February 2008 (14.02.2008) DK
PA 2008 01138 21 August 2008 (21.08.2008) DK

(71) Applicant (for all designated States except US): **MK PARTNER HOLDING APS** [DK/DK]; Mosevangen 1, DK-6710 Esbjerg V (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KRISTIANSEN, Morten** [DK/DK]; Kuffen 2, DK-6710 Esbjerg V (DK).

(74) Agent: **LARSEN & BIRKEHOLM A/S**; Skandinavisk Patentbureau, Banegårdspladsen 1, P.O. Box 362, DK-1570 Copenhagen V (DK).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

(54) Title: A SKATEBOARD

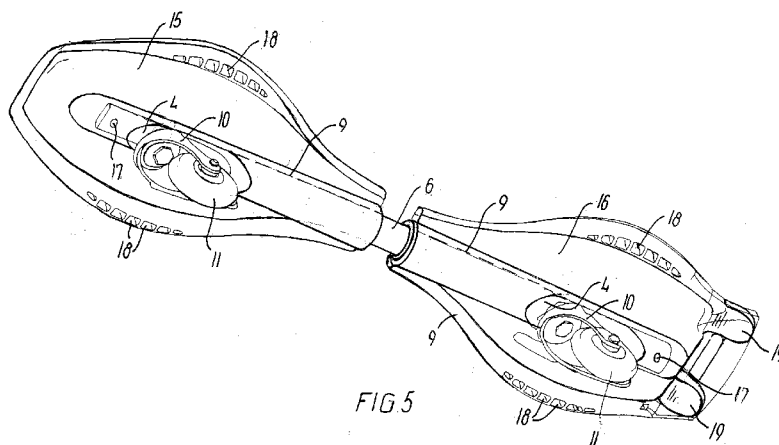

(57) Abstract: A skateboard with two wheels (11), said skateboard having a front plate (15) and a rear plate (16) which are connected with each other by a spring element (3), which is secured to a rod (1 and 2) at both ends of the spring element (3). The two wheels (11), the front plate (15) and the rear plate (16) are secured inclined (4) to the rod (8, 11) by means of screw connections (4, 12) to form an angle relative to the upper sides of the plates (15 and 16). In this manner, the front plate (15) and the rear plate (16) are protected against breaks, as the wheels (11) are not secured directly to the front plate (15) and the rear plate (16), but to the rods (1 and 2) with the spring element (13).

