

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 September 2003 (04.09.2003)

PCT

(10) International Publication Number
WO 03/073029 A1

(51) International Patent Classification⁷: **F25D 17/06**

(21) International Application Number: PCT/US02/05636

(22) International Filing Date: 25 February 2002 (25.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **WORLD-WIDE WATER, L.L.C.** [US/US]; 101 Convention Center Drive - Plaza 117, Las Vegas, NV 89109-2001 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FORSBERG, Francis, C.** [US/US]; 206 Mountain Springs Drive, Boerne, TX 78006 (US). **COLBERT, Clayton** [US/US]; 1747 S. Barrington Avenue, Los Angeles, CA 90025 (US).


(74) Agents: **HUFF, Pamela, B.** et al.; Cox & Smith Incorporated, Suite 1800, 112 East Pecan Street., San Antonio, TX 78205 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent

[Continued on next page]

(54) Title: PORTABLE, POTABLE WATER RECOVERY AND DISPENSING APPARATUS

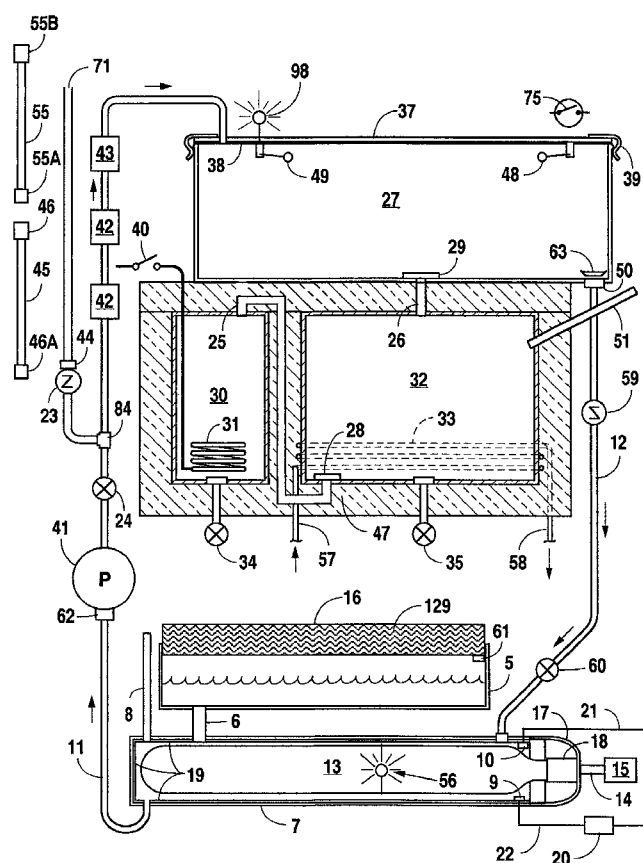

(57) Abstract: A portable, potable-water generator for producing high-purity liquid water by condensation of water vapor from ambient air. The generator (125) employs an air filter (119) to remove particulates and aerosols from the incoming air. An enclosed heat absorber cools the filtered air to its dew point and collects droplets of condensate into a condensate collector (5). Before discharge, the collected dew is treated in a bacteriostat loop to destroy adventitious living organisms and to filter out undesirable and dangerous contaminants. A recirculation loop provides the ability to recirculate stored condensate, including during periods of inactivity. Further, quick disconnect fittings (55b) and variable length flexible tubing allows use of the invention to serve remote dispensers and/or appliances and allow use of municipal water treated through the apparatus in low condensate situations.



WO 03/073029 A1



(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.