

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 September 2006 (21.09.2006)

PCT

(10) International Publication Number
WO 2006/099180 A2

(51) International Patent Classification:
H04L 12/56 (2006.01)

(21) International Application Number:

PCT/US2006/008673

(22) International Filing Date: 10 March 2006 (10.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/660,863 11 March 2005 (11.03.2005) US

11/371,969 9 March 2006 (09.03.2006) US

(71) Applicant (for all designated States except US): **INTER-DIGITAL TECHNOLOGY CORPORATION** [US/US];
300 Delaware Avenue, Suite 527, Wilmington, Delaware
19801 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **OLVERA-HERNANDEZ, Ulises** [MX/CA]; 2 Rolland Laniel, Kirkland,
Québec H9J 4A5 (CA).


(74) Agent: **BALLARINI, Robert, J.**; VOLPE AND
KOENIG, P.C., United Plaza, Suite 1600, 30 S. 17th
Street, Philadelphia, Pennsylvania 19103 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI,
NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,
SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

[Continued on next page]

(54) Title: MESH NETWORK CONFIGURED TO AUTONOMOUSLY COMMISSION A NETWORK AND MANAGE THE NETWORK TOPOLOGY

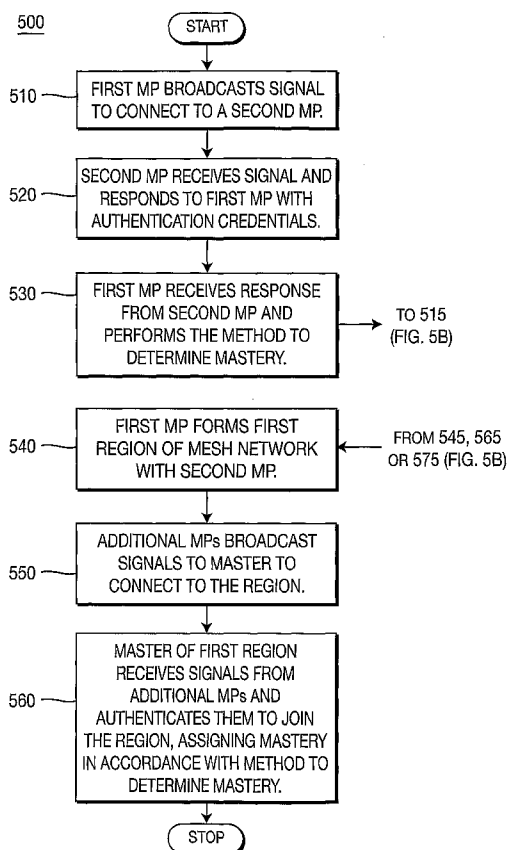

(57) Abstract: In a wireless communication system, a method for commissioning and managing communication between a plurality of mesh points (MPs) comprises a first MP broadcasting a signal to a second MP to establish communication with the second MP. The second MP transmits a response signal to the first MP. The first MP authenticates the second MP and determines a master MP, and the first MP establishes the communication with the second MP.



RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*