

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 January 2003 (30.01.2003)

PCT

(10) International Publication Number
WO 03/009122 A1

(51) International Patent Classification⁷: **G06F 3/023**, 3/02

(21) International Application Number: PCT/IN02/00151

(22) International Filing Date: 17 July 2002 (17.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1018584 19 July 2001 (19.07.2001) NL

(71) Applicant and

(72) Inventor: **SHANKAR, Vineet** [IN/IN]; 119, Sector 36 A,
160036 Chandigarh (IN).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor: **TE MAARSEN, Johannes**; Marhulzen 1,
NL-7141 HD Groenlo (NL).


Published:

— with international search report

(74) Agents: **CHADHA, Chetan** et al.; CHADHA & CHADHA, Intellectual Property Law Firm, F-171, Ghaf-far Market, Karol Bagh, 110005 New Delhi (IN).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **KEYBOARD**

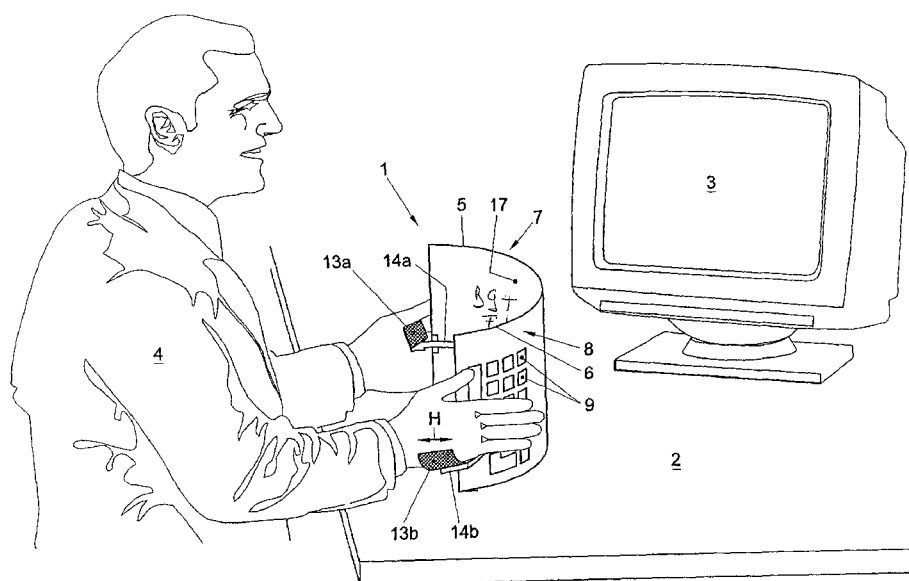

(57) **Abstract:** A keyboard comprising a left and a right keyboard portion which are intended to be operated on a respective operation side by a left hand and right hand, respectively, wherein the operation side (7, 8) of each keyboard portion (5, 6) includes an angle in the range of about 60-150 degrees with a horizontal plane, the keyboard (1) being provided with left and right supporting means (13, 14; 15) for supporting the left and right hand, respectively, during operation of the respective keyboard portion (5, 6), the supporting means (13, 14; 15) being arranged to permit during use a substantially horizontal displacement of the hands supported thereon relative to the respective keyboard portion (5, 6).



WO 03/009122 A1