



(51) International Patent Classification:

E21B 43/12 (2006.01) *E21B 43/11* (2006.01)
E21B 43/08 (2006.01)

(21) International Application Number:

PCT/US2012/070858

(22) International Filing Date:

20 December 2012 (20.12.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Boulevard, Houston, TX 77072 (US).

(72) Inventors: **FRANKLIN, Matthew, Earl**; 650 Leora Ln., Apt. 11212, Lewisville, TX 75056 (US). **GRECI, Stephen, M.**; 3113 Luminara Dr., Little Elm, TX 75068 (US).

(74) Agents: **JORDAN, Carey, C.** et al.; McDermott Will & Emery LLP, The McDermott Building, 500 North Capitol Street N.W., Washington, D.C. 20001 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*

(54) Title: FLOW CONTROL DEVICES AND METHODS OF USE

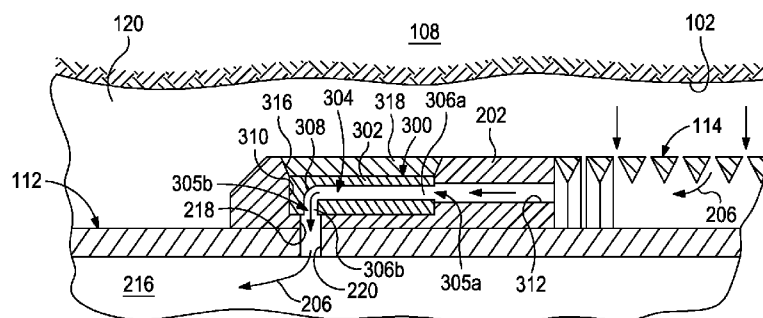


FIG. 3

(57) Abstract: Disclosed are improved flow control devices and methods of use thereof. One flow control device includes a body arranged within a cavity defined in a housing coupled to a base pipe, the housing defining a perforation and the base pipe defining one or more flow ports aligned with the perforation to allow fluid communication therethrough, and a flow chamber defined within the body and having a longitudinal portion and a radial portion, the radial portion being fluidly coupled to the perforation such that a fluid flowing through the flow chamber is conveyed directly to or from the perforation and the one or more flow ports.