



(51) International Patent Classification:
G08B 25/00 (2006.01) *H04W 4/029* (2018.01)

(21) International Application Number:
PCT/SG2018/050349

(22) International Filing Date:
13 July 2018 (13.07.2018)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
201741024772 13 July 2017 (13.07.2017) IN

(71) Applicant: **KAHA PTE. LTD.** [SG/SG]; 81, AYER RA-
JAH CRESCENT, #02-42, SINGAPORE 139967 (SG).

(72) Inventors: **GANDHI, Pawan**; S11, Ground Floor, Greater
Kailash Part 2, New Delhi 110048 (IN). **SHANTHARAM,**
Sudheendra; 170/D-1, 5TH Main, 3rd Phase, JP Nagar,
Bengaluru - 560078, Karnataka, Bengaluru 560078 (IN).

(74) Agent: **GATEWAY LAW CORPORATION**; 39 Robin-
son Road, #20-03 Robinson Point, Singapore 068911 (SG).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: A SYSTEM AND METHOD FOR TRANSMITTING AN ALERT FROM A WEARABLE DEVICE TO A USER NET-
WORK

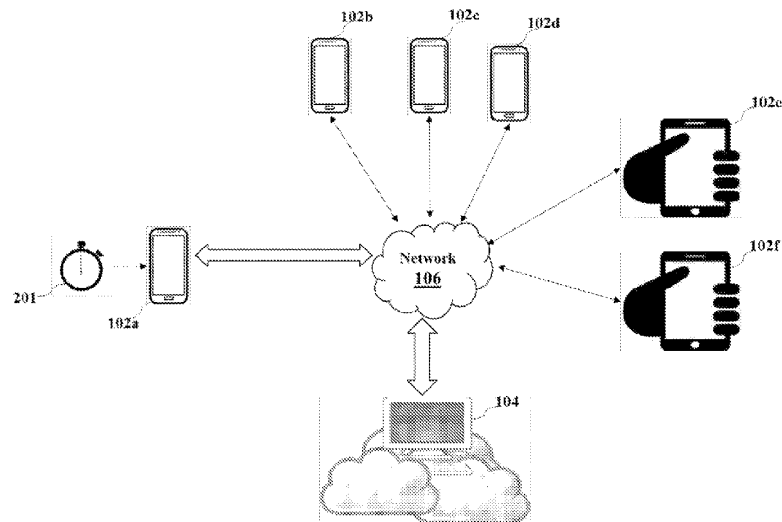


Fig 1

(57) **Abstract:** The invention discloses a system and method for transmitting an alert from a wearable device to a user network. The wearable device includes a trigger to initiate a situation and a coupling device to couple the trigger to a notification system to notify the situation to a set of persons in the user network. The notification system allows the registration of the user, at least one guardian and the set of persons. The notification system generates a dependability score for each of the set of persons. The notification system also determines the current geo-location of the user, the guardian and the set of persons to determine a first group of trusted 0 persons. The notification system transmits a first message to the first group of trusted persons and the guardian.

[Continued on next page]

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*