9702609-7

RTMP COPY

PCT - WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :		(11) International Publication Number:
H01R 13/62	A1	WO 96/18222
		(43) International Publication Date: 13 June 1996 (13.06.96)

(21) International Application Number: PCT/US95/15822

(22) International Filing Date: 6 December 1995 (06.12.95)

(30) Priority Data:
94203591.6 9 December 1994 (09.12.94) EP
(34) Countries for which the regional or international application was filed: NL et al.

(71) Applicant *(for all designated States except US)*: BERG TECHNOLOGY, INC. [US/US]; One East First Street, Reno, NV 89501 (US).

(72) Inventor; and
(75) Inventor/Applicant *(for US only)*: LIBREGTS, Hubertus, B. [NL/NL]; Newtonlaan 51, NL-5252 CJ Vlijmen (NL).

(74) Agents: LONG, Daniel, J. et al.; 825 Old Trail Road, Etters, PA 17319 (US).

(81) Designated States: CA, CN, JP, KR, SG, US.

Published
With international search report.

(54) Title: AN EJECTOR LATCH FOR LATCHING FIRST AND SECOND CONNECTORS

(57) Abstract
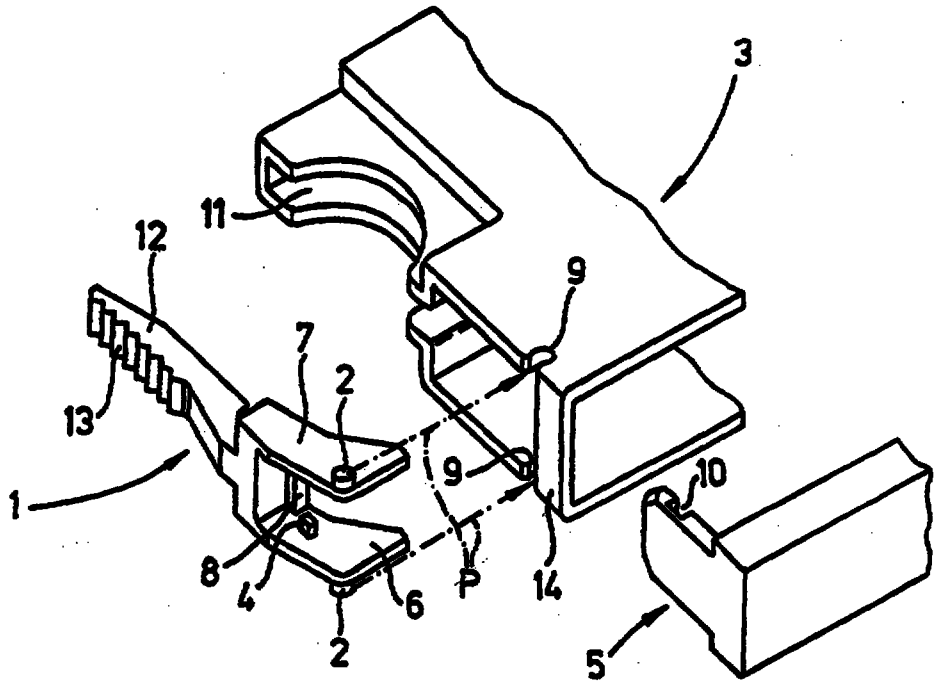
Assembly of mating first and second connectors (3, 5) and an ejector latch (1) for latching the mating connectors (3, 5), comprising first coupling means (2, 9) for coupling the ejector latch (1) to the first connector (3) and second coupling means (4, 10) for coupling the ejector latch (1) to the second connector (5), in latched position of which assembly the ejector latch (1) is coupled to both the first and the second connector (3, 5) whereas in unlatched position the ejector latch may be coupled to one of the connectors, whereby said second coupling means (4, 10) are constructed such as to provide a detachable coupling between said second connector (5) and said ejector latch (1) and whereby said first connector (3) and/or said ejector latch (1) are constructed such as to provide sufficient space to enable the unlatching of the connectors by moving the ejector latch (1) towards the first connector (3), thereby separating both the ejector latch (1) and the first connector (3) from the second connector (5).