

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 August 2002 (01.08.2002)

PCT

(10) International Publication Number
WO 02/059984 A2

(51) International Patent Classification⁷: **H01L 51/20**

WILLIAMS, R., Stanley; 105 Laurel Way, Mountain View, CA 94040 (US).

(21) International Application Number: PCT/US01/47477

(22) International Filing Date:
10 December 2001 (10.12.2001)

(74) Agent: **SCHUYLER, Marc, P.**; Hewlett-Packard Company, IPA, P.O. Box 272400, M/S 35, Fort Collins, CO 80527-2400 (US).

(25) Filing Language: English

(81) Designated States (*national*): JP, KR, SG.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(30) Priority Data:
09/738,793 14 December 2000 (14.12.2000) US

(71) Applicant: **HEWLETT-PACKARD COMPANY**
[US/US]; Legal Department, M/S 20BN, 3000 Hanover Street, Palo Alto, CA 94304-1126 (US).

Declaration under Rule 4.17:

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*


(72) Inventors: **BRATKOVSKI, Alexander**; 127 Laurel Way, Mountain View, CA 94040 (US). **ZHANG, Xiao-An**; 689 Grand Fir Avenue, Apt #2, Sunnyvale, CA 94086 (US).

Published:

— *without international search report and to be republished upon receipt of that report*

[Continued on next page]

(54) Title: STABILIZATION OF CONFIGURABLE MOLECULAR MECHANICAL DEVICES

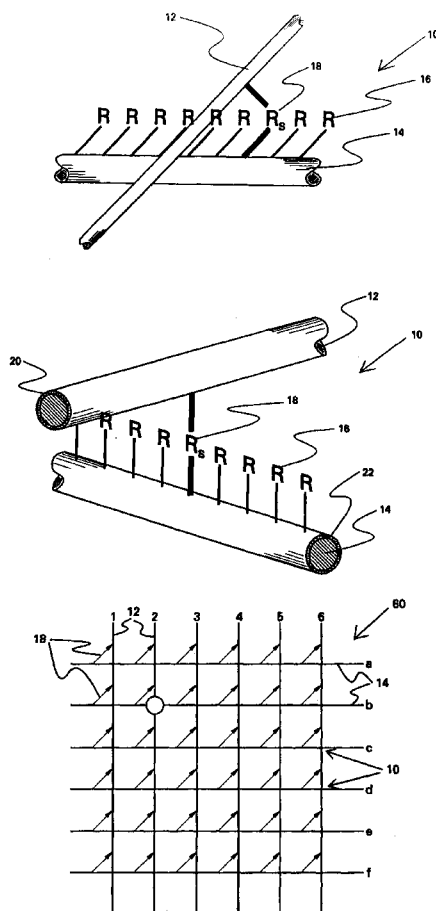

(57) Abstract: A route to the fabrication of electronic devices is provided, in which the devices consist of two crossed wires sandwiching an electrically addressable molecular species. The approach is extremely simple and simple and inexpensive to implement, and scales from wire dimensions of several micrometers down to nanometer-scale dimensions. The electronic devices can be used to produce crossbar switch arrays, logic devices, memory devices, and communication and signal routing devices. The construction of molecular electronic devices is achieved on a length scale that can range from micrometers to nanometers via a straightforward and inexpensive chemical assembly procedure. The molecular switchable devices in the cross-bar geometry are configurable while the conformational change is controlled by intramolecular forces that are stronger than hydrogen bonding. The method of the present invention is directed to configuring an ensemble of molecular switches in a prescribed manner in cross-bar geometry and then making such configuration either substantially permanent or stable with respect to temperature fluctuations.

WO 02/059984 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.