



(51) International Patent Classification:
B01D 17/04 (2006.01)

(21) International Application Number:
PCT/EP2009/055741

(22) International Filing Date:
12 May 2009 (12.05.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
08161473.7 30 July 2008 (30.07.2008) EP

(71) Applicant (for all designated States except US): **SULZER CHEMTECH AG** [CH/CH]; Sulzer-Allee 48, CH-8404 Winterthur (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GÄBLER, Ansoor** [DE/DE]; Gottlieber Str. 29a, 78462 Konstanz (DE). **GLÜER, Sven** [DE/CH]; Neustadtgasse 29, CH-8400 Winterthur (CH).

(74) Agents: **GERNET, Samuel** et al.; Sulzer Management AG, Zürcherstrasse 14, CH-8401 Winterthur (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND SYSTEM FOR PHASE INVERSION USING A STATIC MIXER/ COALESCER

Fig.7

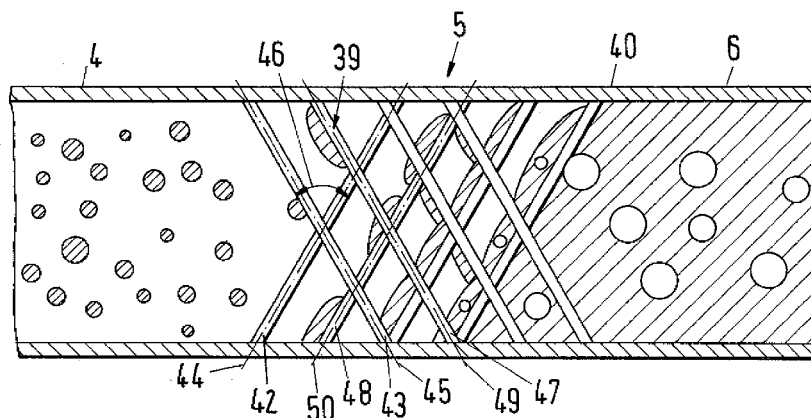

(57) Abstract: A method and a system for phase inversion of a dispersion are disclosed, the dispersion comprising a first fluid, said first fluid forming a disperse phase and a second fluid, said second fluid forming a continuous phase. The dispersion is supplied in a fluid supply device to a phase inversion means. Thereby the first fluid is transformed from the disperse phase into the continuous phase and the second fluid is transformed from the continuous phase into the disperse phase. The phase inversion means comprises an element providing a fluid contacting surface for coalescence in a direction of flow.