

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 July 2008 (31.07.2008)

PCT

(10) International Publication Number
WO 2008/091903 A3

(51) International Patent Classification:
H04N 7/14 (2006.01) **H04N 7/64** (2006.01)

(21) International Application Number:
PCT/US2008/051720

(22) International Filing Date: 22 January 2008 (22.01.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/625,787 22 January 2007 (22.01.2007) US

(71) Applicant (for all designated States except US): **QUALCOMM Incorporated** [US/US]; Attn: International Ip Administration, 5775 Morehouse Drive, San Diego, California 92121 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEE, Yen-chi** [CN/US]; 5775 Morehouse Drive, San Diego, California 92121 (US). **LEUNG, Nikolai Konrad Nepomuceno** [US/US]; 5775 Morehouse Drive, San Diego, California 92121 (US).

(74) Agents: **BACHAND, Richard A.** et al.; Attn: International Ip Administration, 5775 Morehouse Drive, San Diego, California 92121 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: ERROR FILTER TO DIFFERENTIATE BETWEEN REVERSE LINK AND FORWARD LINK VIDEO DATA ERRORS

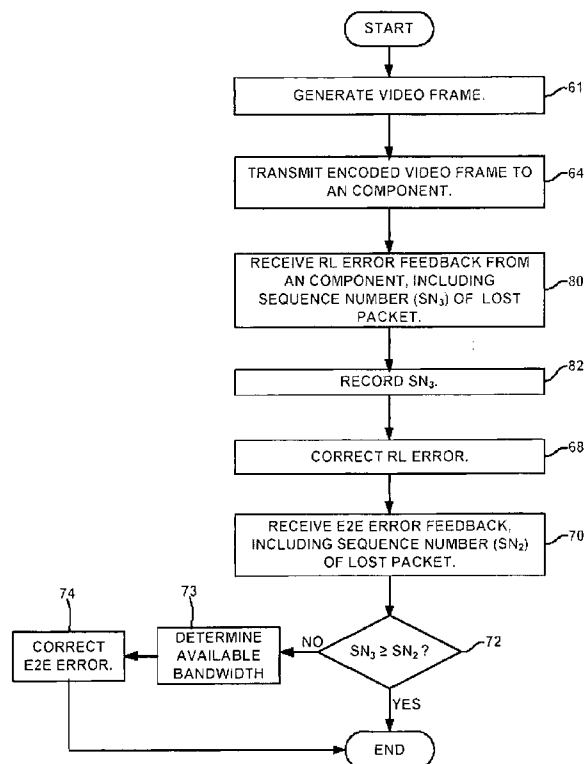


FIG. 4

(57) Abstract: One technique for implementing error control in response to a video data error comprises receiving an indication of a video data error from a video decoder, determining whether the video data error occurred on a reverse link of a wireless network between a video encoder and a network device, and applying error control in response to the video data error if the video data error did not occur on the reverse link. For example, the indication of the video data error may include a first sequence number (SN) of a packet comprising lost data, and determining whether the video data error occurred on the reverse link may include comparing first SN with a second SN of a packet associated with a most recent RL error.



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

(88) Date of publication of the international search report:

9 October 2008