

(43) International Publication Date
31 January 2013 (31.01.2013)

(51) International Patent Classification:

F24F 1/01 (2011.01) *F04D 25/08* (2006.01)
F24F 6/14 (2006.01) *F04D 29/70* (2006.01)
F24F 13/26 (2006.01) *F04F 5/16* (2006.01)

(21) International Application Number:

PCT/GB2012/051489

(22) International Filing Date:

26 June 2012 (26.06.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1112911.1	27 July 2011 (27.07.2011)	GB
1203888.1	6 March 2012 (06.03.2012)	GB
1203887.3	6 March 2012 (06.03.2012)	GB

(71) Applicant (for all designated States except US): **DYSON TECHNOLOGY LIMITED** [GB/GB]; Tetbury Hill, Malmesbury Wiltshire SN16 0RP (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STANFORTH, Mark** [GB/GB]; c/o Dyson Technology Limited, Tetbury Hill, Malmesbury Wiltshire SN16 0RP (GB). **PULLEN, Jude** [GB/GB]; c/o Dyson Technology Limited, Tetbury Hill, Malmesbury Wiltshire SN16 0RP (GB).

(74) Agents: **BOOTH, Andrew** et al.; Dyson Technology Limited, Intellectual Property Department, Tetbury Hill, Malmesbury Wiltshire SN16 0RP (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: A FAN ASSEMBLY

(57) Abstract: A fan assembly includes a nozzle and a base on which the nozzle is mounted. The nozzle has a first air inlet, a first air outlet, and a first interior passage for conveying air from the first air inlet to the first air outlet. The nozzle also includes a second air inlet, a plurality of second air outlets, and a second interior passage for conveying air from the second air inlet to the second air outlets. The nozzle defines a bore about which the interior passages extend and through which air from outside the fan assembly is drawn by air emitted from the air outlets. The body includes a motor and impeller unit for generating a first air flow through the first interior passage and a second air flow through the second interior passage. A first air passageway conveys the first air flow to the first air inlet and a second air passageway conveys the second air flow to the second air inlet. One of the temperature, humidity, composition and electrical charge of the second air flow is changed before it is emitted from the nozzle.

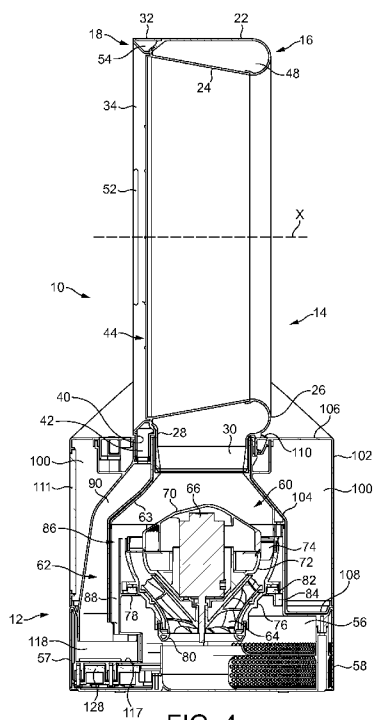


FIG. 4



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*