



(51) International Patent Classification:
H04R 25/00 (2006.01)

(21) International Application Number:
PCT/EP2011/073396

(22) International Filing Date:
20 December 2011 (20.12.2011)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **WIDEX A/S** [—/DK]; Nymoellevvej 6, DK-3540 Lyngby (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HAGED-ORN-OLSEN, Lars** [DK/DK]; Nymoellevvej 6, DK-3540 Lyngby (DK). **VAARBROE, Klaus Henrik** [DK/DK]; Nymoellevvej 6, DK-3540 Lyngby (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HEARING AID WITH A BUSHING FOR AN EAR WAX GUARD

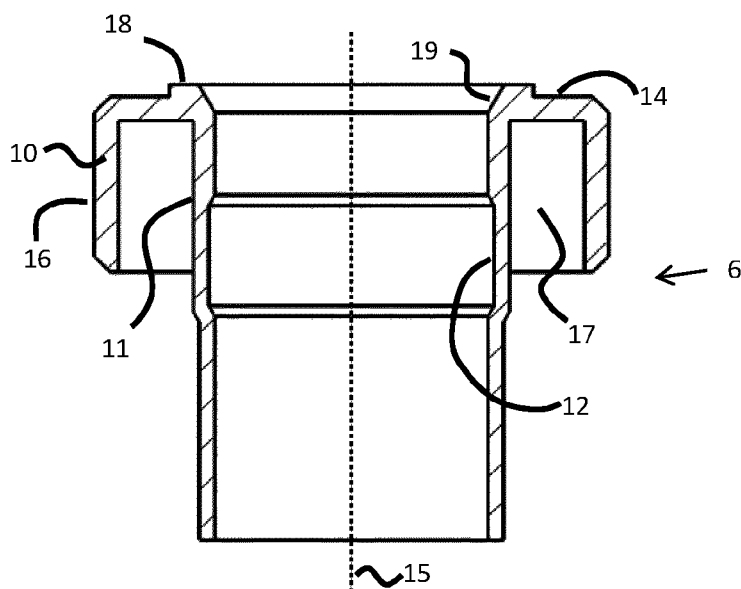


Figure 2

(57) Abstract: A hearing aid with an ear canal part prepared for being arranged in the ear canal. The ear canal part has a sound opening provided with a bushing for receiving an ear wax guard. The bushing comprises an inner tubular part for receiving the ear wax guard, where the inner tubular part is extending inward from the plane formed by the sound opening. The bushing further comprises an outer tubular part extending inward from this plane. The outer tubular part and the inner tubular part are arranged such that a space is formed in between. This space is adapted for receiving a sound guide.