



(51) International Patent Classification:
H04W 68/02 (2009.01)

(21) International Application Number:
PCT/EP2022/050807

(22) International Filing Date:
14 January 2022 (14.01.2022)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
63/137,799 15 January 2021 (15.01.2021) US

(71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)** [SE/SE]; SE-164 83 Stockholm (SE).

(72) Inventors: **ANDGART, Niklas**; Femmötesvägen 48, SE-247 33 SÖDRA SANDBY (SE). **NADER, Ali**; Jaktvagnsgatan 13, SE-212 42 MALMÖ (SE). **MALEKI, Sina**; Typografgatan 4B, SE-214 22 MALMÖ (SE). **REIAL, Andres**; Hammtorget 2C, SE-234 40 LOMMA (SE). **NIM-BALKER, Ajit**; 4241 Stanley Ave, FREEMONT, Cali-

fornia 94538 (US). **THANGARASA, Santhan**; Korgvidegränd 24, SE-162 44 VÄLLINGBY (SE).

(74) Agent: **ERICSSON**; Torshamnsgatan 21-23, 164 80 STOCKHOLM (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: MAPPING OF PAGING EARLY INDICATOR TO MULTIPLE PAGING OCCASIONS

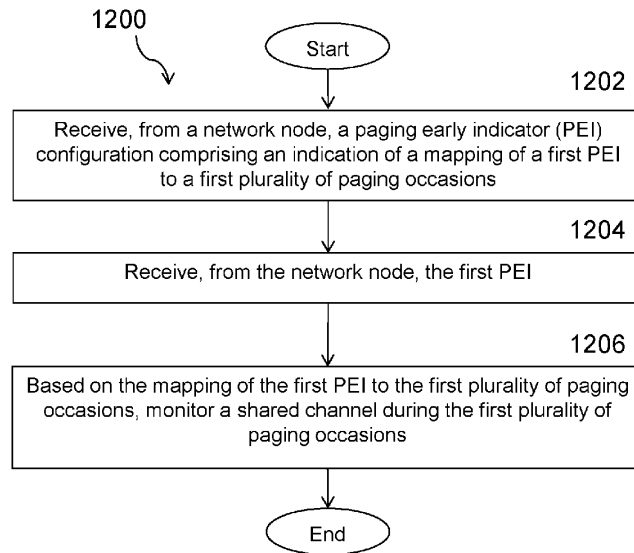


FIGURE 21

(57) Abstract: A method (1200) by a wireless device (110) includes receiving (1202), from a network node (160), a paging early indicator, PEI, configuration that includes an indication of a mapping of a PEI to a plurality of paging occasions, POs. The wireless device receives (1204) the PEI from the network node. Based on the mapping of the PEI to the plurality of POs, the wireless device monitors (1206) a shared channel during the plurality of POs.

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*