

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 October 2003 (16.10.2003)

PCT

(10) International Publication Number
WO 03/084804 A1

(51) International Patent Classification⁷: **B62J 6/06**, B60B 21/02, 21/12, B21D 53/30

(21) International Application Number: PCT/IB03/01292

(22) International Filing Date: 9 April 2003 (09.04.2003)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
PD2002U000029 9 April 2002 (09.04.2002) IT

(71) Applicant (for all designated States except US): **GLOW S.R.L.** [IT/IT]; Via V[^] Strada, 7, I-35023 Bagnoli Di Sopra (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ZAMPIERI, Daniele** [IT/IT]; Via Monte Verdi, 37, I-35026 Conselve (IT).

(74) Agent: **MAROSCIA, Antonio**; Maroscia & Associati S.R.L., Contrà S. Caterina, 29, I-36100 Vicenza (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RIM STRUCTURE PARTICULARLY FOR CYCLE WHEEL WITH VARIABLE MAGNETIC FIELD ELECTRIC GENERATOR

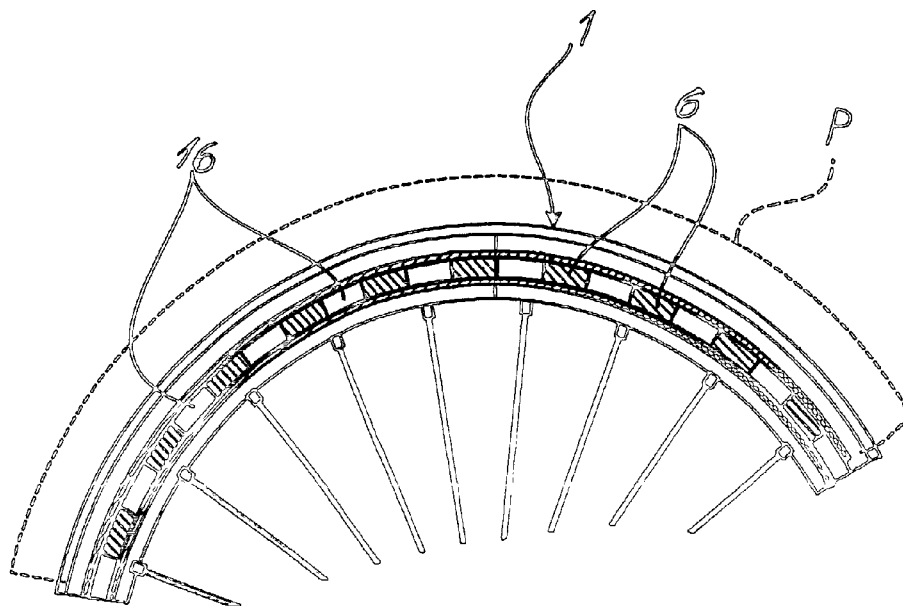

(57) Abstract: A rim structure, in particular for bicycles equipped with a current generator of the variable magnetic field type, comprises a circumferentially extending tubular body (2) from which a pair of opposite flanges (3) defining a seat (4) for housing a tyre (P) extends outwards. According to the invention the tubular body (2) comprises at least one annular peripheral side pocket (5) able to house a plurality of permanent magnets (6) aligned along one circumference. Spacer means (7) are also envisaged, said means being inserted in the side pocket (5) in order to keep the permanent magnets (6) at predetermined distances from each other.



WO 03/084804 A1