

(51) International Patent Classification:
H04W 36/00 (2009.01) *H04L 29/06* (2006.01)(21) International Application Number:
PCT/EP2010/059738(22) International Filing Date:
7 July 2010 (07.07.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/224,149 9 July 2009 (09.07.2009) US(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L M ERICSSON (publ)** [SE/SE]; S-164 83 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KELLER, Ralf** [DE/DE]; Talblick 22, 52146 Würselen (DE). **HALLENSTAL, Magnus** [SE/SE]; Täbyvägen 220, S-187 50 Täby (SE). **OLSSON, Magnus** [SE/SE]; Hantverkargatan 85, 1tr, S-112 38 Stockholm (SE). **LINDHOLM, Fredrik** [SE/SE]; Stamgatan 87, S-125 74 Älvsjö (SE).(74) Agents: **PFEIFER, Torsten** et al.; Ericsson Allee 1, 52134 Herzogenrath (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: METHODS AND DEVICES FOR IMPROVING SESSION CONTINUITY

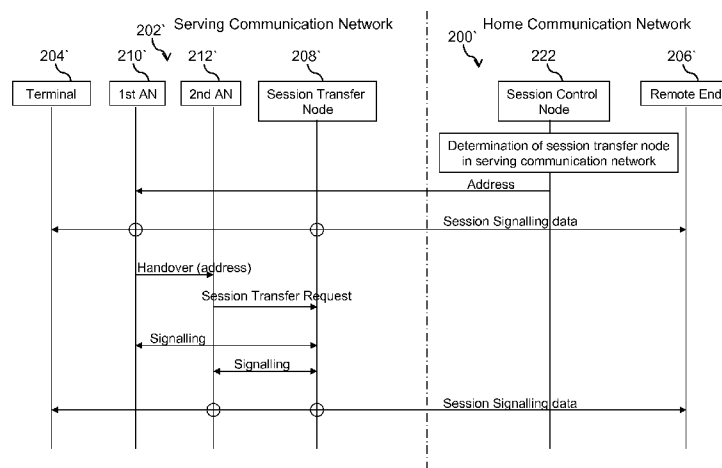


Fig. 2b

(57) **Abstract:** A method for improving session continuity for a terminal (204') in a serving communication network (202') distinct from a home communication network (200') of the terminal (204'), wherein the serving communication network (202') comprises a session transfer node (208') for transferring sessions each comprising signaling data and media data from a first access network (210') of the serving communication network (202') to a second access network (212') of the serving communication network (202') comprises the following: Routing signaling data of a session of the terminal (204') between the first access network (210') and the home communication network (200') via the session transfer node (208') in the serving communication network (202'), receiving a session transfer request requesting the transfer of the session from the first access network (210') to the second access network (212') for the terminal (204'), and transferring the session from the first access network (210') to the second access network (212'), and routing the signaling data of the session of the terminal (204') between the second access network (210') and the home communication network (200') via the session transfer node (208').