



(51) International Patent Classification:

B28C 7/02 (2006.01) *G05D 11/13* (2006.01)
B01F 15/00 (2006.01) *B01F 3/12* (2006.01)

(21) International Application Number:

PCT/EP2020/067670

(22) International Filing Date:

24 June 2020 (24.06.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

19182629.6 26 June 2019 (26.06.2019) EP

(71) Applicant: **SAINT-GOBAIN WEBER** [FR/FR]; Rue de Brie, 77170 SERVON (FR).

(72) Inventors: **OPDENBUSCH, Kersten**; Siebenbürgenstr. 1, 45711 DATTELN (DE). **BLAAKMEER, Jan**; Reevelde 11, 5685 HK BEST (NL). **NUNES LOBO, Bruno, Miguel**; Diabellistraat 8, 5654CS EINDHOVEN (NL). **PIERTZIK, Lutz**; Wahlscheider Strasse 73, 51766 EN-

GELSKIRCHEN (DE). **HOFMANN, Tanja**; Am Simmler 43, 65201 WIESBADEN (DE).


(74) Agent: **SAINT-GOBAIN RECHERCHE**; 39 quai Lucien Lefranc - BP 135, 93303 Aubervilliers Cedex (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: METHOD FOR MANUFACTURING MORTAR-BASED ELEMENTS

Fig. 1

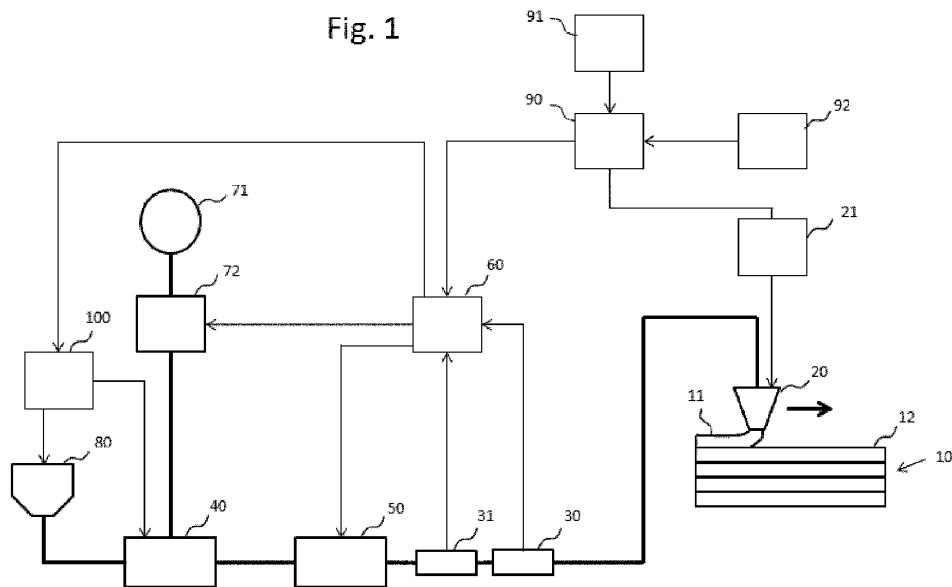

(57) Abstract: The invention relates to a method for manufacturing elements (10) comprising hydraulic binder and aggregates, said method comprising: - mixing a dry mortar composition comprising hydraulic binder and aggregates with water, to form a wet mortar, - pumping and conveying said wet mortar towards an outlet (20), wherein during said conveying at least two physical properties of the wet mortar are measured on- line, said physical properties including viscosity and at least one of flow and density.

[Continued on next page]

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))