



(51) International Patent Classification:

B65B 43/50 (2006.01) **B65G 1/137** (2006.01)
B65G 1/133 (2006.01) **B65G 47/84** (2006.01)

(21) International Application Number:

PCT/NO2011/000230

(22) International Filing Date:

23 August 2011 (23.08.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20101181 24 August 2010 (24.08.2010) NO

(71) Applicant (for all designated States except US): **JACOB HATTELAND LOGISTICS AS** [NO/NO]; N-5578 Nedre Vats (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HOGNALAND, Ingvar** [NO/NO]; N-5578 Nedre Vats (NO).

(74) Agents: **ONSAGERS AS** et al.; P.O.Box 6963 St. Olavs plass, N-0130 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ROTATING DEVICE FOR RECEIVING AND HANDLING GOODS

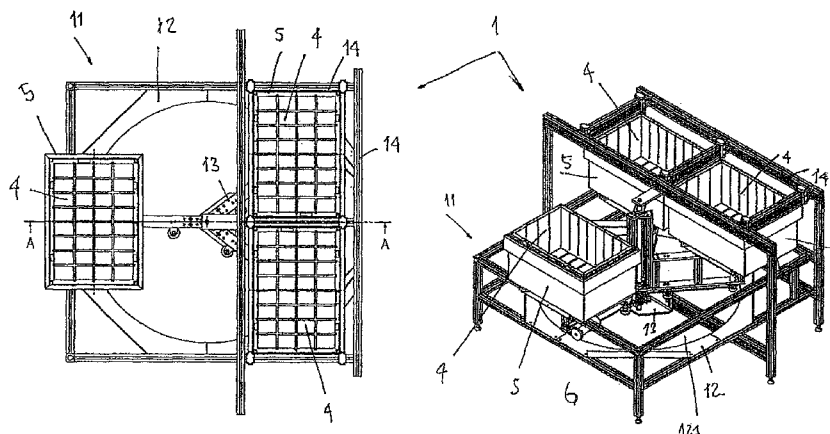


FIG 2

(57) Abstract: The present invention relates to a rotating device (1) for receiving and handling goods or products, where the device (1) comprises a number of holding devices (5) designed for receiving storage devices (4), where the holding devices (5) are rotatable about a central axis in the rotating device by means of a common drive arrangement, with the result that at least one holding device (5) with a received storage device (4) is made available to an operator, while at least one other holding device (5) is made available for receiving a storage device (4).