

(51) International Patent Classification:
C09K 8/68 (2006.01)(21) International Application Number:
PCT/EP2014/077538(22) International Filing Date:
12 December 2014 (12.12.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13196827.3 12 December 2013 (12.12.2013) EP(71) Applicant: **OMYA INTERNATIONAL AG** [CH/CH];
Baslerstrasse 42, CH-4665 Oftringen (CH).(72) Inventors: **GANTENBEIN, Daniel**; c/o Omya Hustad-
marmor, Sjøvegen 69, N-6440 Elnesvågen (NO).
SCHOELKOPF, Joachim; Buechbühlstrasse 3, CH-8956
Killwangen (CH). **GANE, Patrick A.C.**; Studenweg 8,
CH-4852 Rothrist (CH).(74) Agent: **GLAS, Holger**; Maiwald Patentanwalts GmbH,
Elisenhof, Elisenstraße 3, 80335 München (DE).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: IMPROVED GEL STABILITY

Figures

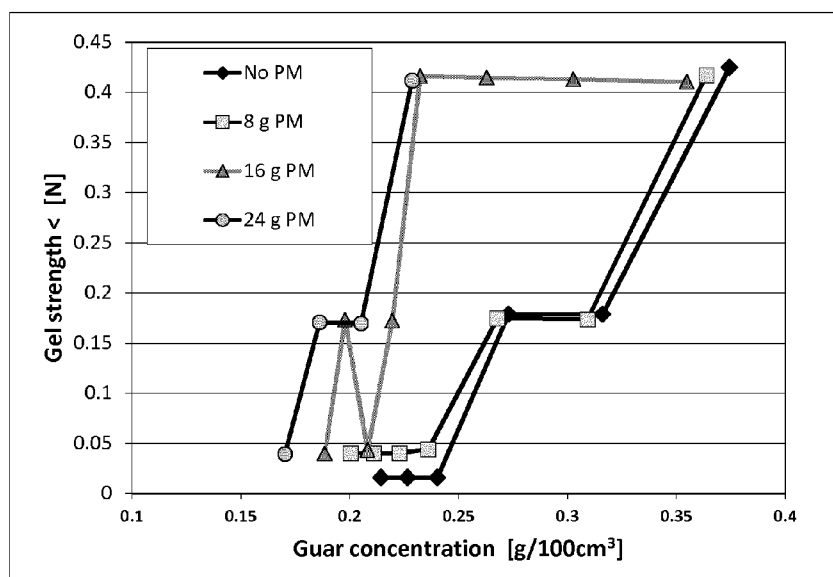


Fig. 1

(57) Abstract: The present invention relates to a composition having a gel strength of from 1.0 μ N to 10.0 N, a method of preparing a composition having a gel strength of from 1.0 μ N to 10.0 N, a method of hydraulically fracturing of a subterranean formation, preferably an oil well or gas well, a hydraulically fracturing fluid as well as the use of said composition for hydraulic fracturing of a subterranean formation. The present invention further relates to the gel and use of this gel in pharmaceutical applications, cosmetic applications, constructing applications, paper applications, paint applications, plastic applications, food applications and/or agricultural applications.

Published:

— *with international search report (Art. 21(3))*