

Description

1. Field of the Invention

This invention relates to phenylcyclohexyldioxane derivatives having ether bond which are useful as an electro-optical display material.

2. Prior Art

Representative examples of liquid crystal display devices include field-effect mode proposed by M. Schadt, et al., (APPLIED PHYSICS LETTERS, 18, 127-128 (1971)); dynamic scattering mode proposed by G. H. Heilmeier, et al., (PROCEEDING OF THE I.E.E.E., 56, 1162-1171 (1968)); and guest host mode proposed by G. H. Heilmeier, et al., (APPLIED PHYSICS LETTERS, 13, 91 (1968)), or by D. L. White, et al., (JOURNAL OF APPLIED PHYSICS, 45, 4718 (1974)).

Furthermore, the WO-A-86/04895 discloses a series of 2-[trans-4-(4-cyano-5-fluorophenyl)cyclohexyl]-5-alkyl-1,3-dioxanes which are useful as a component of electro-optical display materials, for example, to modify the anisotropy in dielectric constant of such materials.

The EP-A-0 315 014 discloses, among other compounds, a series of trans-2-[trans-4-(4-chloro- or 4,5-difluoro-phenyl)cyclohexyl]-5-alkenyl-1,3-dioxanes for use as components of electro-optical display materials having low threshold voltage values.

Among these types of liquid crystal display devices (LCDs), the twisted nematic liquid crystal display devices (TN-LCDs) which fall in the group of the field-effect mode cells currently are of greatest interest.


As reported by G. Bauer (Mol. Cryst. Liq. Cryst. 63, 45 (1981)), in the TN-LCDs, the product of the anisotropy, Δn , of refractive index of a liquid crystal material to be filled in a cell, and the thickness d (in μm) of the liquid crystal layer in the cell must be set to a specified value in order to prevent the occurrence of interference fringes on the surface of the cell, which could impair the appearance of the cell. In cells in practical use, the value of $\Delta n \cdot d$ is set to one of 0.5, 1.0, 1.6 or 2.2. Usually, such cells have a feature that when the value of $\Delta n \cdot d$ is set to 0.5, the visual appearance of the cell is improved, whereas when the value is set to 1.0, 1.6 or 2.2, the contrast of the cell viewed from the front is improved. Therefore, it is usual practice that in the case of liquid crystal display cells in which primary importance is placed on the visual characteristic that the cell be easily visible from all viewing angles, the value of $\Delta n \cdot d$ is set to 0.5; whereas in the case of liquid crystal display cells in which primary importance is attached to the contrast of cells viewed from the front, the value of $\Delta n \cdot d$ is set to 1.0, 1.6, or 2.2.

On the other hand, the thickness d of the liquid crystal layer in liquid crystal display cells in practical use is usually set to a value within the range of 6 to 10 μm , and hence when the value of $\Delta n \cdot d$ is set to 0.5, liquid crystal material having a small value of Δn is required; whereas when the value of $\Delta n \cdot d$ is set to 1.0, 1.6, or 2.2, a liquid crystal material having a large value of Δn must be used. As stated above, a liquid crystal material having a small or large value of Δn becomes necessary depending on which display characteristics are desired in the liquid crystal display cells.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a novel nematic liquid crystal compound which when mixed with a liquid crystal matrix can give rise to a liquid crystal mixture which has a decreased threshold voltage V_{th} , a smaller anisotropy in refractive index Δn , and a larger anisotropy in dielectric constant $\Delta\epsilon$.

In order to achieve the above-described object, this invention provides a compound represented by general formula (I) below.




wherein R represents a straight-chain alkyl group having 1 to 7 carbon atoms; n is an integer of 1 to 5; X represents Fluorine (F), Chlorine (Cl) or Cyano group (CN); Y represents Hydrogen (H) or F; and a dioxane ring in a trans configuration with respect to a cyclohexane ring.

The compound represented by general formula (I) according to the present invention has a small value of Δn and a large value of $\Delta\epsilon$, and as a result, when it is mixed with a nematic liquid crystal mixture which is currently being used generally as the typical liquid crystal matrix, the resulting mixture of a nematic liquid crystal and the conventional liquid crystal matrix can have an increased $\Delta\epsilon$ and a remarkably decreased threshold voltage without decrease or change of Δn .

Furthermore, the compound of this invention exhibits superior effects to the known compound having a similar chemical structure and is useful as a material for producing TN mode liquid crystal display cells which have excellent visual characteristics and can be driven at low voltages.

DETAILED DESCRIPTION OF THE INVENTION

The compound represented by general formula (I) can be prepared according to the following reaction scheme.

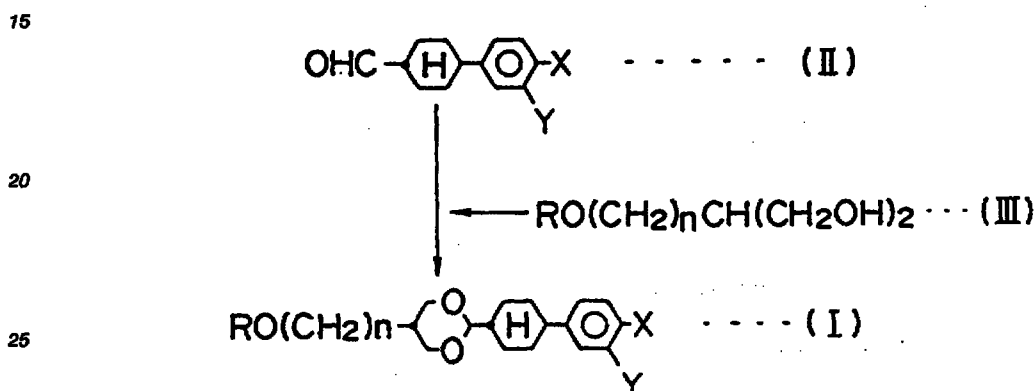

wherein R represents a straight-chain alkyl group having 1 to 7 carbon atoms; n is an integer of 1 to 5; X represents F, Cl or CN; Y represents H or F; and a dioxane ring in a trans configuration with respect to a cyclohexane ring.

The above reaction scheme is to produce a compound represented by general formula (II) and a compound represented by general formula (III) reacted in toluene in the presence of an acidic catalyst such as p-toluenesulfonic acid at a reflux temperature to effect dehydration.

The compound represented by general formula (I) is a nematic liquid crystal compound having a positive anisotropy in dielectric constant, and therefore it can be used, for example, as a material for dynamic scattering mode cells in a state of a mixture with another nematic liquid crystal compound having negative anisotropy in dielectric constant, or as a material for field effect mode cells in a state of mixture with another nematic liquid crystal compound having positive or negative anisotropy in dielectric constant.

Preferred examples of another nematic liquid crystal compound which can be used as an admixture with the liquid crystal compound of the present invention represented by general formula (I) include 4-substituted benzoic acid-4'-substituted phenyl ester, 4-substituted cyclohexanecarboxylic acid-4'-substituted phenyl ester, 4-substituted cyclohexanecarboxylic acid-4'-substituted biphenyl ester, 4-(4-substituted cyclohexanecarbonyloxy)benzoic acid-4'-substituted phenyl ester, 4-(4-substituted cyclohexyl)benzoic acid-4'-substituted cyclohexyl ester, 4-substituted-4'-substituted biphenyl, 4-substituted phenyl-4'-substituted cyclohexane, 4-substituted-4'-substituted terphenyl, 4-substituted biphenyl-4'-substituted cyclohexane, and 2-(4'-substituted phenyl)-5-substituted pyrimidine.


EXAMPLES

This invention will be described in greater detail by way of examples. However, this invention is not restricted thereto.

In the examples, symbols T_{CS} , T_{CN} , T_{SN} and T_{NI} designate a temperature of transition from a crystal phase to a smectic phase, a temperature of transition from a crystal phase to a nematic phase, a temperature of transition from smectic phase to a nematic phase, and a temperature of transition from nematic phase to an isotropic liquid phase, respectively.


Example 1

To 3.1 g (0.021 mol) of a compound of formula $\text{CH}_3\text{O}(\text{CH}_2)_3\text{CH}(\text{CH}_2\text{OH})_2$, and 4.7 g (0.021 mol) of a compound represented by the formula:



were added 50 ml of toluene and 0.040 g (0.00021 mol) of p-toluenesulfonic acid monohydrate, and the resulting mixture was stirred at a reflux temperature for 3 hours to carry out a dehydration reaction. After cooling the reaction mixture to room temperature, the toluene portion was washed with a saturated aqueous sodium hydrogen carbonate solution and then with saturated saline, and dried. Thereafter, toluene was evaporated off to obtain a crude product.


This product was purified using silica gel column chromatography and then recrystallized from ethanol to obtain 3.8 g (0.011 mol) of a compound represented by the following formula to give a yield of 52%.



The liquid crystal compound had following transition temperatures; T_{CS} was 71°C , T_{SN} was 77°C and T_{NI} was 95°C .

Example 2


The procedures in Example 1 were repeated except that in place of the compound represented by formula



a compound represented by formula



was used to obtain a compound represented by the following formula to give a yield of 62%.




The liquid crystal compound thus obtained had following transition temperatures; T_{CN} was 107°C and T_{NI} was 123°C .

Example 3

The procedures in Example 1 were repeated except that in place of the compound represented by formula $\text{CH}_3\text{O}(\text{CH}_2)_3\text{CH}(\text{CH}_2\text{OH})_2$, a compound represented by formula $\text{CH}_3\text{OCH}_2\text{CH}(\text{CH}_2\text{OH})_2$ was used to


obtain a compound represented by the following formula to give a yield of 30%.



10 The liquid crystal compound thus obtained had following transition temperatures; T_{CN} was 81°C and T_{NI} was 87°C .

Example 4


15 The procedures in Example 3 were repeated except that in place of the compound represented by formula



a compound represented by formula




30 was used to obtain a compound represented by the following formula to give a yield of 23%.




The liquid crystal compound thus obtained had following transition temperatures; T_{CN} was 95°C and T_{NI} was 121°C .

40 Example 5


The procedures in Example 1 were repeated except that in place of the compound represented by formula



50 a compound represented by formula




was used to obtain a compound represented by the following formula to give a yield of 61%.




The liquid crystal compound thus obtained had following transition temperatures; T_{CS} was 80°C , T_{SN} was 83°C and T_{NI} was 142°C .

Example 6


The procedures in Example 3 were repeated except that in place of the compound represented by formula



a compound represented by formula




was used to obtain a compound represented by the following formula to give a yield of 17%.




The liquid crystal compound thus obtained had following transition temperatures; T_{CN} was 89°C and T_{NI} was 138°C .

Example 7


The procedures in Example 1 were repeated except that in place of the compound represented by formula



a compound represented by formula




was used to obtain a compound represented by the following formula to give a yield of 56%.




The liquid crystal compound thus obtained had following transition temperatures; T_{CN} was 82°C and T_{NI} was 106°C .

Example 8


The procedures in Example 3 were repeated except that in place of the compound represented by formula



5.0 g (0.023 mol) of a compound represented by formula




was used to obtain a compound represented by the following formula to give a yield of 36%.




The liquid crystal compound thus obtained had following transition temperatures; T_{CN} was 115°C and T_{NI} was 209°C .

Example 9


The procedures in Example 1 were repeated except that in place of the compound represented by formula



a compound represented by formula




was used to obtain a compound represented by the following formula to give a yield of 53%.




The liquid crystal compound thus obtained had following transition temperatures; T_{CN} was 117°C and T_{NI} was 200°C .

10 Example 10


The procedures in Example 1 were repeated except that in place of the compound represented by formula



a compound represented by formula



was used to obtain a compound represented by the following formula to give a yield of 49%.




The liquid crystal compound thus obtained had following transition temperatures; T_{CN} was 103°C and T_{NI} was 162°C .

Table 1 below shows the phase transition temperatures of the liquid crystal compounds obtained in Examples 1 to 10, respectively.

Table 1

5



10

Example	n	X in Formula (I)	Y	Phase Transition Temperature (°C)		
1	3	F	F	T _{C/S} :71	T _{S/N} :77	T _{N/I} :95
2	3	F	H	T _{C/N} :107	T _{N/I} :123	
3	1	F	F	T _{C/N} :81	T _{N/I} :87	
4	1	F	H	T _{C/N} :95	T _{N/I} :121	
5	3	Cl	H	T _{C/S} :80	T _{S/N} :83	T _{N/I} :142
6	1	Cl	H	T _{C/N} :89	T _{N/I} :138	
7	3	Cl	F	T _{C/N} :82	T _{N/I} :106	
8	1	CN	H	T _{C/N} :115	T _{N/I} :209	
9	3	CN	H	T _{C/N} :117	T _{N/I} :200	
10	3	CN	F	T _{C/N} :103	T _{N/I} :162	

15

20

25

30

35

In Table 1, symbols T_{CS}, T_{CN}, T_{SN} and T_{NI} designate a transition temperature from a crystal phase to a smectic phase, a transition temperature from a crystal phase to a nematic phase, a transition temperature from a smectic phase to a nematic phase and a transition temperature from a nematic phase to an isotropic liquid phase, respectively.

Application Example

A liquid crystal mixture composed of 80% by weight of the liquid crystal matrix (A), described below currently in general use as a nematic liquid crystal material and 20% by weight of the liquid crystal obtained in any one of Examples 1 to 10, was examined to measure its threshold voltage, anisotropy in refractive index Δn, and anisotropy in dielectric constant Δε. For comparison, the threshold voltage of the liquid crystal matrix (A) itself was measured, as well a liquid crystal mixture composed of 80% by weight of the liquid crystal matrix (A) and 20% by weight of a liquid crystal compound (a) having a chemical structure similar to that of the liquid crystal compound obtained in Example 1. Table 2 shows the results obtained.

55

Table 2

Liquid Crystal	Δn	$\Delta \epsilon$	Threshold Voltage (V)
(A) alone	0.092	6.7	1.60
(A) and Compound of Example 1	0.090	8.1	1.35
(A) and Compound of Example 2	0.092	7.3	1.52
(A) and Compound of Example 3	0.089	8.9	1.29
(A) and Compound of Example 4	0.092	7.8	1.46
(A) and Compound of Example 5	0.098	8.5	1.56
(A) and Compound of Example 6	0.098	8.9	1.47
(A) and Compound of Example 7	0.096	9.3	1.39
(A) and Compound of Example 8	0.106	12.6	1.40
(A) and Compound of Example 9	0.105	10.0	1.47
(A) and Compound of Example 10	0.100	11.7	1.29
(A) and compound (a)	0.096	6.2	1.92

The liquid crystal matrix (A) has the following composition:

20% by weight of $n\text{-C}_3\text{H}_7\text{---}\langle\text{H}\rangle\text{---}\langle\text{O}\rangle\text{---}\text{CN}$

16% by weight of $n\text{-C}_5\text{H}_{11}\text{---}\langle\text{H}\rangle\text{---}\langle\text{O}\rangle\text{---}\text{CN}$

16% by weight of $n\text{-C}_7\text{H}_{15}\text{---}\langle\text{H}\rangle\text{---}\langle\text{O}\rangle\text{---}\text{CN}$

8% by weight of $n\text{-C}_3\text{H}_7\text{---}\langle\text{H}\rangle\text{---}\text{COO---}\langle\text{O}\rangle\text{---}\text{OC}_2\text{H}_5$

8% by weight of $n\text{-C}_3\text{H}_7\text{---}\langle\text{H}\rangle\text{---}\text{COO---}\langle\text{O}\rangle\text{---}\text{O---}n\text{-C}_4\text{H}_9$


8% by weight of $n\text{-C}_4\text{H}_9\text{---}\langle\text{H}\rangle\text{---}\text{COO---}\langle\text{O}\rangle\text{---}\text{OCH}_3$

8% by weight of $n\text{-C}_4\text{H}_9\text{---}\langle\text{H}\rangle\text{---}\text{COO---}\langle\text{O}\rangle\text{---}\text{OC}_2\text{H}_5$

8% by weight of $n\text{-C}_5\text{H}_{11}\text{---}\langle\text{H}\rangle\text{---}\text{COO---}\langle\text{O}\rangle\text{---}\text{OCH}_3$

8% by weight of $n\text{-C}_5\text{H}_{11}\text{---}\langle\text{H}\rangle\text{---}\text{COO---}\langle\text{O}\rangle\text{---}\text{OC}_2\text{H}_5$


The liquid crystal compound (a) is a known compound (cf. Japanese Patent Publication. No. 44132/1988) represented by the following formula



The results shown in Table 2 confirmed that the mixing of the known liquid crystal compound (a) with the liquid crystal matrix (A) gave rise to undesirably increased Δn , decreased $\Delta \epsilon$, and considerably elevated threshold voltage to the mother liquid crystal (A), in contrast to the liquid crystal compound represented by formula (I) according to the present invention gave rise to an increased $\Delta \epsilon$ and remarkably decreased threshold voltage without decrease or change of Δn , of the liquid crystal mixture.

Claims

1. A compound represented by general formula (I) below.




wherein R represents a straight chain alkyl group having 1 to 7 carbon atoms; n is an integer of 1 to 5; X represents Fluorine (F), Chlorine (Cl) or cyano group (CN); Y represents Hydrogen (H) or Fluorine (F); and a dioxane ring in a trans configuration with respect to a cyclohexane ring.

2. The compound as claimed in Claim 1, wherein X represents F or Cl.
3. The compound as claimed in Claim 1, wherein X is CN.
4. A liquid crystal mixture essentially consisting of the compound as claimed in Claim 1.
5. The compound as claimed in Claim 1, used for a liquid crystal material as a display.


Patentansprüche

1. Verbindung der allgemeinen Formel (I)



in der R einen geradkettigen Alkylrest mit 1 bis 7 Kohlenstoffatomen bedeutet, n eine Zahl von 1 bis 5 bedeutet, X Fluor (F), Chlor (Cl) oder eine Cyanogruppe (CN) bedeutet; Y Wasserstoff (H) oder Fluor (F) bedeutet; und der Dioxanring in trans-Konfiguration in bezug zum Cyclohexanring steht.

2. Verbindung nach Anspruch 1, in der X F oder Cl bedeutet.
3. Verbindung nach Anspruch 1, in der X CN bedeutet.
4. Flüssigkristallgemisch, das im wesentlichen aus der Verbindung nach Anspruch 1 besteht.
5. Verbindung nach Anspruch 1, zur Verwendung für ein Flüssigkristallmaterial als Anzeige.



5


The results shown in Table 2 confirmed that the mixing of the known liquid crystal compound (a) with the liquid crystal matrix (A) gave rise to undesirably increased Δn , decreased $\Delta\epsilon$, and considerably elevated threshold voltage to the mother liquid crystal (A), in contrast to the liquid crystal compound represented by formula (I) according to the present invention gave rise to an increased $\Delta\epsilon$ and remarkably decreased threshold voltage without decrease or change of Δn , of the liquid crystal mixture.

10

Claims

1. A compound represented by general formula (I) below.

15



20

wherein R represents a straight chain alkyl group having 1 to 7 carbon atoms; n is an integer of 1 to 5; X represents Fluorine (F), Chlorine (Cl) or cyano group (CN); Y represents Hydrogen (H) or Fluorine (F); and a dioxane ring in a trans configuration with respect to a cyclohexane ring.

25

2. The compound as claimed in Claim 1, wherein X represents F or Cl.
3. The compound as claimed in Claim 1, wherein X is CN.
4. A liquid crystal mixture essentially consisting of the compound as claimed in Claim 1.
5. The compound as claimed in Claim 1, used for a liquid crystal material as a display.


30

Patentansprüche

35

1. Verbindung der allgemeinen Formel (I)

40



45

in der R einen geradkettigen Alkylrest mit 1 bis 7 Kohlenstoffatomen bedeutet, n eine Zahl von 1 bis 5 bedeutet, X Fluor (F), Chlor (Cl) oder eine Cyanogruppe (CN) bedeutet; Y Wasserstoff (H) oder Fluor (F) bedeutet; und der Dioxanring in trans-Konfiguration in bezug zum Cyclohexanring steht.

50


2. Verbindung nach Anspruch 1, in der X F oder Cl bedeutet.
3. Verbindung nach Anspruch 1, in der X CN bedeutet.
4. Flüssigkristallgemisch, das im wesentlichen aus der Verbindung nach Anspruch 1 besteht.
5. Verbindung nach Anspruch 1, zur Verwendung für ein Flüssigkristallmaterial als Anzeige.

55



Revendications

1. Composé représenté par la formule générale (I) ci-dessous :



dans laquelle R représente un groupe alkyle à chaîne droite ayant 1 à 7 atomes de carbone, n est un nombre entier de 1 à 5, X représente du fluor (F), du chlore (Cl) ou un groupe cyano (CN), Y représente de l'hydrogène (H) ou du fluor (F), et dans laquelle un cycle de dioxanne est en configuration trans par rapport à un cycle cyclohexane.

2. Composé selon la revendication 1, dans lequel X représente F ou Cl.
3. Composé selon la revendication 1, dans lequel X est CN.
4. Mélange de cristaux liquides constitué essentiellement du composé selon la revendication 1.
5. Composé selon la revendication 1 utilisé comme matériau à cristaux liquides pour un dispositif d'affichage.