

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



WIPO | PCT



(10) International Publication Number
WO 2014/039435 A9

(43) International Publication Date
13 March 2014 (13.03.2014)

(51) International Patent Classification:
E21B 43/114 (2006.01) *E21B 10/60* (2006.01)
E21B 17/02 (2006.01)

(21) International Application Number:
PCT/US2013/057827

(22) International Filing Date:
3 September 2013 (03.09.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/608,637 10 September 2012 (10.09.2012) US

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Boulevard, Houston, Texas 77072 (US).

(72) Inventors: **JONES, Desmond**; 815 Twelve Acre lane, Duncan, Oklahoma 73533 (US). **SURJAATMADJA, Jim Basuki**; 1105 Timbercreek Drive, Duncan, Oklahoma 73533 (US). **HOLDEN, Dustin**; 2600 South 2nd Street, Duncan, Oklahoma 73533 (US).

(74) Agents: **ANJOM, Masood** et al.; Baker Botts LLP, 910 Louisiana Street, Houston, Texas 77002 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR SECURING AND USING HYDRAJETTING TOOLS

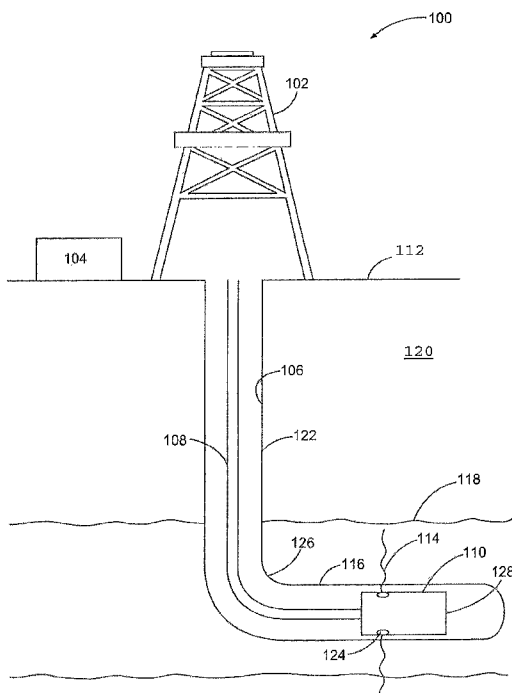


Fig. 1

(57) Abstract: A method and apparatus for securing and using hydrajetting tools within a borehole is described. The apparatus includes a housing that defines an inner bore. A flow limiting member may be disposed within the inner bore. The flow limiting member may include a first jet in fluid communication with the top of the housing, a first chamber positioned below and in fluid communication with the first jet, and a first cavity aligned with the first jet and in fluid communication with the chamber. A groove may be disposed on an outer surface of the housing, with an anchor assembly that is disposed around the housing and axially slidable and securable within the groove.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(48) Date of publication of this corrected version:

20 November 2014

Published:

- *with international search report (Art. 21(3))*
- *with information concerning authorization of rectification of an obvious mistake under Rule 91.3 (b) (Rule 48.2(i))*

(15) Information about Correction:

see Notice of 20 November 2014